

INFUSER FOR ALCOHOLIC BEVERAGES

OBJECT OF THE INVENTION

The object of the present invention application is to register an infuser
5 for alcoholic beverages which incorporates notable innovations and
advantages with respect to the techniques used hitherto.

More specifically, the invention proposes the development of an
infuser for alcoholic beverages which, due to the particular arrangement
10 thereof, allow alcoholic beverages with variable graduation to be obtained,
suitable for human consumption, automatically mixing ethyl alcohol diluted
with a food essence.

BACKGROUND OF THE INVENTION

15 Fermented cereals, the juice of fruits and honey are known in the
current state of the art, which have been used for thousands of years to
produce alcohol (ethyl alcohol or ethanol).

Fermented beverages have existed since the dawn of Egyptian
20 civilization and there is evidence of a primitive alcoholic beverage in China
around the year 7000 BC. In India, an alcoholic beverage called sura,
distilled from rice, was used between the years 3000 and 2000 BC.

Alcoholic beverages are beverages which contain ethanol (ethyl
25 alcohol) in the composition thereof. In terms of the preparation, a distinction
can be made between the beverages produced simply by alcoholic
fermentation (wine, beer, cider, mead, sake) in which the alcohol content
does not always exceed 15 degrees of alcohol and those produced by
distillation, generally from a previous fermentation product. The latter are
30 called liquors and include beverages with very varied characteristics,
beverages such as cognac, whiskey, spirits, anises, vermouth, amongst

others.

The quantity of alcohol content in an alcoholic beverage is determined by the volume thereof (ml of alcohol) or by the graduation thereof (degrees).

5

There are essences on the market suitable for human consumption with flavors of the beverages previously mentioned and which can be infused with ethyl alcohol diluted in water. It is therefore desirable to be able to prepare these alcoholic infusions with comfort and safety without running risks of ethylic intoxication.

10

The present invention helps to solve and address the present problem, since it allows alcoholic beverages with variable graduation to be obtained, suitable for human consumption, automatically mixing ethyl alcohol diluted with a food essence.

15

DESCRIPTION OF THE INVENTION

The present invention has been developed with the aim of providing an infuser for alcoholic beverages which comprises an ethyl alcohol and a water source which are hydraulically connected with a volumetric mixing chamber, a capsule holder downstream of the volumetric chamber for placement of monodose capsules of essences and injection and extraction means of the liquid from the volumetric chamber inside the capsule, characterized by the fact that the connection of the ethyl alcohol tank and the water source with the volumetric chamber is implemented by way of shut-off solenoid valves and the volumetric chamber comprising, in the interior thereof, a main electrode and a plurality of secondary electrodes arranged above the first main electrode at different levels.

20

25

Preferably, in the infuser for alcoholic beverages, the shut-off solenoid valves are individual.

30

Alternatively, in the infuser for alcoholic beverages, the shut-off solenoid valves are in a single block.

Alternatively, in the infuser for alcoholic beverages, the shut-off
5 solenoid valves are non-return valves hydraulically connected with the volumetric chamber.

Preferably, in the infuser for alcoholic beverages, the injection and extraction means comprise a pump with any type of drive and with electric
10 actuation, hydraulically connected with the volumetric chamber and a plurality of injection and extraction needles hydraulically connected with the volumetric chamber.

Preferably, in the infuser for alcoholic beverages, the pump is a
15 peristaltic pump.

Preferably, in the infuser for alcoholic beverages, the water source comprises at least one water tank or an outlet for the supply of water from the public drinking water system.
20

Alternatively, in the infuser for alcoholic beverages, the ethyl alcohol tank and/or the water tank incorporate automatic shut-off valves.

Additionally, in the infuser for alcoholic beverages, the ethyl alcohol
25 tank and/or the water tank incorporate level sensors.

Additionally, in the infuser for alcoholic beverages, the capsule holder comprises an indicator of the presence or absence of capsules.

30 Preferably, the infuser for alcoholic beverages comprises a locking means.

Additionally, in the infuser for alcoholic beverages, the locking means is electronic.

Alternatively, in the infuser for alcoholic beverages, the volumetric
5 chamber is connected to at least one flowmeter or any flow measuring device.

Preferably, the infuser for alcoholic beverages incorporates an
10 electronic control unit.

Preferably, the infuser for alcoholic beverages incorporates a
communication interface for the user to communicate with the control unit.

Preferably, in the infuser for alcoholic beverages, the interface
15 comprises a touch screen or wireless means.

Additionally, the infuser for alcoholic beverages incorporates an
internal or external power source.

20 Additionally, the infuser for alcoholic beverages incorporates a single-use or rechargeable battery.

Owing to the present invention, alcoholic beverages with variable
graduation suitable for human consumption are obtained, automatically
25 mixing ethyl alcohol diluted with a food essence.

Other characteristics and advantages of the infuser for alcoholic
beverages will be evident from the description of a preferred, but not
exclusive, embodiment, which is illustrated by way of non-limiting example in
30 the drawings, which are included, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1- is a schematic view of a preferred embodiment of the infuser for alcoholic beverages of the present invention.

5 Figure 2- is a schematic view of the volumetric chamber of a preferred embodiment of the infuser for alcoholic beverages of the present invention.

 Figure 3- is a schematic and perspective view of a preferred embodiment of the infuser for alcoholic beverages of the present invention,
10 implemented for the operation and service thereof in the manner of a small domestic appliance such as for example a coffee maker.

DESCRIPTION OF A PREFERRED EMBODIMENT

 As is schematically depicted in Figure 1, the infuser for alcoholic
15 beverages of the present invention comprises an ethyl alcohol tank 1 and a water source which are hydraulically connected with a volumetric mixing chamber 3, a capsule holder 5 downstream of the volumetric chamber 3 for placement of monodose capsules of essences and injection and extraction means of the liquid from the volumetric chamber 3 inside the capsule.

20

 In this preferred embodiment, the water source comprises a water tank 1'. Various water tanks may be arranged, where appropriate, if it is desired to be able to apply different types of water.

25 In other preferred embodiments not depicted in the drawings, the water source can be an outlet for the supply of water from the public drinking water system.

 The connection of the ethyl alcohol tank 1 and the water tank 1' with
30 the volumetric chamber 3 is implemented by way of shut-off solenoid valves 2, 2'.

The volumetric chamber 3 comprises, in the interior thereof, a main electrode 31 and a plurality of secondary electrodes 32 arranged above the first main electrode 31 at different levels (indicated by the dashed lines) as is schematically observed in Figure 2.

5

In other variants not depicted in the drawings, the water tank 1' can be substituted by a pump and a connection which allows liquid to be pumped from a bottle or auxiliary tank. The infusions can thus be prepared with other elements (tonic, sparkling water...). Whereas, improved cleaning means would be required to avoid sugar deposits or other substances.

10

In this preferred embodiment, the shut-off solenoid valves 2, 2' are individual. In other preferred embodiments, the shut-off solenoid valves 2, 2' can be in a single block or be non-return valves hydraulically connected with the volumetric chamber 3.

15

Preferably, in the infuser for alcoholic beverages, the injection and extraction means of the liquid from the volumetric chamber 3 inside the capsule comprise a pump 4 which, in this preferred embodiment is peristaltic and electrically actuated, hydraulically connected with the volumetric chamber 3 and a plurality of injection and extraction needles (not depicted in the drawings) for the capsules, hydraulically connected with the volumetric chamber 3.

20

The infuser for alcoholic beverages of the invention incorporates an electronic control unit 7, with the capacity to regulate the solenoid valves 2, 2' and the pump 4. It also incorporates a communication interface 9 for the user to communicate with the control unit 7 which can comprise a touch screen or wireless means 8.

25

30

The alcohol and the water are respectively transferred to the

volumetric chamber 3 from the alcohol tank 1 and the water tank 1' by means of the solenoid valves 2, 2' and the pump 4 which is filled to a final established volume V_f .

5 During the operation of the infuser for alcoholic beverages of the invention, a minimum determined volume of alcohol of the alcohol tank 1 is assumed which can be diluted with water from the water tank 1' until the final volume V_f is reached with the desired graduation in the volumetric chamber 3. The control unit 7 is responsible for calculating how much alcohol and how
10 much water should be taken from each tank 1, 1' respectively and accordingly the same control unit 7 regulates the solenoid valves 2, 2'.

When the final volume V_f is obtained in the volumetric chamber 3, the mixture is extracted from the volumetric chamber 3 by means of the pump 4
15 to the capsule holder 5, where it is infused in a monodose capsule which contains a food essence, from which the content is extracted to the final receptacle 6.

As has already been cited, the infuser for alcoholic beverages of the invention incorporates a control unit 7 with the capacity to regulate the
20 solenoid valves 2, 2' and the pump 4 which also calculates the quantities of alcohol and water to be extracted as a function of the information introduced by the user themselves into the interface.

25 Determining the required volumes of water and diluted alcohol can be controlled by means of a volumetric chamber 3 schematically depicted in Figure 2 which has a main electrode 31 and a series of secondary electrodes 32 at different levels depicted by lines in Figure 2 and above the main electrode 31.

30

The secondary electrodes 32 are arranged vertically and separate

downwards from the same level. Each secondary electrode 32 reaches a depth of interest inside the volumetric chamber 3.

5 The alcohol volume is determined by a secondary electrode 32 selected by the control unit 7 which has an electric connection by way of the liquid with the main electrode 31. The volumetric chamber 3 is filled from the bottom up, as the level of liquid rises. When the diluted alcohol reaches the selected secondary electrode 32, the filling of alcohol is interrupted by means of the solenoid valves 2, 2' and the filling with water begins until the final
10 secondary electrode 32' is reached which marks the final volume V_f .

 As the level of water rises, the different secondary electrodes 32 are also placed into contact with the main electrode 31 (the deepest one). Information is thus obtained of the different levels which the water reaches
15 during the rise thereof in the volumetric chamber 3.

 The arrangement of the principal 31 and secondary 32 electrodes allows a beverage to be obtained with as many different graduations as numbers of secondary electrodes 32 installed. For example, from a minimum
20 of 20 % to the maximum of 40 %.

 In other preferred embodiments, the volumetric chamber 3 can be connected to a flowmeter or any flow measuring device.

25 In the case of the flowmeter, this is a device which generates a determined number of pulses (counts) as a function of the quantity of milliliters of liquid which pass through a tube in one second, for example a lap counter of a vane, the rotation speed of which is a function of the speed of the liquid which passes by.

30

 Using said flowmeter, as it is also connected to the control unit 7, and

by means of software, these pulses are converted into milliliters per second to determine the volume of the liquid served.

5 The capsule holder 5 incorporates an indicator, which communicates the presence or absence of capsules to the control unit 7, thus avoiding incorrect operation.

10 The monodose capsule located in the capsule holder 5 can have a frangible wall (for example made of aluminum foil) which is passed through by one or more injection or extraction needles of the liquid (not depicted in the drawings). Preferably, the extraction needle will not perforate the capsule until consumer gives the command, whether using a button or using a lever actuatable by the glass or final receptacle.

15 As a security measure, the infuser for alcoholic beverages of the invention will have a locking mode, for example with a password in order to avoid an unauthorized person (a minor, for example) accessing the preparation of beverages or the alcohol tank 1. To this end, the infuser for alcoholic beverages of the invention comprises a locking means, for example
20 an electronic locking means.

25 The alcohol tank 1 and the water tank 1' of the preferred embodiment have automatic shut-off valves, actuated by springs which only allow the passage of liquid when they are placed in the operative position and they close by themselves when the alcohol tank 1 and the water tank 1' are disassembled for the cleaning or maintenance thereof. Similarly, they have level sensors to warn of the absence of sufficient alcohol or water. An example of level sensors would be infrared means which utilize the refraction of the beam to know whether or not there is liquid at the desired level.

30

In order to reduce the required functions of the pump 4 or even

dispense with it, the volumetric chamber 3 can be installed at a level above the capsule holder 5.

5 In order to ensure the operation thereof, the infuser for alcoholic beverages of the present invention incorporates an internal or external power source or alternatively a single-use or rechargeable battery.

10 Owing to the infuser for alcoholic beverages of the present invention, the industrial method for producing distilled alcoholic beverages such as gins, vodka, etc., may be reproduced and this possibility provided at both a domestic level and in the HORECA sector, that is to say, to instantly produce the alcoholic beverage which the client wants to consume, with the benefits of having produced it "instantly", taking into account that the ethanol (alcoholic base of these beverages), however well packaged it is, may lose
15 certain properties.

Therefore the infuser for alcoholic beverages of the present invention allows the industrial production phase of these types of alcoholic beverages to be reproduced in a domestic or HORECA device with reduced dimensions
20 and easy use, similar to a small domestic appliance such as for example a coffee maker, amongst others, as is schematically depicted in Figure 3, wherein the visible elements of the infuser for alcoholic beverages of the present invention are indicated.

25 The details, the forms, the dimensions and the other accessory elements as well as the materials used in the manufacture of the infuser for alcoholic beverages of the invention may be conveniently substituted by others which are technically equivalent and do not depart from the essentiality of the invention nor from the scope defined by the claims which
30 are included below.

CLAIMS

1. An infuser for alcoholic beverages which comprises an ethyl alcohol tank (1) and a water source which are hydraulically connected with a volumetric mixing chamber (3), a capsule holder (5) downstream of the volumetric chamber (3) for placement of monodose capsules of essences, and injection and extraction means of the liquid from the volumetric chamber (3) inside the capsule, characterized by the fact that the connection of the ethyl alcohol tank (1) and the water source with the volumetric chamber (3) is implemented by way of shut-off solenoid valves (2, 2'), and the volumetric chamber (3) comprising, in the interior thereof, a main electrode (31) and a plurality of secondary electrodes (32) arranged above the main electrode (31) at different levels.
2. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the shut-off solenoid valves (2, 2') are individual.
3. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the shut-off solenoid valves (2, 2') are in a single block.
4. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the shut-off solenoid valves (2, 2') are non-return valves hydraulically connected with the volumetric chamber (3).
5. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the injection and extraction means comprise a pump (4) with any type of drive and with electric actuation, hydraulically connected with the volumetric chamber (3), and a plurality of injection and extraction needles hydraulically connected with the volumetric chamber (3).
6. The infuser for alcoholic beverages according to claim 5, characterized

by the fact that the pump (4) is peristaltic.

7. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the water source comprises at least one water tank (1') or an outlet for the supply of water from the public drinking water system.

8. The infuser for alcoholic beverages according to claim 7, characterized by the fact that the ethyl alcohol tank (1) and/or the water tank (1') incorporate automatic shut-off valves.

10

9. The infuser for alcoholic beverages according to claim 7, characterized by the fact that the ethyl alcohol tank (1) and/or the water tank (1') incorporate level sensors.

10. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the capsule holder (5) comprises an indicator of the presence or absence of capsules.

11. The infuser for alcoholic beverages according to claim 1, characterized by the fact that it comprises a locking means.

12. The infuser for alcoholic beverages according to claim 11, characterized by the fact that the locking means is electronic.

13. The infuser for alcoholic beverages according to claim 1, characterized by the fact that the volumetric chamber (3) is connected to at least one flowmeter or any flow measuring device.

14. The infuser for alcoholic beverages according to claim 1, characterized by the fact that it incorporates an electronic control unit (7).

15. The infuser for alcoholic beverages according to claim 14, characterized by the fact that it incorporates a communication interface (9) for the user to communicate with the control unit (7).

5 16. The infuser for alcoholic beverages according to claim 15, characterized by the fact that the interface (9) comprises a touch screen or wireless means (8).

10 17. The infuser for alcoholic beverages according to claim 1, characterized by the fact that it incorporates an internal or external power source.

18. The infuser for alcoholic beverages according to claim 1, characterized by the fact that it incorporates a single-use or rechargeable battery.

ABSTRACT

Infuser for alcoholic beverages which comprises an ethyl alcohol tank
5 and a water source which are hydraulically connected with a volumetric
mixing chamber, a capsule holder downstream of the volumetric chamber for
placement of monodose capsules of essences and injection and extraction
means of the liquid from the volumetric chamber inside the capsule, wherein
the connection of the ethyl alcohol tank and the water source with the
10 volumetric chamber is implemented by way of shut-off solenoid valves, and
the volumetric chamber comprising, in the interior thereof, a main electrode
and a plurality of secondary electrodes arranged above the main electrode at
different levels.

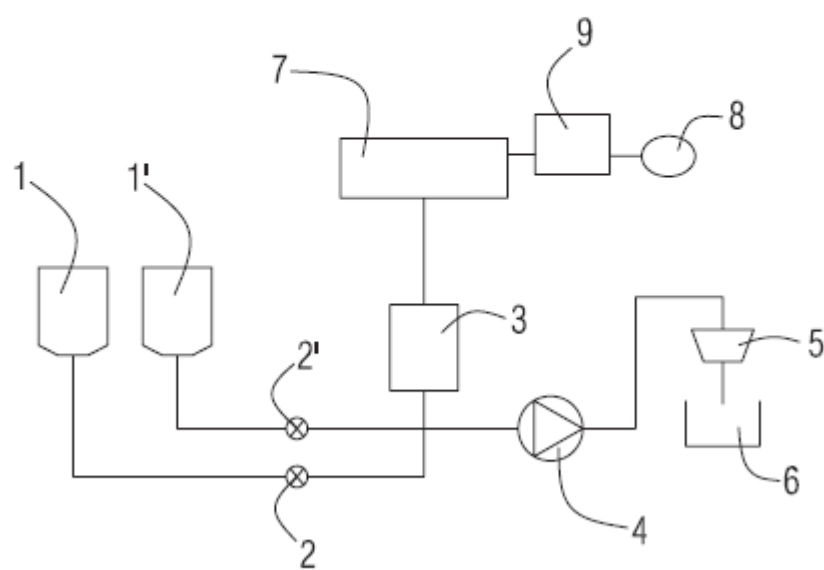
FIG. 1

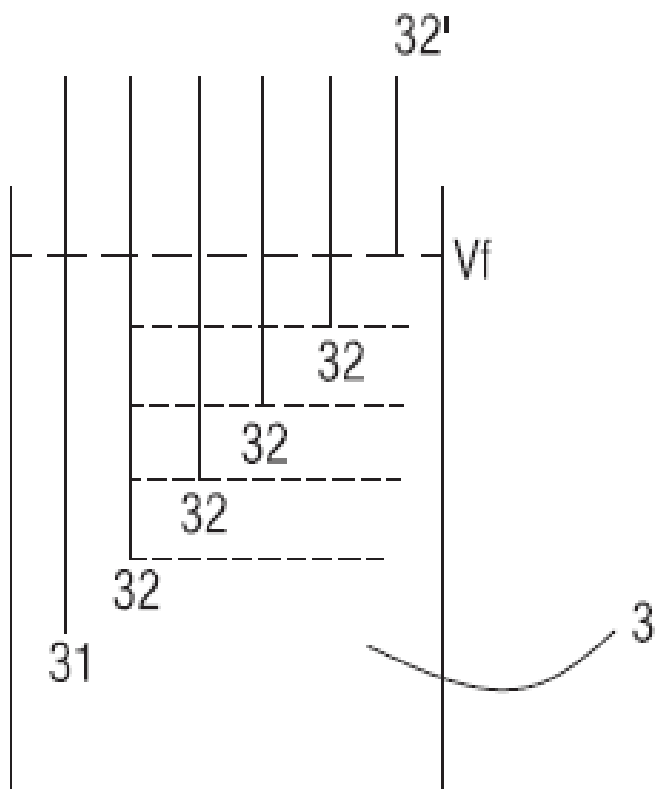
FIG. 2

FIG.3