




- (51) International Patent Classification:
E21B 19/16 (2006.01) *E21B 17/02* (2006.01)
E21B 33/124 (2006.01)
- (21) International Application Number: PCT/US2012/047125
- (22) International Filing Date: 18 July 2012 (18.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES INC.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SCOTT, Keith, Wayne** [US/US]; 13269 County Road 483, Lavon, TX 75166 (US). **HENDERSON, William, David** [US/US]; 1207 Vaughan Lane, Tioga, TX 76271 (US). **SCHAFER, Douglas, Allen** [US/US]; 1278 Monterrey Blvd, Euless, TX 76040 (US).
- (74) Agent: **YOUST, Lawrence, R.**; Lawrence Youst PLLC, One Waterway Court, Suite 3B, The Woodlands, TX 77380 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: RECLOSABLE MULTI ZONE ISOLATION TOOL AND METHOD FOR USE THEREOF

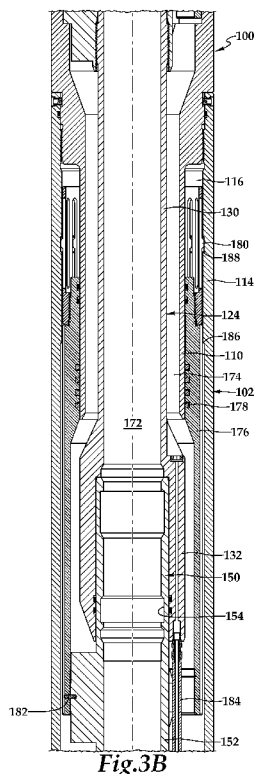

(57) Abstract: An apparatus for isolating a first zone from a second zone in a subterranean wellbore. The apparatus includes an outer tubular and an inner tubular disposed within the outer tubular forming an annular flow path therebetween that is in fluid communication with the first zone. The inner tubular defines a central flow path that is in fluid communication with the second zone. A sleeve having at least one seal is positioned in the annular flow path and is axially movable relative to the inner and outer tubulars between a closed position wherein the seal engages the inner tubular and an open position wherein the seal engages the outer tubular. A mandrel is slidably disposed within the inner tubular and is coupled to the sleeve. The mandrel is operable to shift the sleeve between the open position and the closed position responsive to changes in pressure within the central flow path.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*