



(43) International Publication Date
27 February 2014 (27.02.2014)

- (51) International Patent Classification:
E05F 15/14 (2006.01)
- (21) International Application Number:
PCT/IL2013/050727
- (22) International Filing Date:
20 August 2013 (20.08.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/589,873 20 August 2012 (20.08.2012) US
- (71) Applicant: **NEW VISION YEZIROT ALUMINUM LTD.** [IL/—]; 6 Harimon St., 405000 Even Yehuda (IL).
- (72) Inventors: **VAKNIN, Oren**; 13 Derech HaPark, 42323 Netanya (IL). **RODAN, Yoav**; Lavon, D. n, 20118 Bikat Beit Hakerem (IL). **SILNE, Giora**; 7 Shvil Tishrey St., 2196337 Karmiel (IL).
- (74) Agent: **APPELFELD ILANIT (2013) LAW FIRM**; P.O.B 18253, 61182 Tel Aviv (IL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: KIT FOR MOTORIZED CLOSURE ASSEMBLY

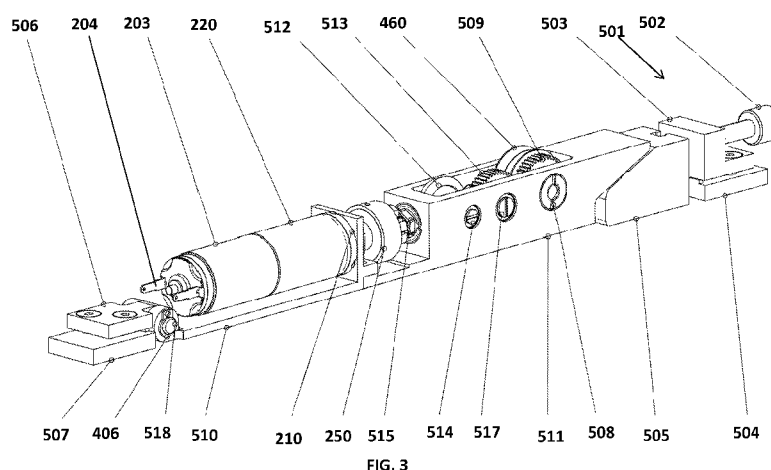

(57) Abstract: The disclosure is directed to motorized closure assembly, comprising: an opening frame configured to fit around the opening; a substantially rectangular closure slab having a closure slab frame configured to surround the substantially rectangular closure slab and sealingly fit within the opening frame; and a motorized driver, wherein the motorized driver is entirely embedded within the closure slab frame or within a combination of the closure slab frame and the opening frame, the motorized driver configured to slidably move the slab between an open position and a closed position.