



(51) International Patent Classification:
F16L 47/03 (2006.01) *B29C 65/34* (2006.01)

(21) International Application Number:
PCT/FI2011/050909

(22) International Filing Date:
19 October 2011 (19.10.2011)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20106144 1 November 2010 (01.11.2010) FI

(71) Applicant (for all designated States except US): **MARI-CAP OY** [FI/FI]; Pohjantähdentie 17, FI-01450 Vantaa (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FI-04310 Tuusula (FI).

(74) Agent: **HEINÄNEN OY**; Äyritie 8 D, FI-01510 Vantaa (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: SLEEVE PART OF A PIPE JOINT AND A PIPE JOINT

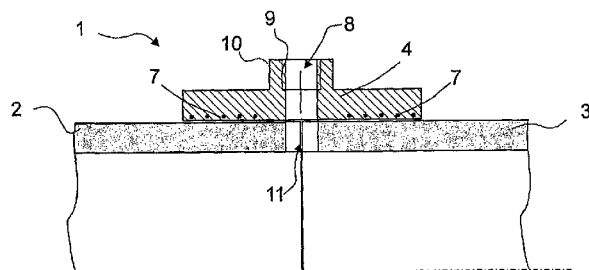


FIG. 3

(57) Abstract: Sleeve part of a pipe joint (1), which sleeve part comprises a chamber space, into which the opposing butt ends (5, 6) of the pipe parts (2, 3) to be connected together are placed such that the sleeve part (4) extends a distance from the point of connection of the pipe parts (2, 3) to be connected together on top of both pipe parts (2, 3), which sleeve part (4) comprises heating means (7), such as resistance wires, as a consequence of the heating of which resistance wires a joint forms between the sleeve part (4) and the pipe parts (2, 3). An inspection aperture (8) is formed in the sleeve part (4) through the wall of the sleeve part from the exterior to a point where the positioning of the opposing butt end surfaces (5, 6) of the pipe parts (2, 3) to be connected together can be verified. The invention also relates to a pipe joint.