

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/104458 A1

(51) International Patent Classification:
E01F 13/08 (2006.01) *E01F 13/12* (2006.01)

(21) International Application Number:
PCT/SG2005/000100

(22) International Filing Date: 28 March 2005 (28.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **PRECISION FABRICATORS (S) PTE LTD** [SG/SG]; 12 Penjuru Close, Singapore 608615 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CHUN, Thong, Ping** [SG/SG]; 12 Penjuru Close, Singapore 608615 (SG).

(74) Agent: **ELLA CHEONG SPRUSON & FERGUSON (SINGAPORE)**; P.O. Box 1531, Robison Road Post Office, Singapore 903031 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VEHICLE BARRIER

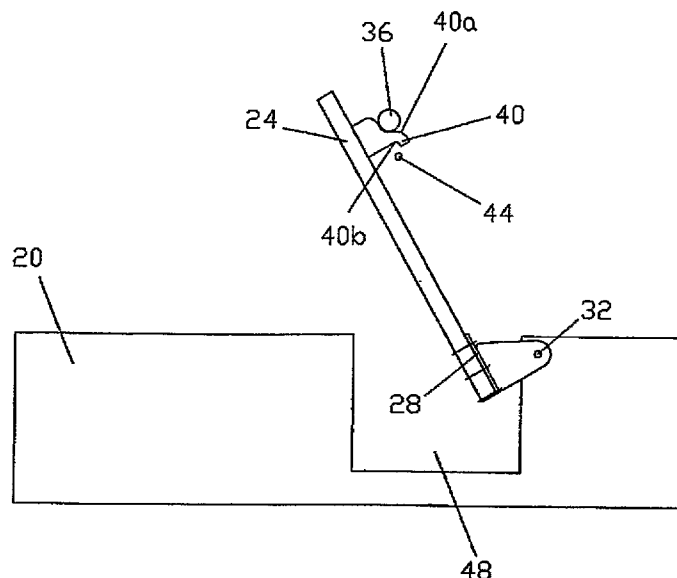

(57) Abstract: A vehicle barrier is provided. The vehicle barrier (10) comprises a base element (20), a barrier element (24) and a guiding element (28). The guiding element (28) connects the barrier element (24) to the base element (20). Upon an impact on the barrier element (24), the guiding element (28) permits the barrier element (24) to move down towards the base element (20). In one embodiment, the downward movement is provided by a cam surface (40a) acting on a stopper (44) in cooperation with the guiding element (28). In another embodiment, the guiding element is mounted on a pivot and an additional cam surface (40b) engages an additional stopper (44) to locate the barrier element (24) to the base element (20). In another embodiment, the vehicle barrier (10) is mounted on a trailer.

WO 2006/104458 A1