

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 August 2002 (22.08.2002)


PCT

(10) International Publication Number
WO 02/064449 A1

- (51) International Patent Classification⁷: **B65D 83/20** (74) Agent: **STEIDL, Daniel, H.**; Kilgannon & Steidl, 85 Pondfield Road, Bronxville, NY 10708 (US).
- (21) International Application Number: PCT/US02/05140
- (22) International Filing Date: 14 February 2002 (14.02.2002) (81) Designated States (*national*): AU, BR, CA, CN, IN, JP, KR, MX, RU, SG, UA, ZA.
- (25) Filing Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (26) Publication Language: English
- (30) Priority Data: 09/783,490 14 February 2001 (14.02.2001) US
Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (71) Applicant: **PRECISION VALVE CORPORATION** [US/US]; 700 Nepperhan Avenue, Yonkers, NY 10703 (US).
- (72) Inventor: **BAYER, Christian**; 19 Faraway Road, Armonk, NY 10504 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PREASSEMBLED AEROSOL ACTUATOR ASSEMBLY FOR IN-LINE CAPPING TO AN AEROSOL CONTAINER

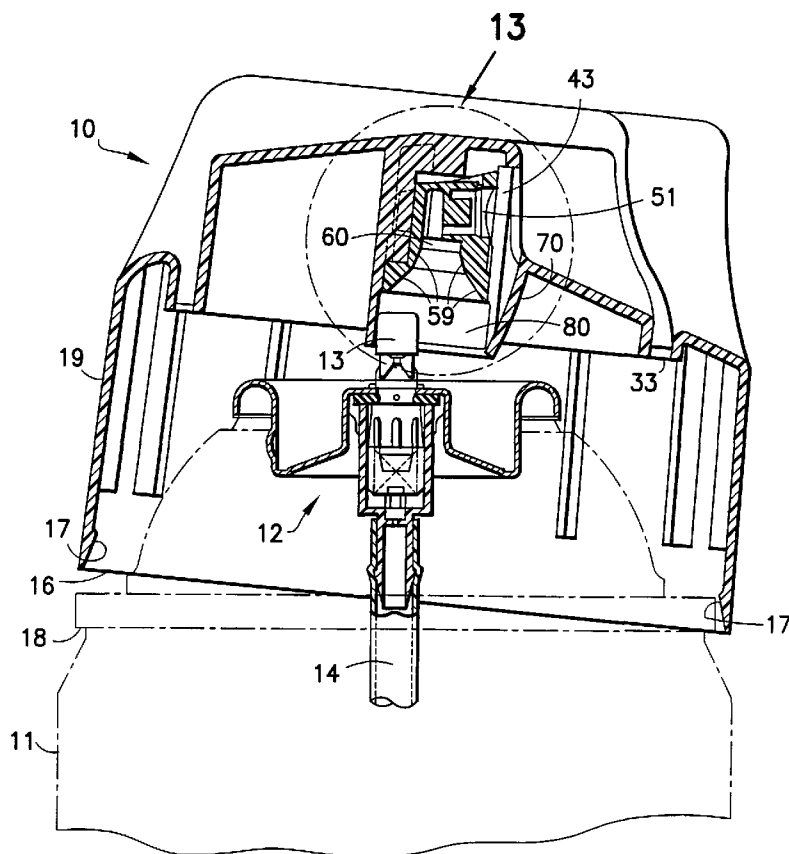

(57) Abstract: A preassembled aerosol actuator assembly (10) and a method of in-line capping the assembly to an aerosol container (11). A shell has a discrete spray button (50) reassembled into a cocket. The button has an upwardly extending interior passage (59) with a wide lead-in converging upwardly to terminate in a shallow valve stem-sealing socket (60). The bottom of the button has no obstructions and no unintended stem-capturing openings. The button socket (60) has a side spray slot (43) closed at the bottom by a radiused flap (70). Heat-dissipated interior channels are cored from the button top down into the button.



WO 02/064449 A1