



(43) International Publication Date
12 November 2015 (12.11.2015)

(51) International Patent Classification:

A63G 1/12 (2006.01) A63G 1/40 (2006.01)
A63B 22/18 (2006.01)

(21) International Application Number:

PCT/EP2015/059705

(22) International Filing Date:

4 May 2015 (04.05.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14167118.0 6 May 2014 (06.05.2014) EP

(71) Applicant: **KOMPAN A/S** [DK/DK]; C.F. Tietgens
Boulevard 32 C, 5220 Odense SØ (DK).

(72) Inventor: **BENTSEN, Nikolaj Maj**; Strandgaardsvej 2,
DK-7120 Vejle Ø (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: A PLAYGROUND EQUIPMENT

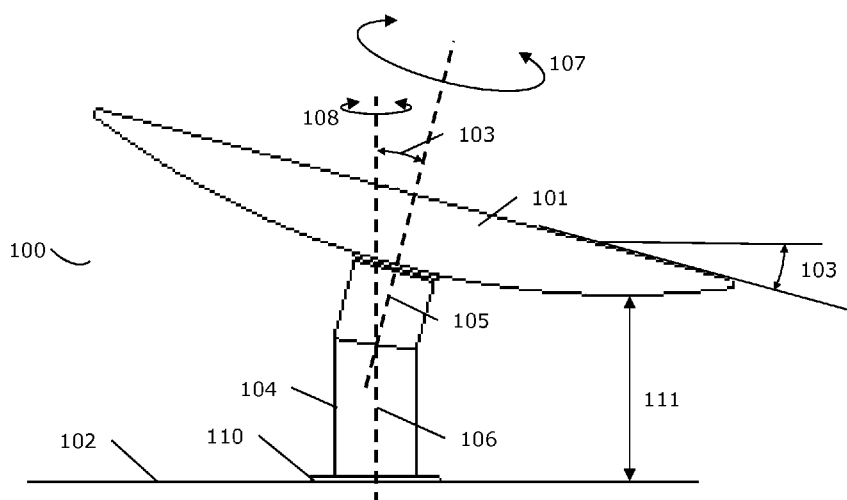


Fig. 1

(57) Abstract: The invention relates to a playground equipment comprising a platform for a user to sit or stand on and mounted to the ground via a first shaft and a second shaft. The shafts are connected to each other at an angle and coupled in a gear transmission system. Because of the gearing between the shafts a first rotational speed of the first shaft yields a second rotational speed of the second shaft different from the first rotational speed. The gear transmission system may comprise an epicyclic gear train such as a planetary gear system. The gear transmission system may yield a gear ratio in the range of 1.5-10 such as in the range of 3-7.

