



9805209-5



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16L 3/10	A1	(11) International Publication Number: WO 97/37164 (43) International Publication Date: 9 October 1997 (09.10.97)
(21) International Application Number: PCT/NO97/00084 ✓ (22) International Filing Date: 25 March 1997 (25.03.97) ✓ (30) Priority Data: 961327 1 April 1996 (01.04.96) ✓ NO (71)(72) Applicant and Inventor: ELVEGAARD, Eilif (NO/NO); Sigrid Undsets vei 32, N-1600 Fredrikstad (NO). (74) Agent: TANDBERGS PATENTKONTOR A/S; Boks 7085, N- 0306 Oslo (NO).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Norwegian).</i>	

(54) Title: A CLAMPING DEVICE FOR CLAMPING OF TUBES OR THE LIKE

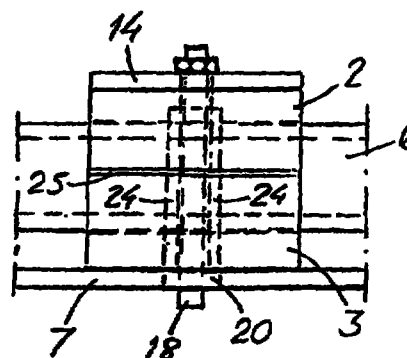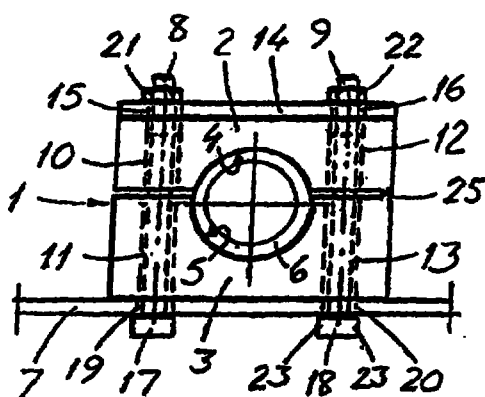

(57) Abstract

A clamp device for clamping of at least one tube or the like to a support, comprising a base member (1) having at least one recess (4, 5) for receiving the tube (6) or the like, possibly a top plate (14) at the side of the base member facing away from the support (7), and at least one locking screw (8 resp. 9) carried through mutually aligned holes (15, 10, 11 resp. 16, 12, 13) in the top plate and the base member. The locking screw has a head (17 resp. 18) at one end and a nut (21 resp. 22) at the other end, for keeping the components of the clamp device together as an assembled unit without any loose parts, the head (17 resp. 18) of the screw being arranged to be carried through an elongated hole (19 resp. 20) in the support and locked thereto by tightening of the nut. The base member consists of two halves (2, 3) of which at least one half (3) has at least one recess (5) for clamping receipt of the tube or tubes (6), and the hole or holes (10, 11, 12, 13) through the halves (2, 3) has/have a radial enlargement (24) along a part of its length, so that the head of the associated locking screw can pass into the half (3) nearest to the support (7) or through this half and partly into the other half (2), to allow a limited relative movement of the halves and allow lateral introduction of a tube (6) into the recesses (4, 5).