

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
11 November 2021 (11.11.2021)



(10) International Publication Number
WO 2021/223869 A1

(51) International Patent Classification:
E01F 15/08 (2006.01)

(21) International Application Number:
PCT/EP2020/062776

(22) International Filing Date:
07 May 2020 (07.05.2020)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **WORXSAFE AB** [SE/SE]; Nifsåsvägen 9, 831 52 Östersund (SE).

(72) Inventor: **JOHANSSON, Pär**; Skolgatan 58, 831 46 Östersund (SE).

(74) Agent: **AWA SWEDEN AB**; Box 665, 831 27 Östersund (SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A SAFETY BARRIER

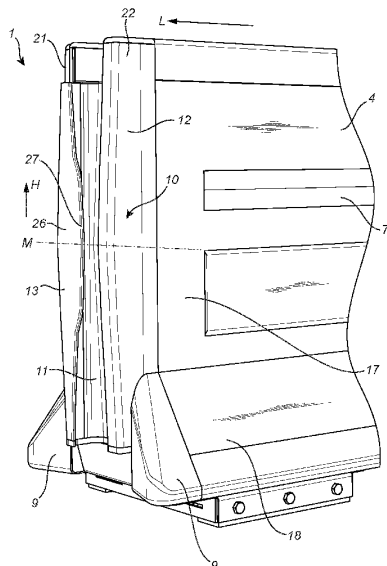


Fig. 4

(57) Abstract: A safety barrier (1) is provided. The barrier (1) has a length (L), a width (W), and a height (H). The barrier (1) has an end connection (10) at an end of the safety barrier, which end connection is arranged to be connected with a corresponding end connection of another safety barrier. The end connection comprises a receiving space (11) adapted to receive at least a portion of an end connection of another safety barrier, and to only enable connection and disconnection with said corresponding end connection of another safety barrier by movement of the safety barriers relative to each other in direction of the height of the safety barrier. A distance through the receiving space between wall surfaces of the receiving space in the direction of the length of the safety barrier is at a minimum between upper and lower ends of the end connection and is greater at the ends.

WO 2021/223869 A1