



(51) International Patent Classification:
A61L 9/12 (2006.01)

(21) International Application Number:
PCT/GB2011/001337

(22) International Filing Date:
12 September 2011 (12.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1015168.6 10 September 2010 (10.09.2010) GB

(71) Applicant (for all designated States except US): **I&I DEVELOPEMENTS LTD** [GB/GB]; Washington House, PO Box 112, Reigate, Surrey RH2 9FT (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SLADE, Brian Parry** [GB/GB]; 20 Star Road, Ashford, Kent TN24 8BX (GB).

(74) Agent: **OXLEY, Robin John George**; Marks & Clerk LLP, 90 Long Acre, London WC2E 9RA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VOLATILE MATERIAL DISPENSER AND DISPENSING SCREEN THEREFOR

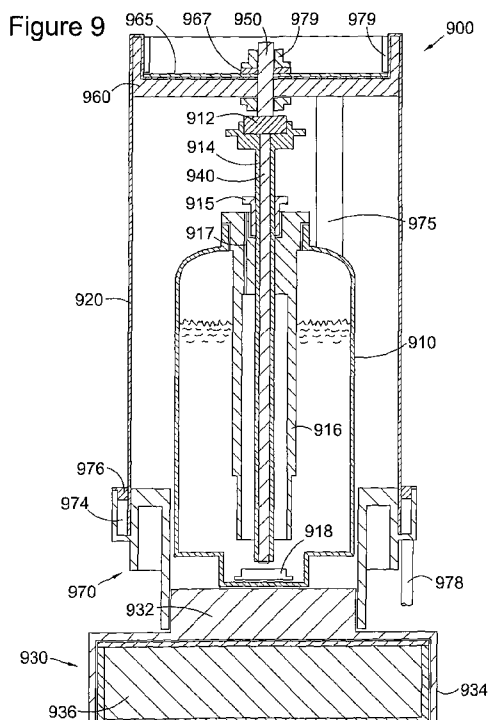

(57) Abstract: A dispensing screen for dispensing, by evaporation, volatile materials applied thereto, is provided. The screen comprises a sheet of material and diverting means formed in the plane of the sheet. The diverting means form a minimum path length along the length of the sheet between at least a portion of a first edge and an opposing second edge of the sheet, which minimum path length is longer than the distance between the first and second edges along the surface of the sheet. A dispensing apparatus is also provided, which in embodiments includes the dispensing screen of the invention, and in embodiments includes a sink for capturing un-evaporated volatile material.