



(51) International Patent Classification:

B65H 51/02 (2006.01) **B29C 47/06** (2006.01)
B65H 55/00 (2006.01) **B29C 47/08** (2006.01)
B65H 75/28 (2006.01)

(21) International Application Number:

PCT/SG2013/000419

(22) International Filing Date:

26 September 2013 (26.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201207174-2 26 September 2012 (26.09.2012) SG

(71) Applicant: **PIRATE3DP PTE LTD** [SG/SG]; 2a, Pahang Street, Singapore 198604 (SG).

(72) Inventors: **TSANG, You Jun**; 250 Lorong Chuan, #02-06 Chuan Park, Singapore 556748 (SG). **CHANG, Wai Kit Roger**; c/o 89 Short Street, #10-07 Golden Wall Centre, Singapore 188216 (SG). **GOH, Kheng Leng Brendan**; 5 Palm Avenue, Singapore 456526 (SG). **NEO, Kok Beng**;

229 Loyang Rise, Singapore 507372 (SG). **DHAKAR, Lokesh**; 36, College Avenue East, #21-201B University Town Residence, University Town, Singapore 138600 (SG).

(74) Agent: **YUSARN AUDREY**; 24 Raffles Place, #27-01 Clifford Centre, Singapore 048621 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) Title: COMPONENTS FOR USE IN THREE DIMENSIONAL FABRICATORS

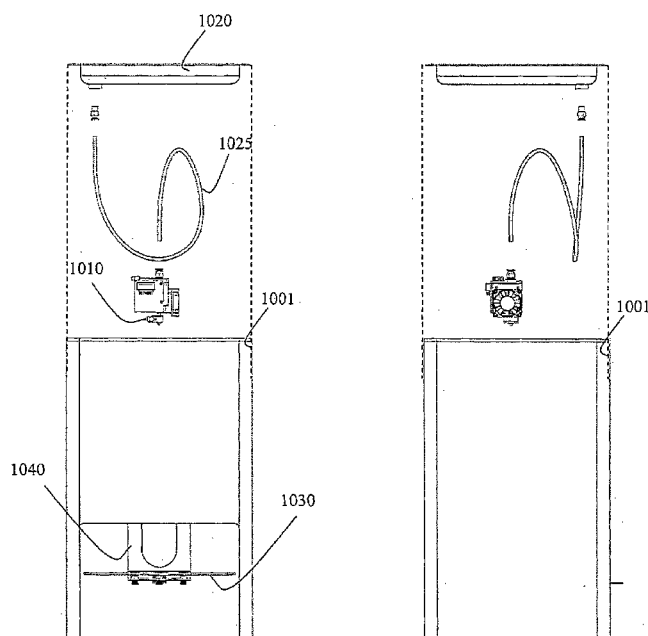


FIG. 10

(57) Abstract: There is a filament dispenser and a support structure for use in three dimensional fabricators. The filament dispenser is top-loaded and comprises a container which may be rotatable relative to a filament dock, such relative rotation effectively preventing entanglement of the filament material when in operation. There is also a support structure for use in three dimensional fabricators, such support structure comprising a mounting plate for an extruder to be attached thereon and a tongue portion slidable relative to the extruder.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*