

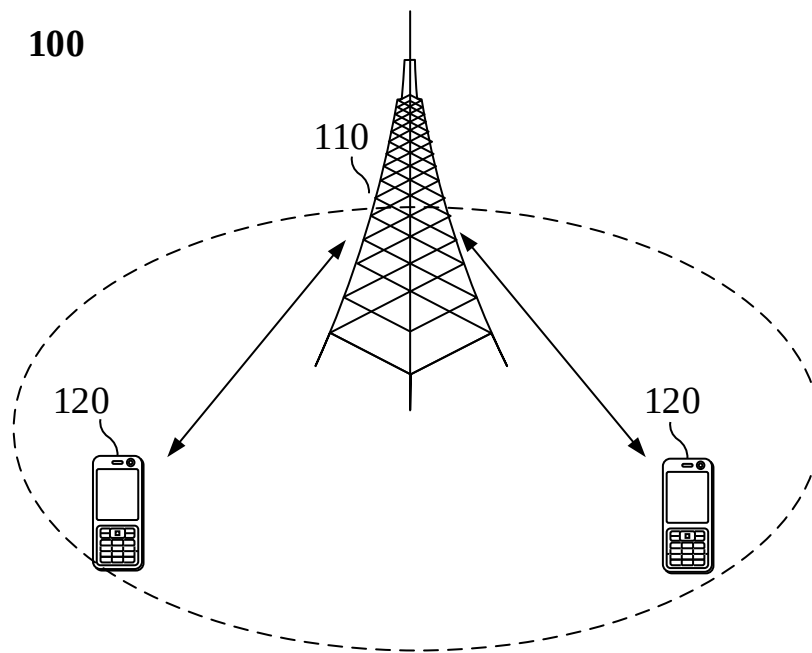


FIG. 1

A terminal device receives first search space configuration information and second search space configuration information from a network device

201

The terminal device determines based on a first timer and/or first control information to perform downlink control channel monitoring based on the first search space configuration information or the second search space configuration information

202

FIG. 2

A network device sends first search space configuration information and second search space configuration information to a terminal device, the first search space configuration information and the second search space configuration information being configured for the terminal device to determine based on a first timer and/or first control information to perform downlink control channel monitoring based on the first search space configuration information or the second search space configuration information

301

FIG. 3

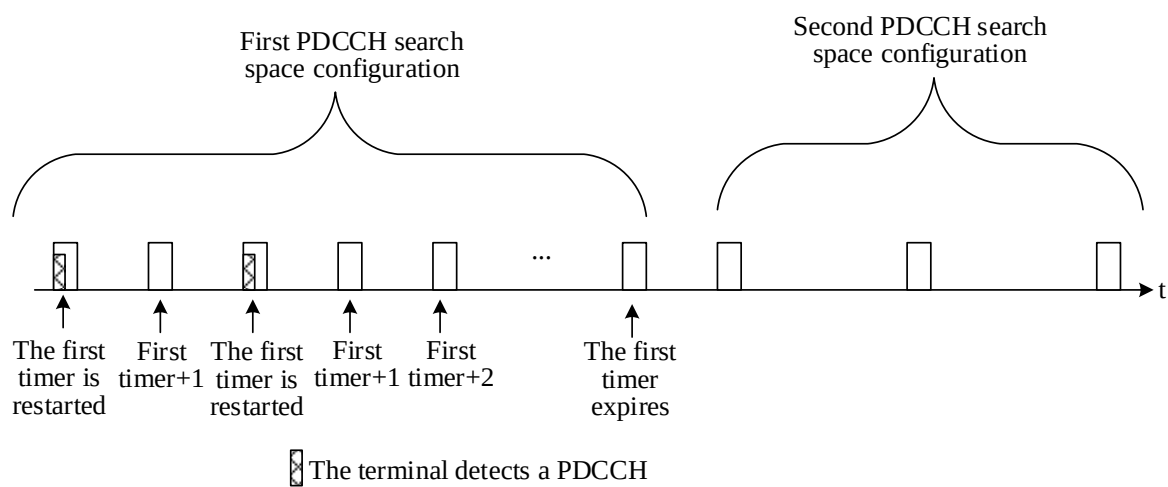


FIG. 4

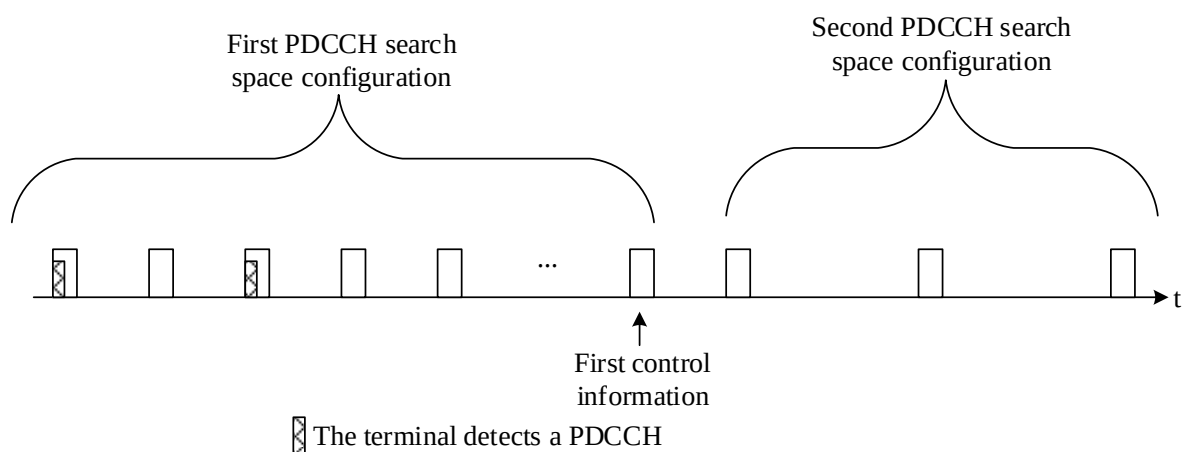


FIG. 5

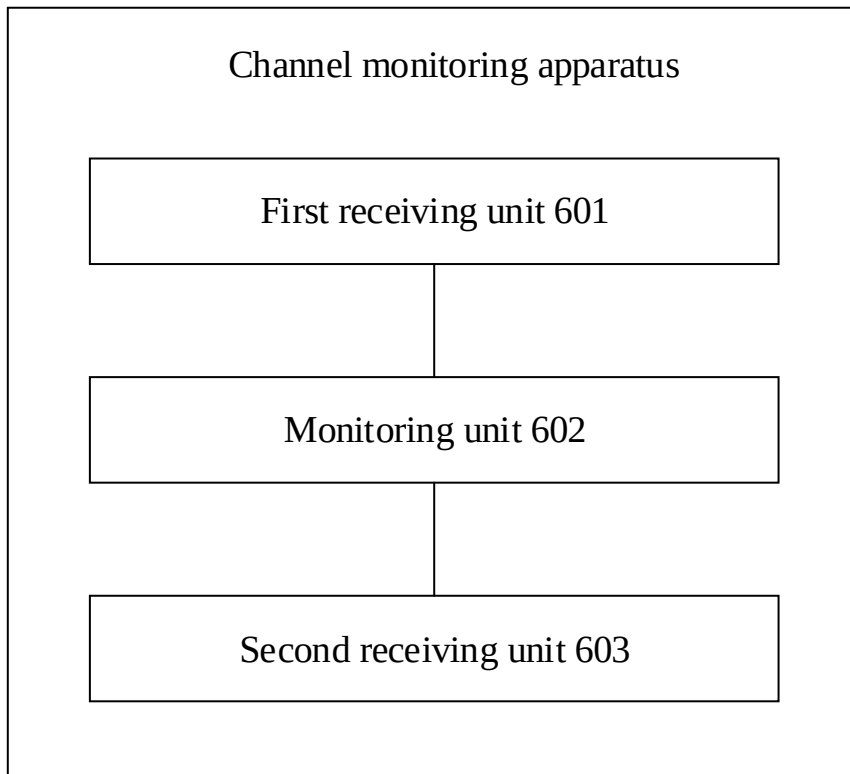


FIG. 6

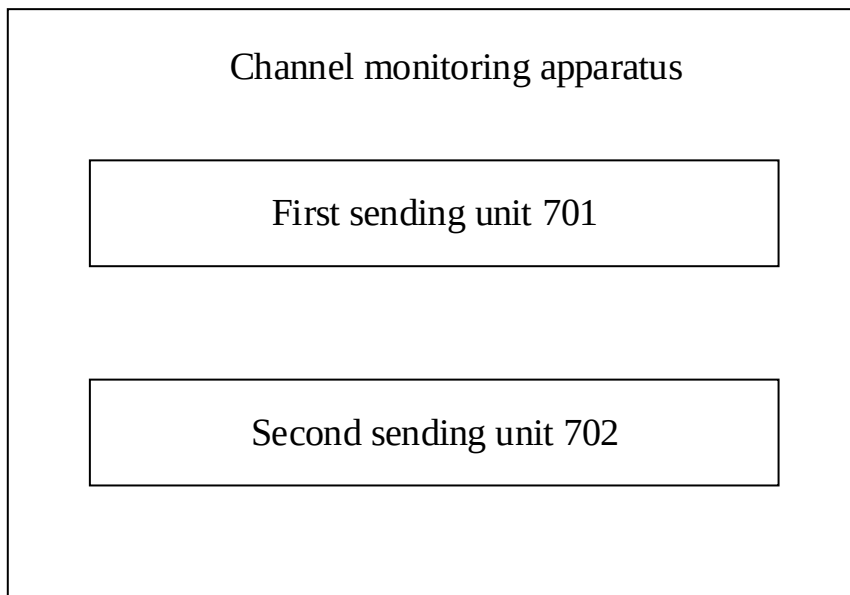


FIG. 7

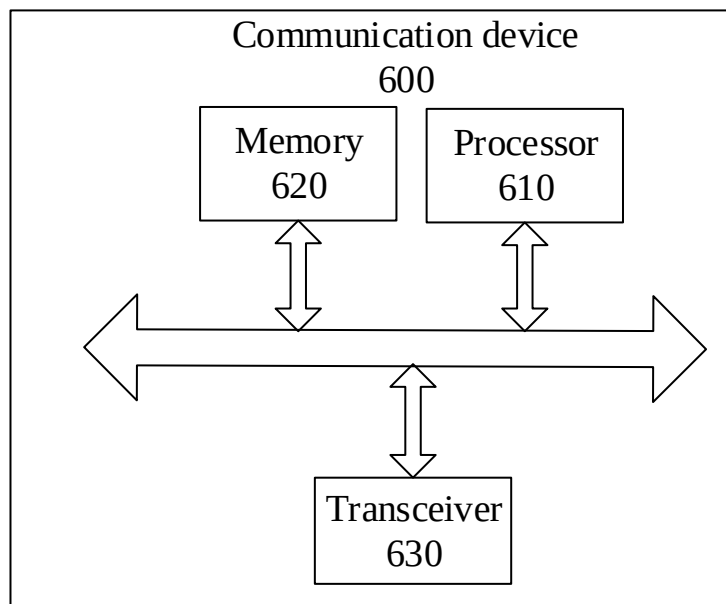


FIG. 8

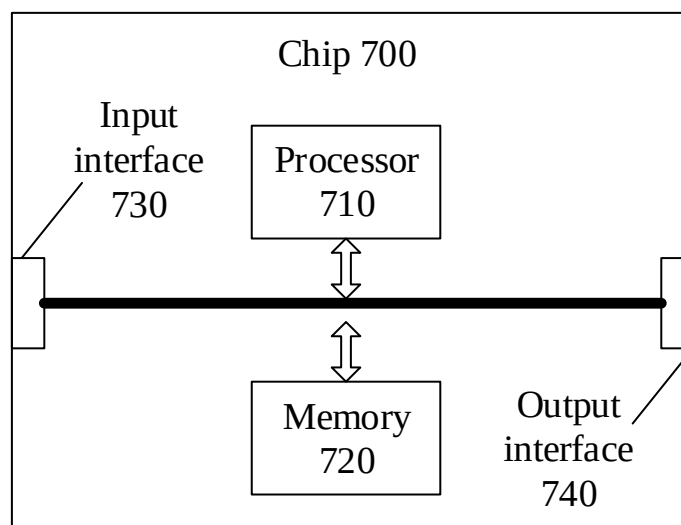


FIG. 9

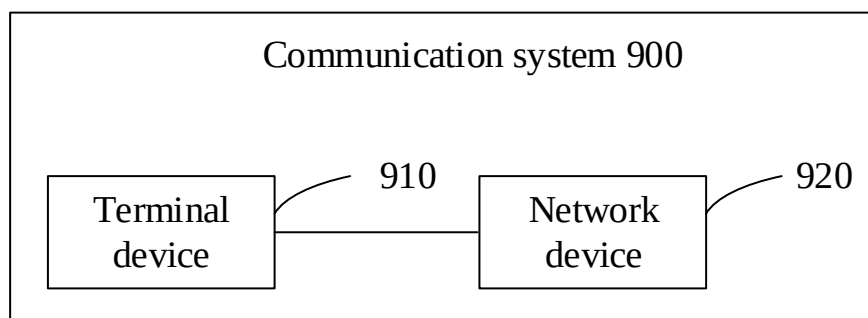


FIG. 10