


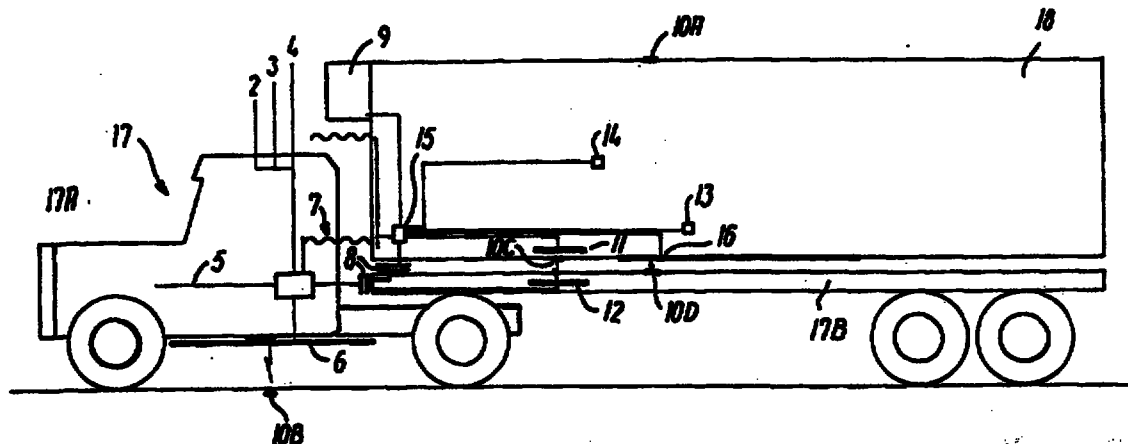

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: G08G 1/27, G08B 25/10	A1	(11) International Publication Number: WO 96/16387 (43) International Publication Date: 30 May 1996 (30.05.96)
(21) International Application Number: PCT/DK95/00460 (22) International Filing Date: 21 November 1995 (21.11.95) (30) Priority Data: 1332/94 22 November 1994 (22.11.94) ✓DK (71)(72) Applicants and Inventors: PEDERSEN, Heine, E. [DK/DK]; Sydskråningen 1, DK-2800 Lyngby (DK). HARDER, John [DK/DK]; Viborggade 8, st. th., DK-2100 Copenhagen Ø (DK). LOHMANN-JENSEN, Flemming [DK/DK]; Jensløvs Tværvæg 13, 3.th., DK-2920 Charlottenlund (DK). (74) Agent: HOFMAN-BANG & BOUTARD A/S; Adelgade 15, DK-1304 Copenhagen K (DK).		(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published <i>With international search report.</i>

(54) Title: A TRAFFIC SUPERVISION SYSTEM FOR VEHICLES**(57) Abstract**

To protect and watch transport units consisting of a towing unit and one or more transported or transporting units, the towing unit has a data processing system (1) capable of communicating with the outside world via communications and GPS satellites (45) and/or a GSM system (39) and with tags (10B) buried in a road. The transporting or transported unit or units additionally have a data processing system (15) capable of communicating with a data processing system (1) in the towing unit via a wireless interface (7) or interface (8). The data processing system in the transporting or transported unit or units is moreover interfaced with an aerial (16) capable of communicating with tags in a road or surfaces (10B) or tags (10A) located in the top of transporting or transported units. A system designed as described above provides the advantage that a cargo or a transport unit can always be positioned and watched.