

(19) World Intellectual Property Organization
International Bureau



G00002



(43) International Publication Date
1 August 2002 (01.08.2002)

PCT

(10) International Publication Number
WO 02/060092 A1

(51) International Patent Classification⁷: **H04B 7/06**

(21) International Application Number: PCT/US02/01801

(22) International Filing Date: 17 January 2002 (17.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/771,137 24 January 2001 (24.01.2001) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).

(72) Inventor: **JUDSON, Bruce, A.**; 66 Highland Drive, San
Luis Obispo, CA 93405 (US).

(74) Agents: **WADSWORTH, Philip, R.** et al.; Qualcomm In-
corporated, 5775 Morehouse Drive, San Diego, CA 92121-
1714 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,
ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent
(BI, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

Published:


- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR FORWARD LINK BEAM FORMING IN WIRELESS COMMUNICATIONS



162162

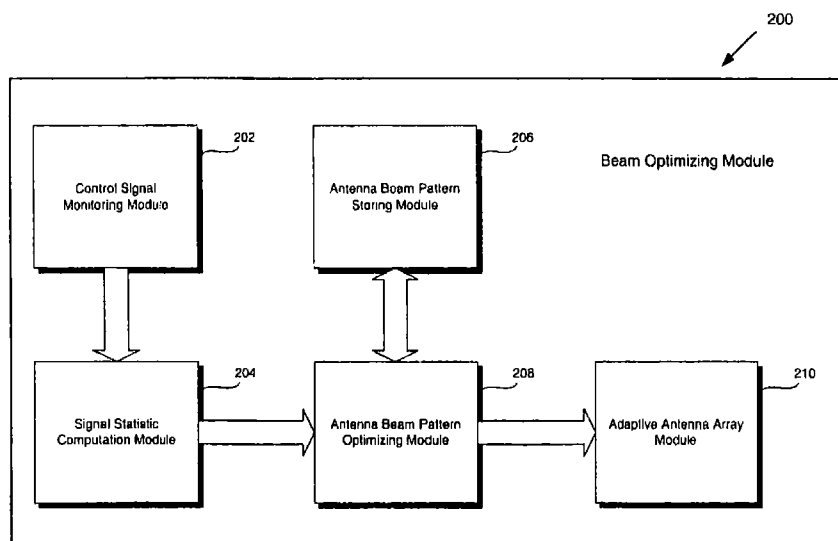

(57) Abstract: According to one embodiment, an antenna beam pattern is used to send a communication signal to a user. For example, the antenna beam pattern can be formed using adaptive antenna array technology on the forward link of a wireless communication system. A control signal from the user is used to determine a statistic. For example, the control can be a power control bit sent by the user on the return link. The statistic can be an average of the power control bit values over a specific time interval. The statistic is used to narrow the antenna beam pattern and direct it toward the user. For example, a dithering algorithm can be used to optimize the antenna beam pattern. After a call is completed, an optimized antenna beam pattern specific to each user can be stored for the next call to make the optimizing process faster and more efficient.

WO 02/060092 A1