

2002064806
1 OCT 2002

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 August 2002 (22.08.2002)


PCT

(10) International Publication Number
WO 02/065024 A1

- (51) International Patent Classification⁷: F24F 7/02, F04D 25/04, B60H 1/00
- (74) Agent: VLECK, Jan, Montagu; Reddie and Grose, 16 Theobalds Road, London WC1X 8PL (GB).
- (21) International Application Number: PCT/GB02/00689
- (22) International Filing Date: 15 February 2002 (15.02.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0103781.1 15 February 2001 (15.02.2001) GB
- (71) Applicant (for all designated States except US): FLETCHER VENTILATOR LIMITED [GB/GB]; 2 Basing Hill, London NW11 8TH (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HURLSTONE, Chris [GB/GB]; 5 Bury Water Lane, Newport, Essex CB11 3TZ (GB). DI CIOCCIO, Mark, Anthony [GB/GB]; Wayside Cottage, Church Road, Felsham, Suffolk IP30 0PJ (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: DEVICE FOR VENTILATION AND/OR AIR CIRCULATION

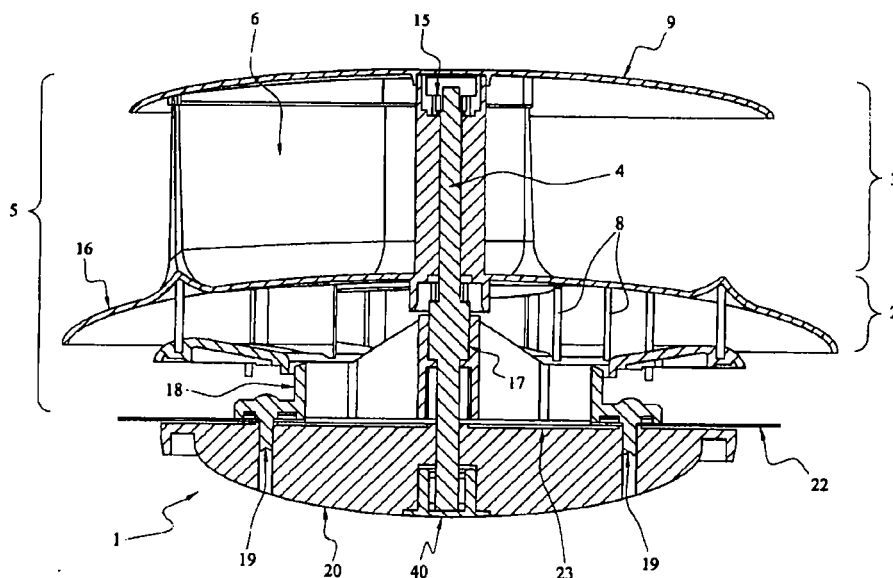

(57) Abstract: A device comprising a rotor (3) and fan (2) rotatably mounted on a shaft (4) which is rigidly fixed relative to a vehicle surface. The device is fixable on a vehicle surface by means of two clamping portions (18, 20) which are moveable towards each other along the shaft (4) to press against a surface between them.

WO 02/065024 A1



162162



ACTION