

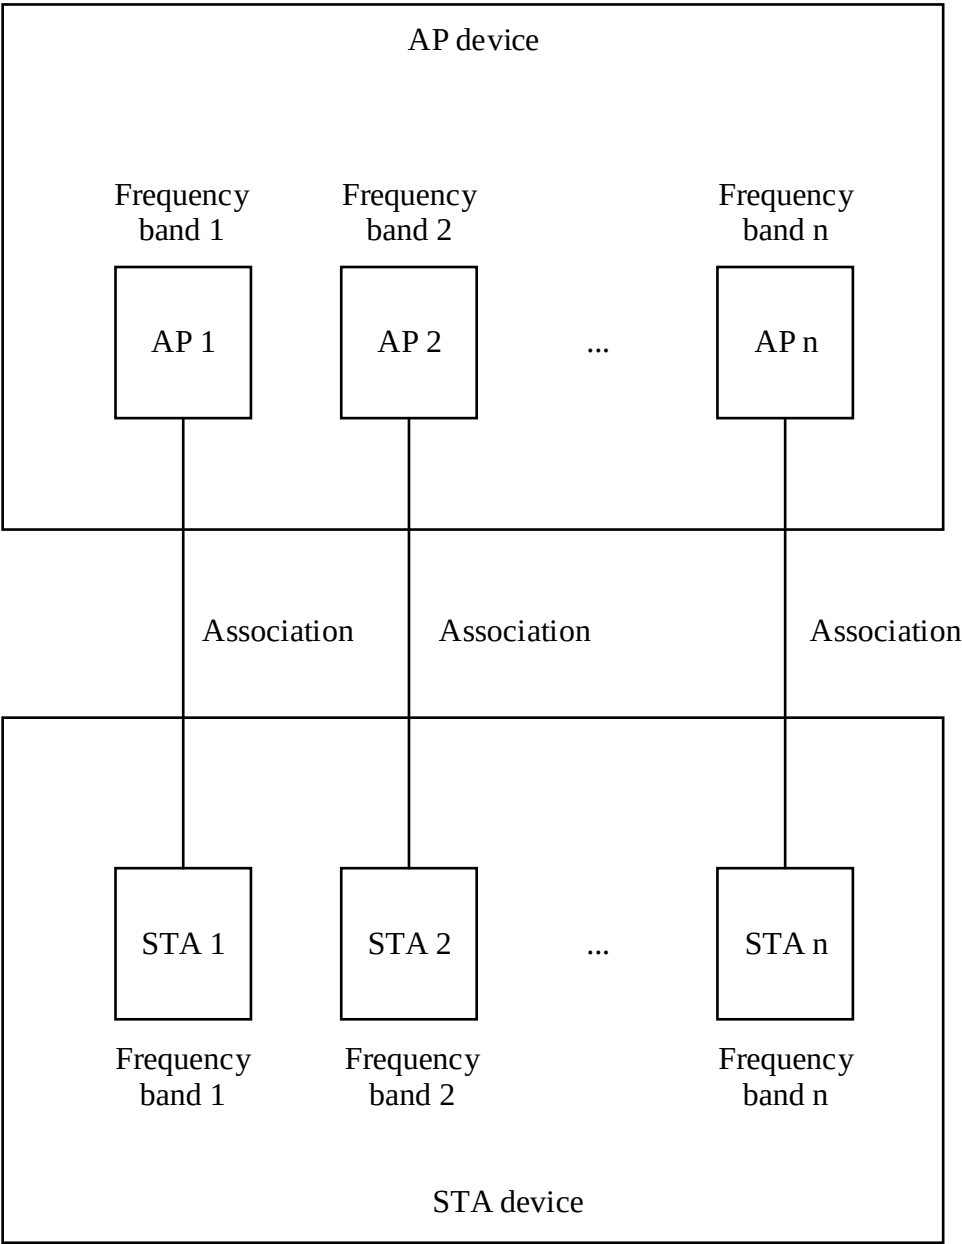


FIG. 1

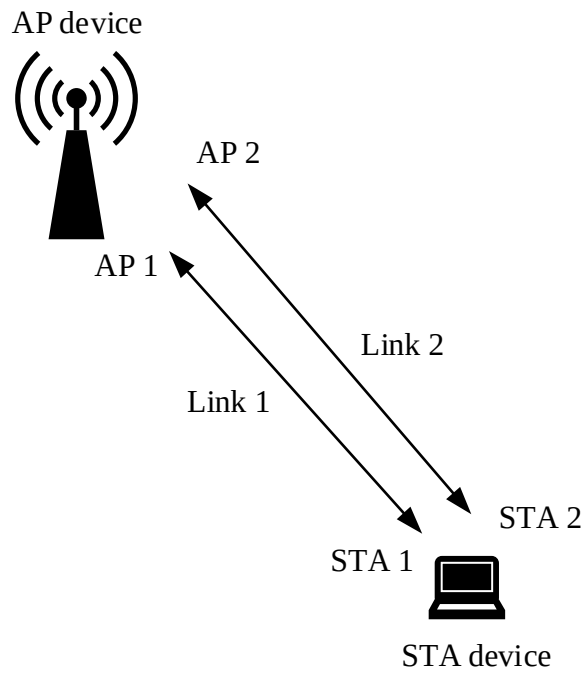


FIG. 2

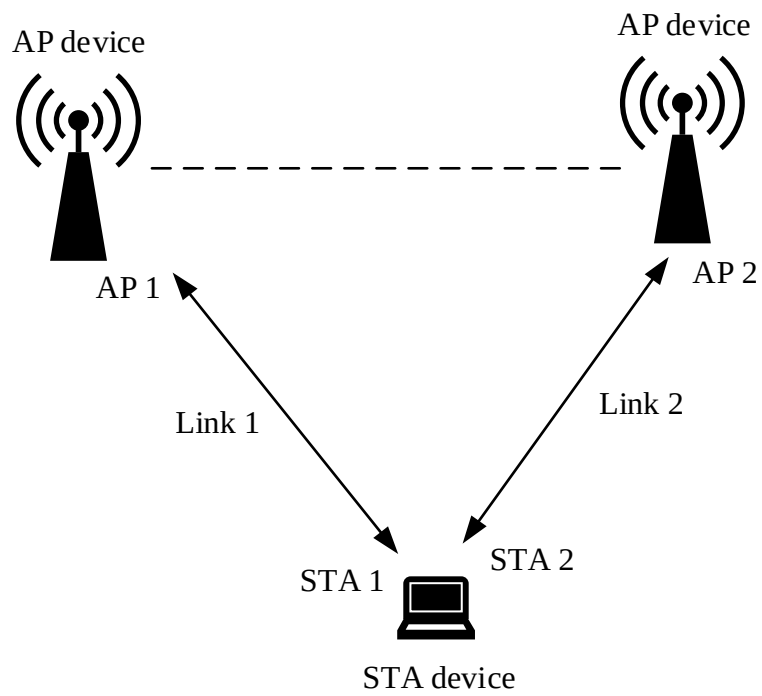


FIG. 3

In a process in which an AP device authenticates a STA device, the AP device sends a target packet to the STA device 401

FIG. 4

In a process in which two ML devices perform FST, one ML device sends an FST frame to the other ML device, where the FST frame includes a multi-band element 501

FIG. 5

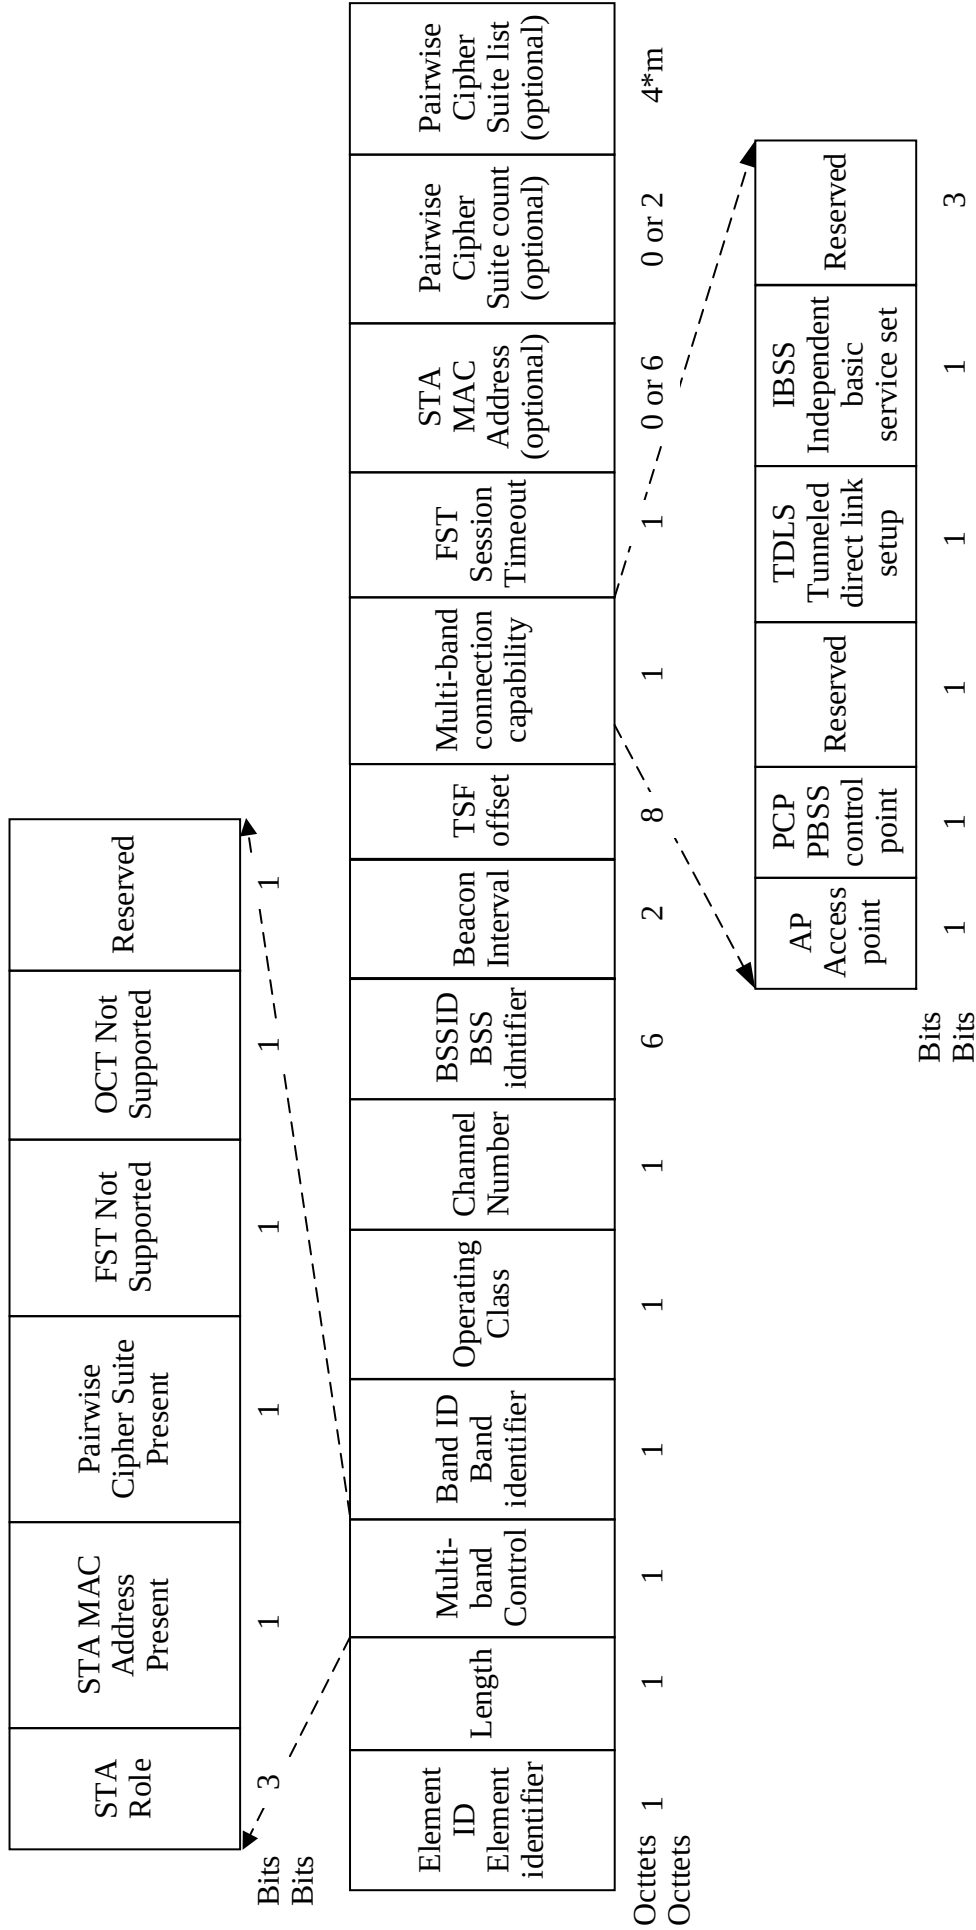


FIG. 6

In a process in which two devices perform packet-level multi-link aggregation, the two ML devices communicate with each other by using MAC addresses of their respective SAPs

701

FIG. 7

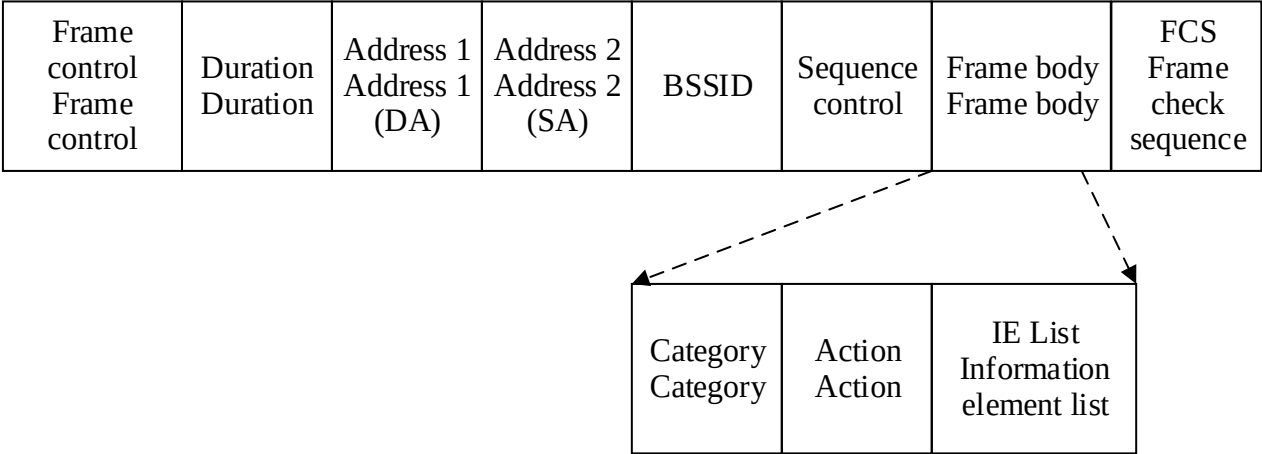


FIG. 8

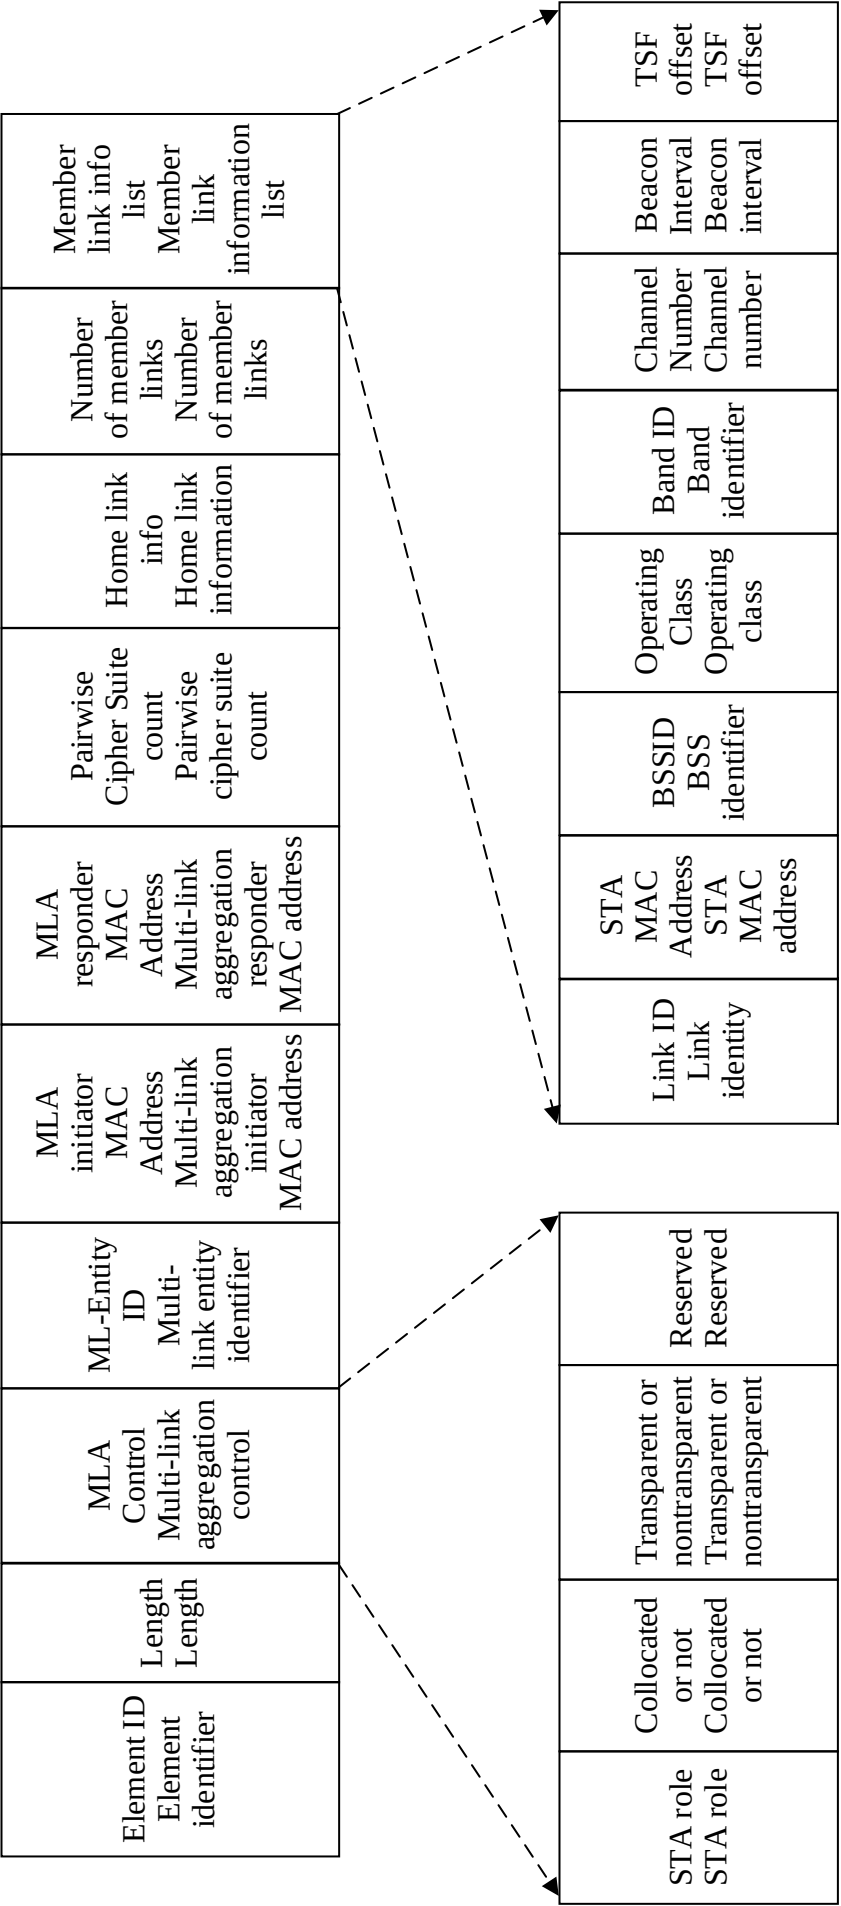


FIG. 9

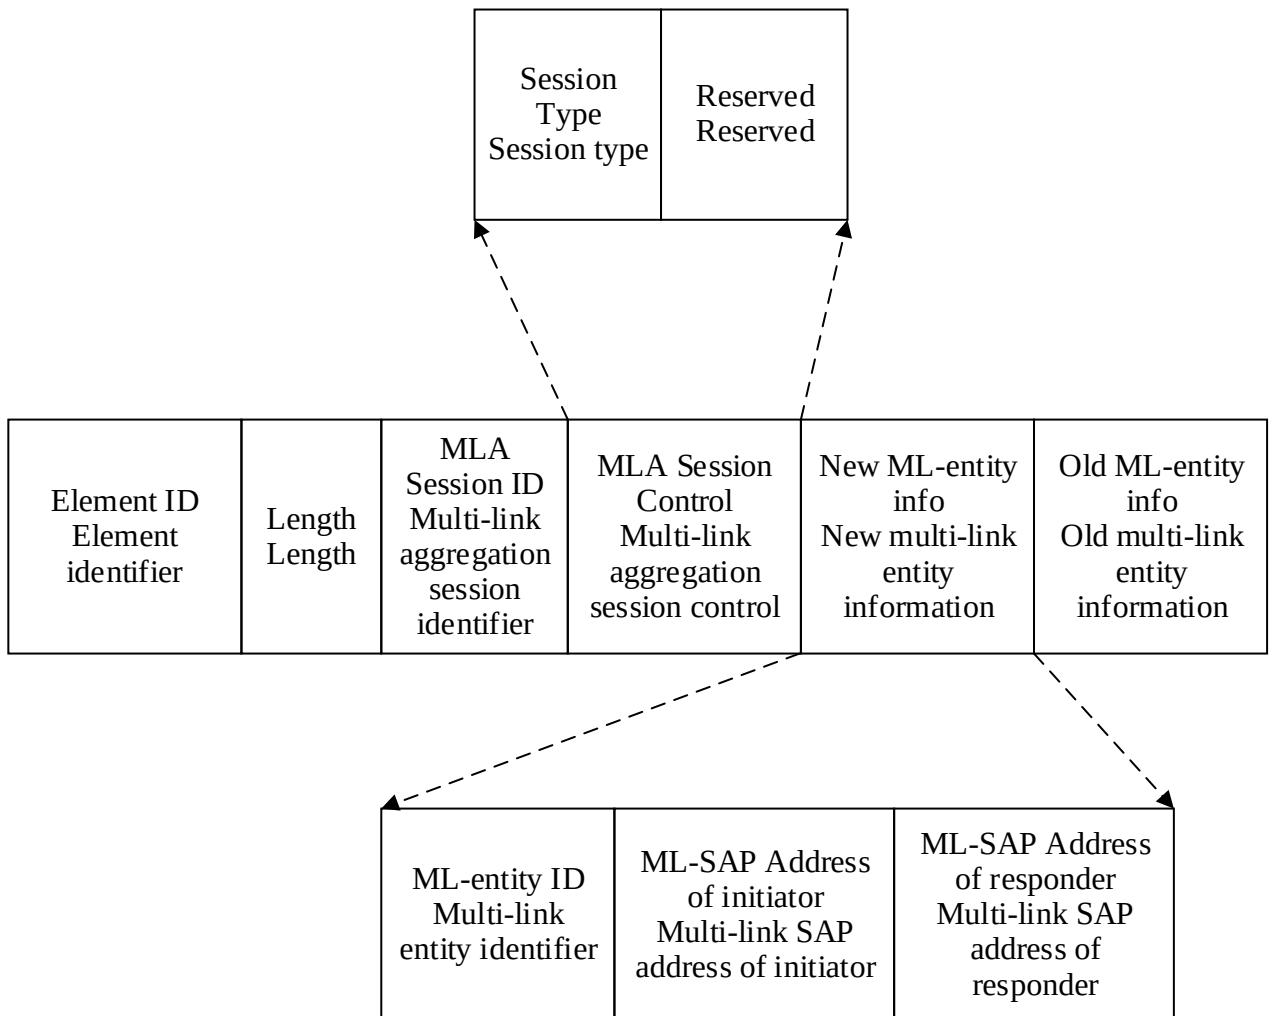


FIG. 10

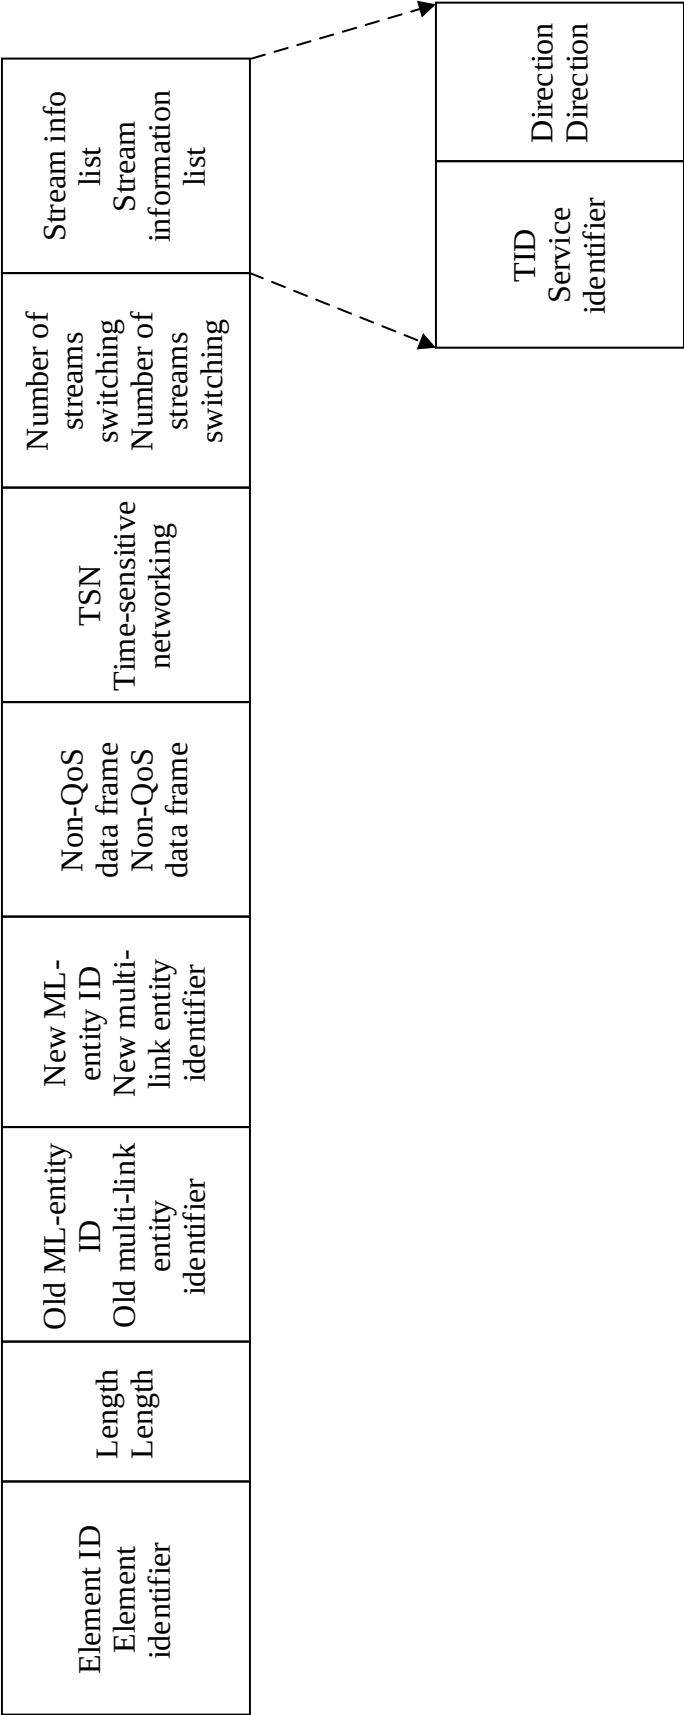


FIG. 11

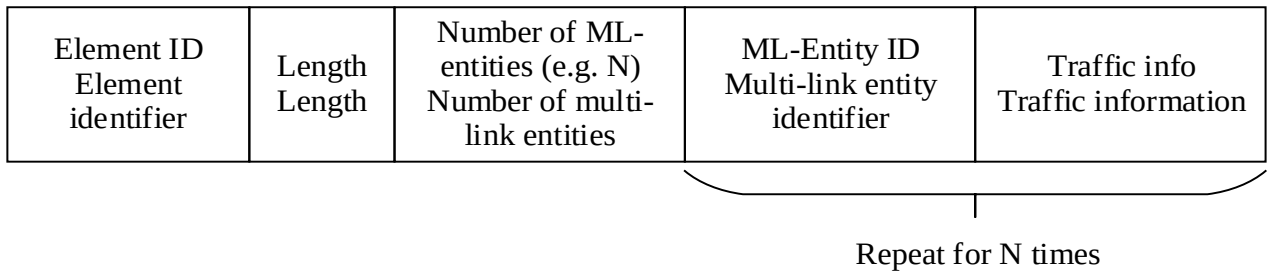


FIG. 12

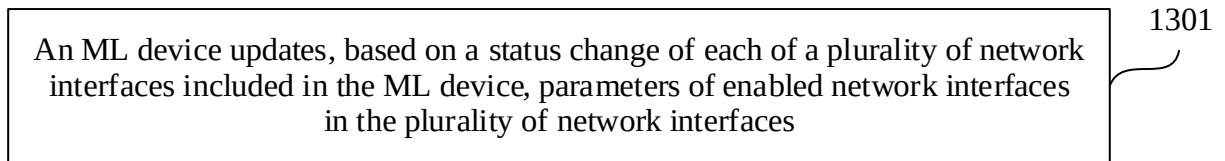


FIG. 13

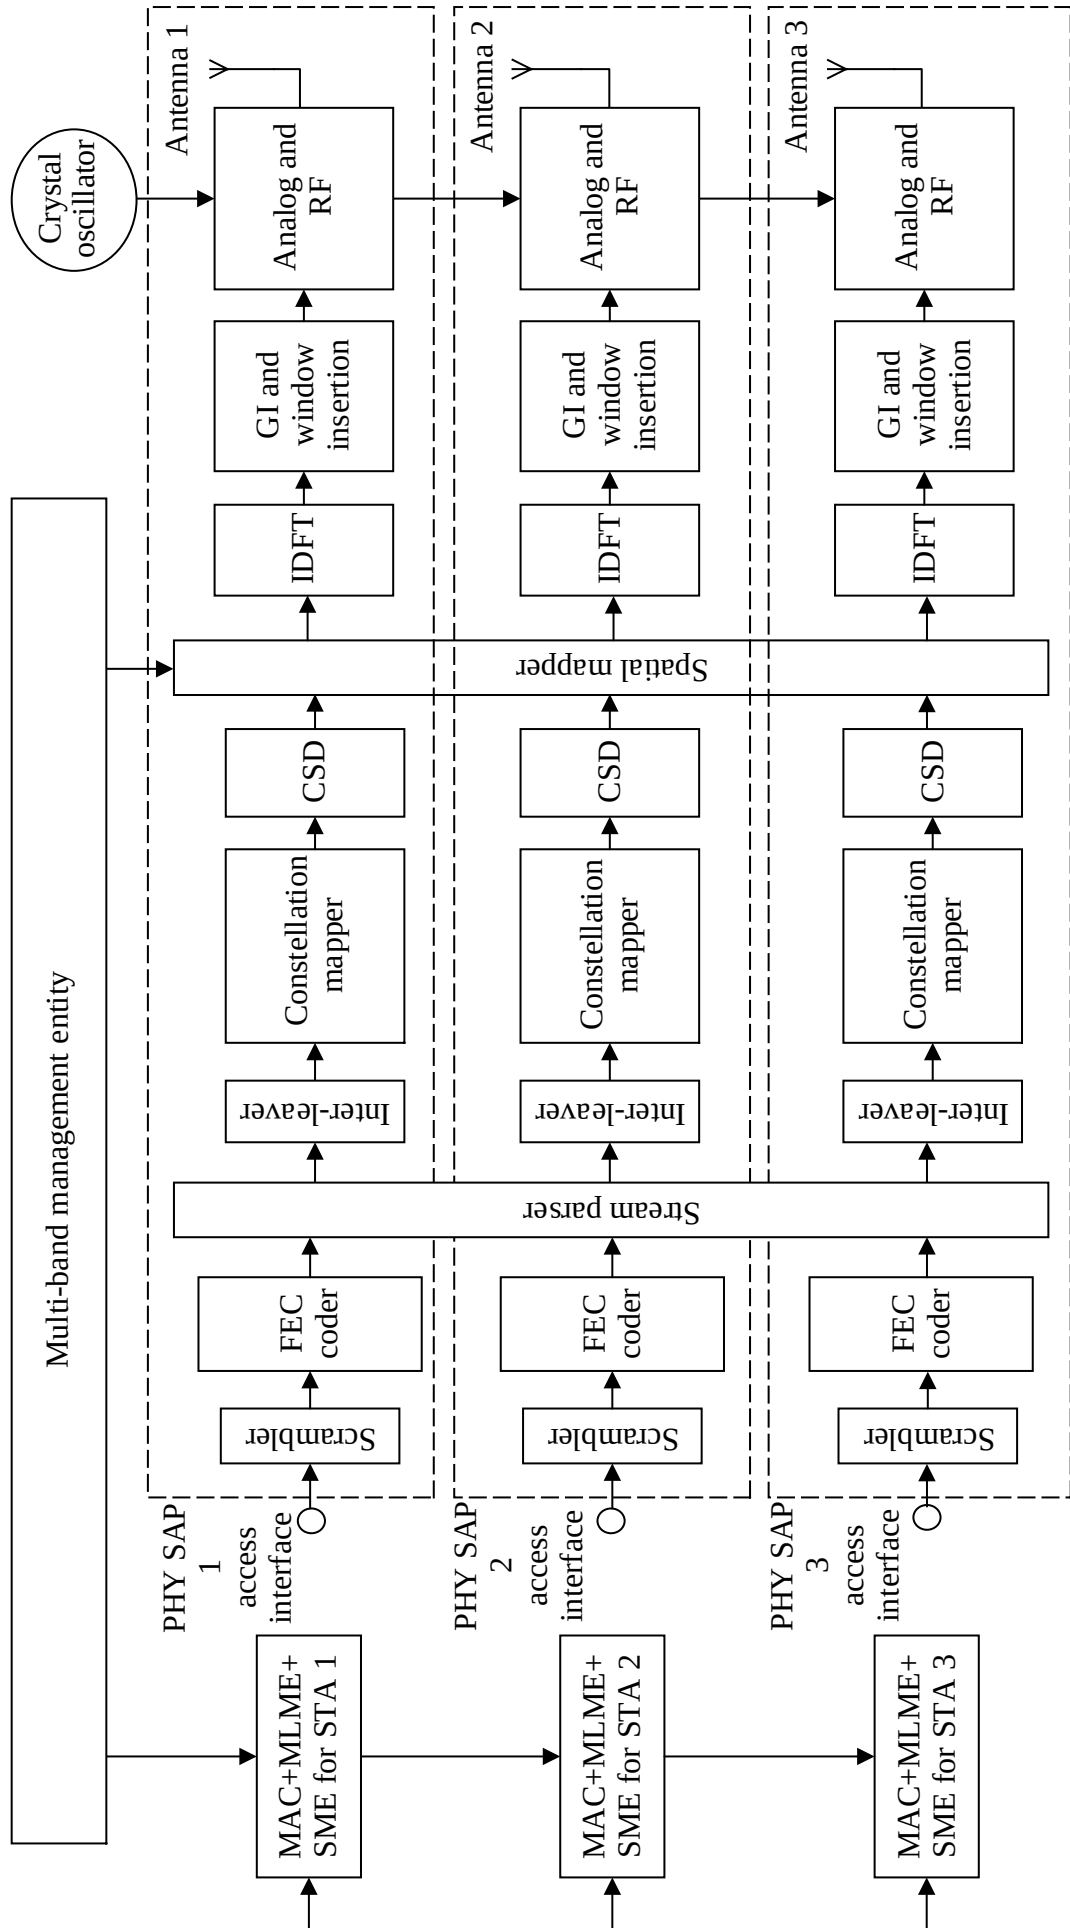


FIG. 14

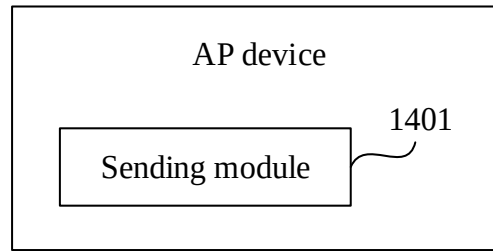


FIG. 15

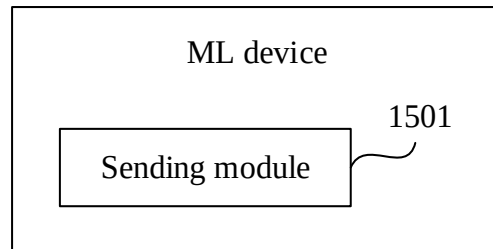


FIG. 16

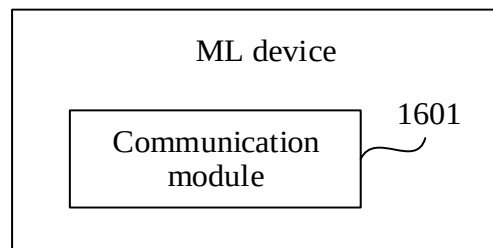


FIG. 17

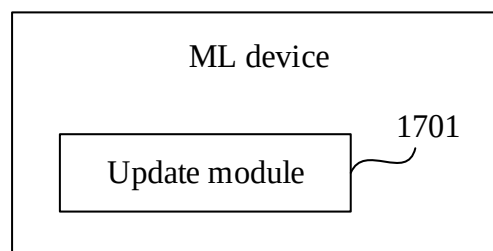


FIG. 18

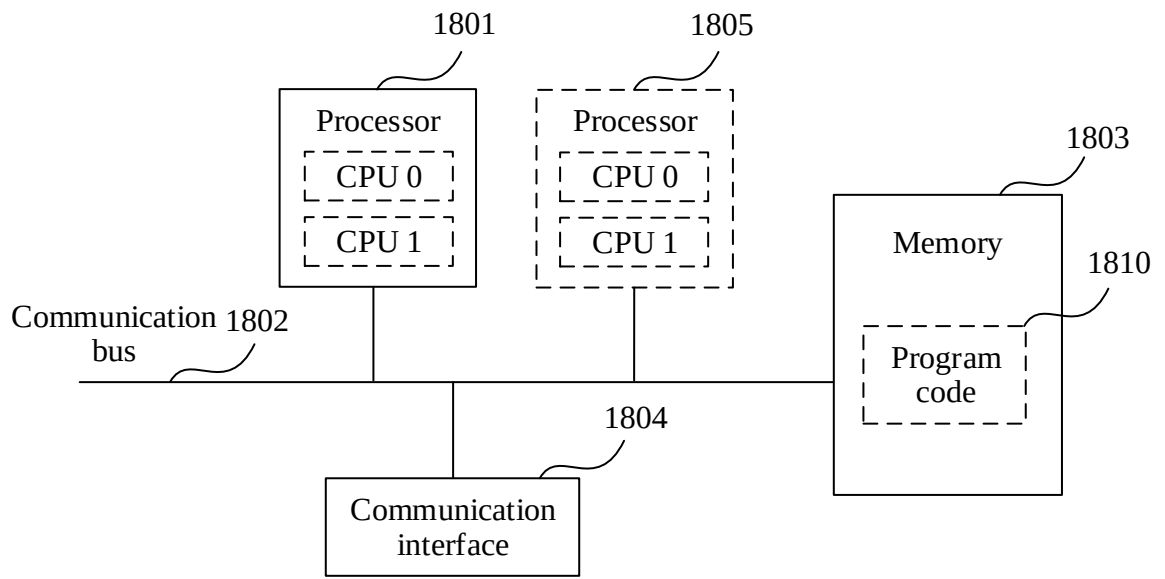


FIG. 19