



- (51) International Patent Classification:
B41J 2/045 (2006.01) *B41J 29/38* (2006.01)
- (21) International Application Number:
PCT/US2013/072274
- (22) International Filing Date:
27 November 2013 (27.11.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: HEWLETT-PACKARD DEVELOPMENT COMPANY, LP [US/US]; 11445 Compaq Center Drive W, Houston, Texas 77070 (US).
- (72) Inventors: **GHOZEIL, Adam L.**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **MAXFIELD, David**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **FRICKE, Peter James**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US).
- (74) Agents: **SAGALEWICZ, Angela M** et al.; Hewlett-Packard Company, Intellectual Property Administration, 3404 E. Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528-9599 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FLUID EJECTION APPARATUS WITH SINGLE POWER SUPPLY CONNECTOR

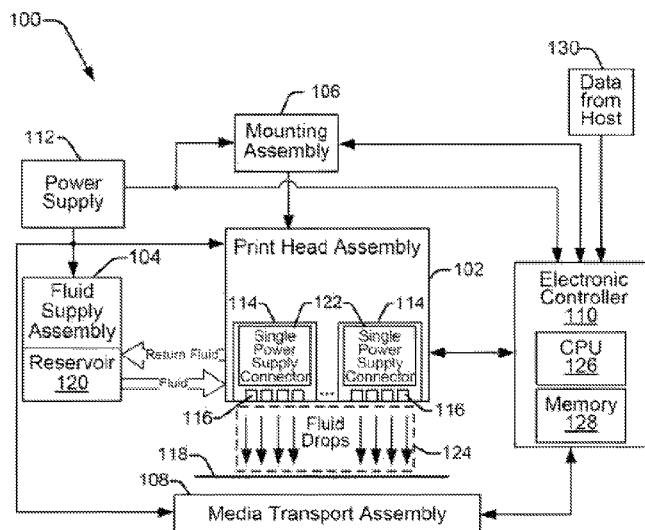


Figure 1

(57) Abstract: An example provides a fluid ejection apparatus including a fluid feed slot along a length of a print head die of the fluid ejection apparatus to supply a fluid to a plurality of drop ejectors, control circuitry adjacent to at least one side of the fluid feed slot to control ejection of drops of fluid from the plurality of drop ejectors, and a single power supply connector at an end of the print head die to supply power to the control circuitry.



Declarations under Rule 4.17:

— *as to the identity of the inventor (Rule 4.17(i))*

Published:

— *with international search report (Art. 21(3))*