Figure 1

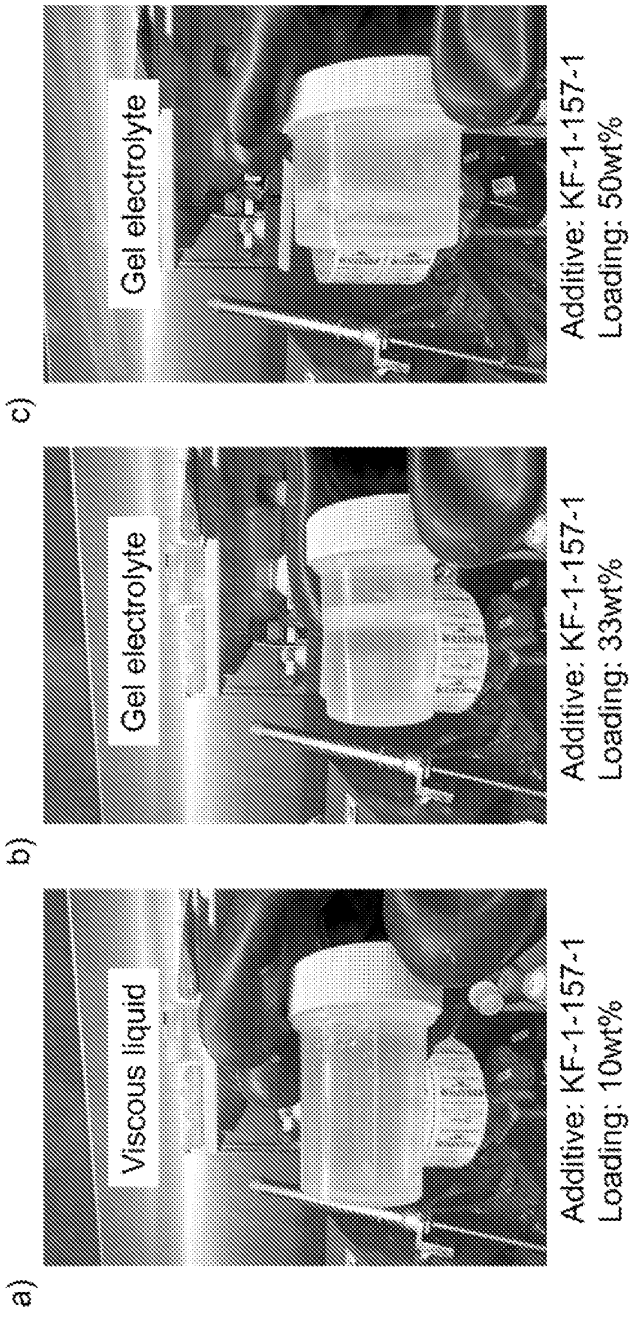
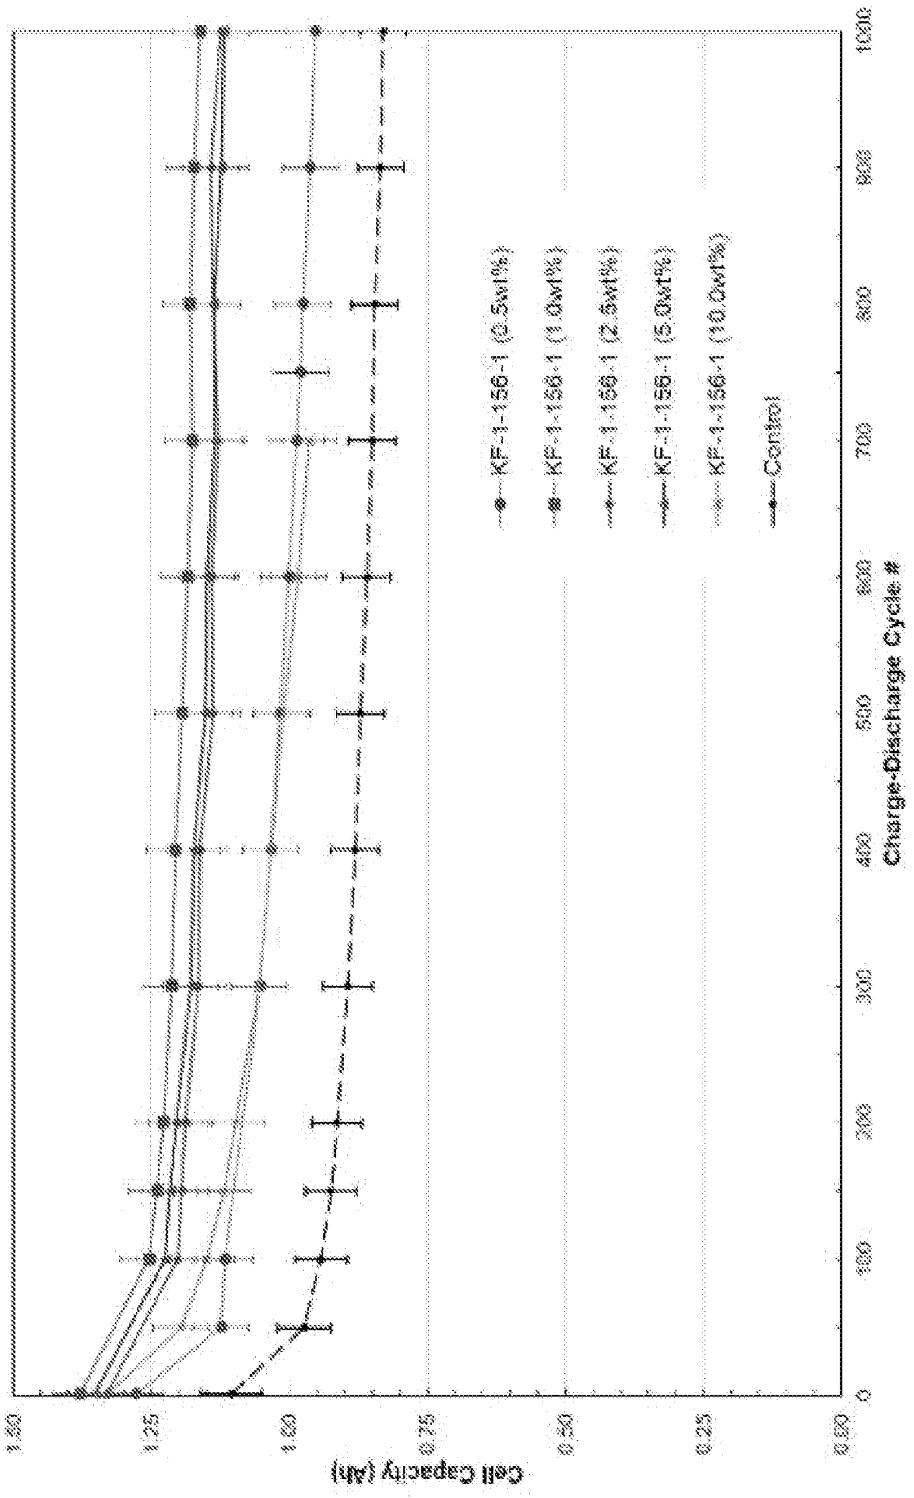
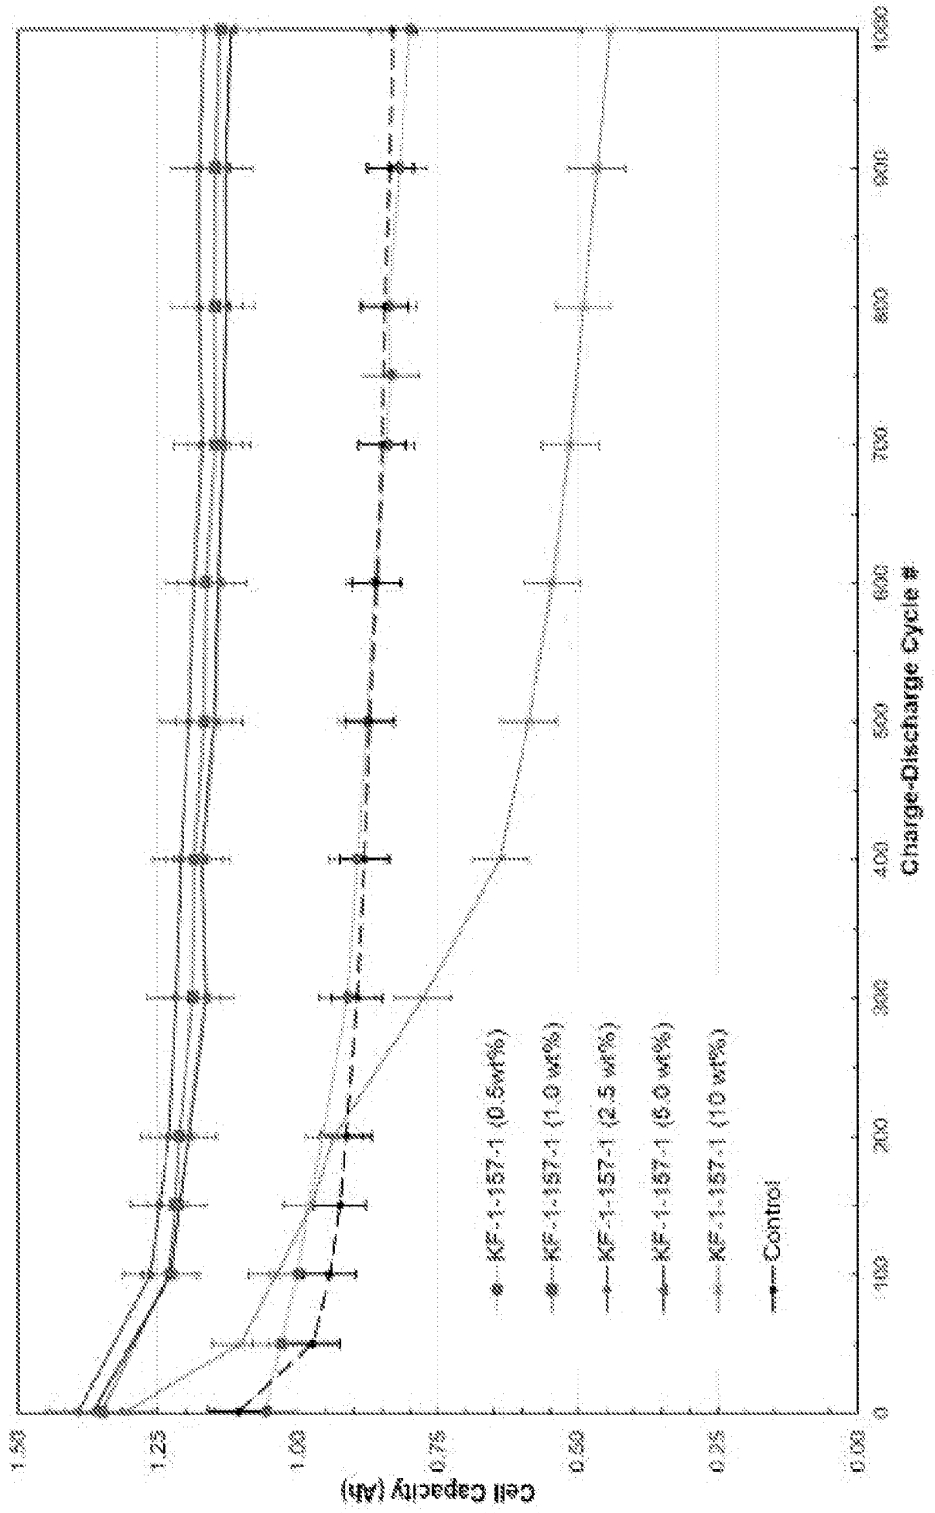

a)
Viscous liquid
Additive: KF-1-157-1
Loading: 10wt%
b)
Gel electrolyte
Additive: KF-1-157-1
Loading: 33wt%
c)
Gel electrolyte
Additive: KF-1-157-1
Loading: 50wt%

Figure 2 (a)



SUBSTITUTE SHEET (RULE 26)

Figure 2 (b)



SUBSTITUTE SHEET (RULE 26)

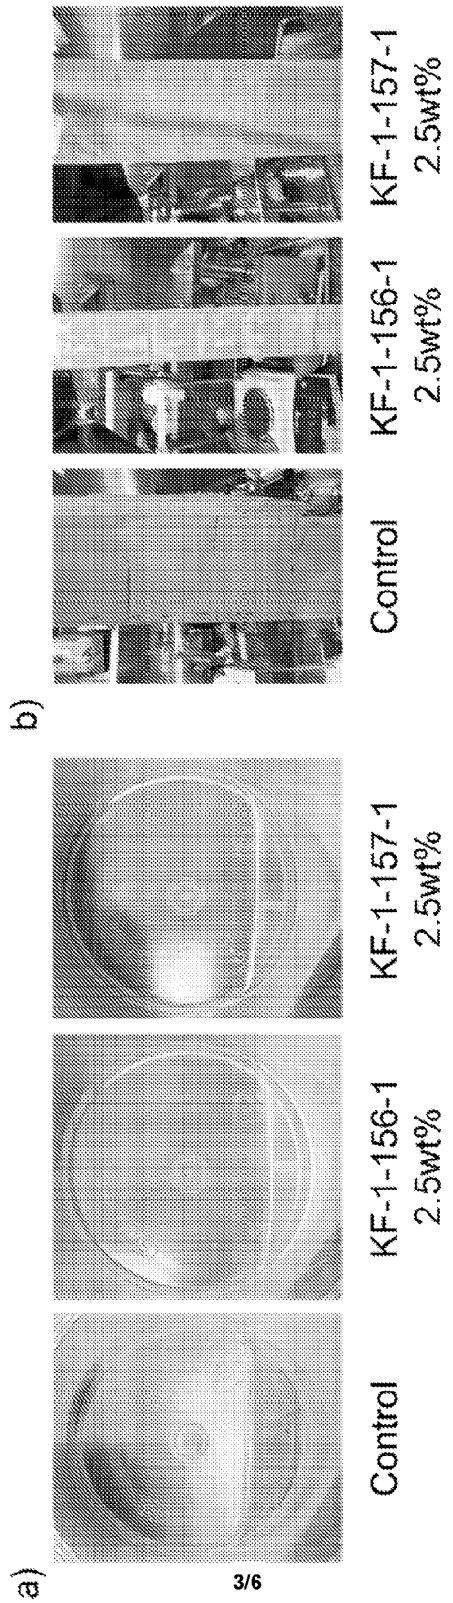
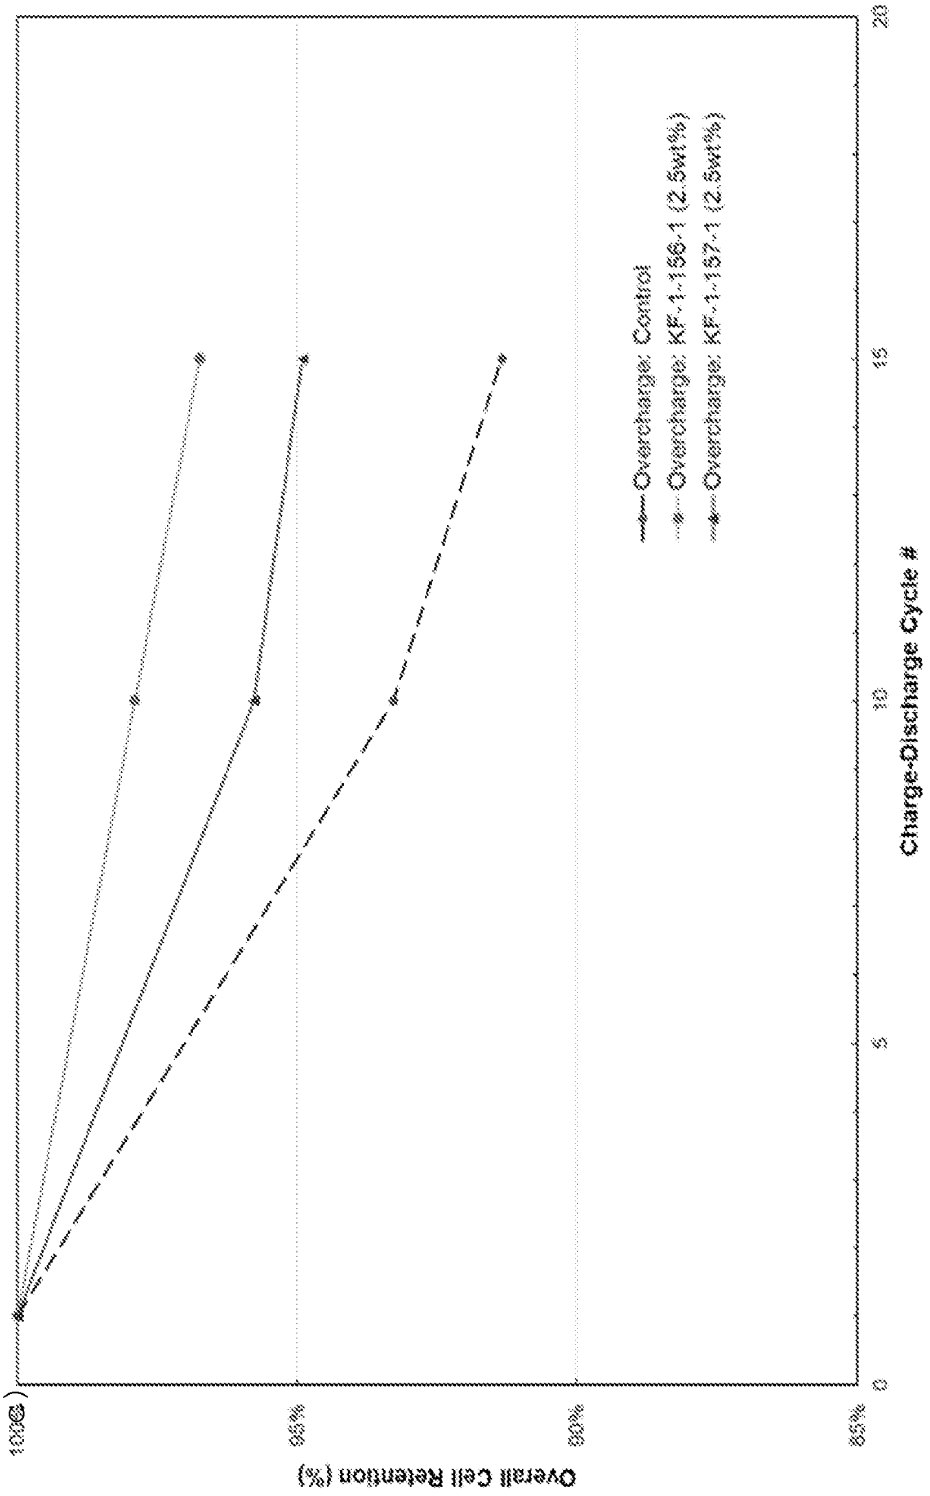

a)
Control
KF-1-156-1 2.5wt%
KF-1-157-1 2.5wt%
b)
Control
KF-1-156-1 2.5wt%
KF-1-157-1 2.5wt%

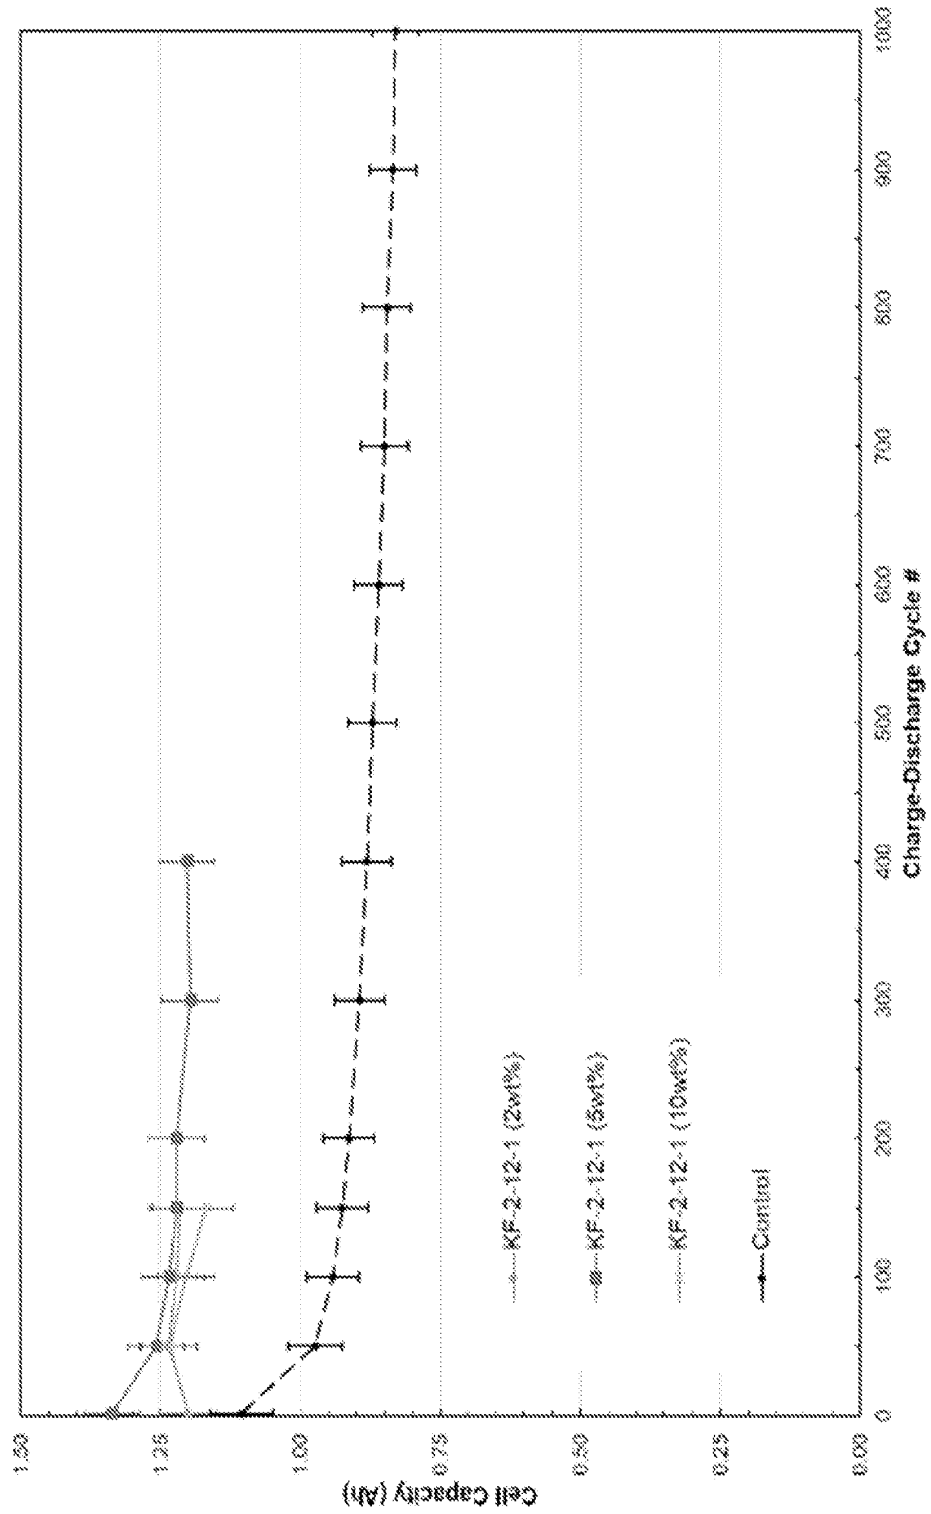
Figure 3

Figure 3



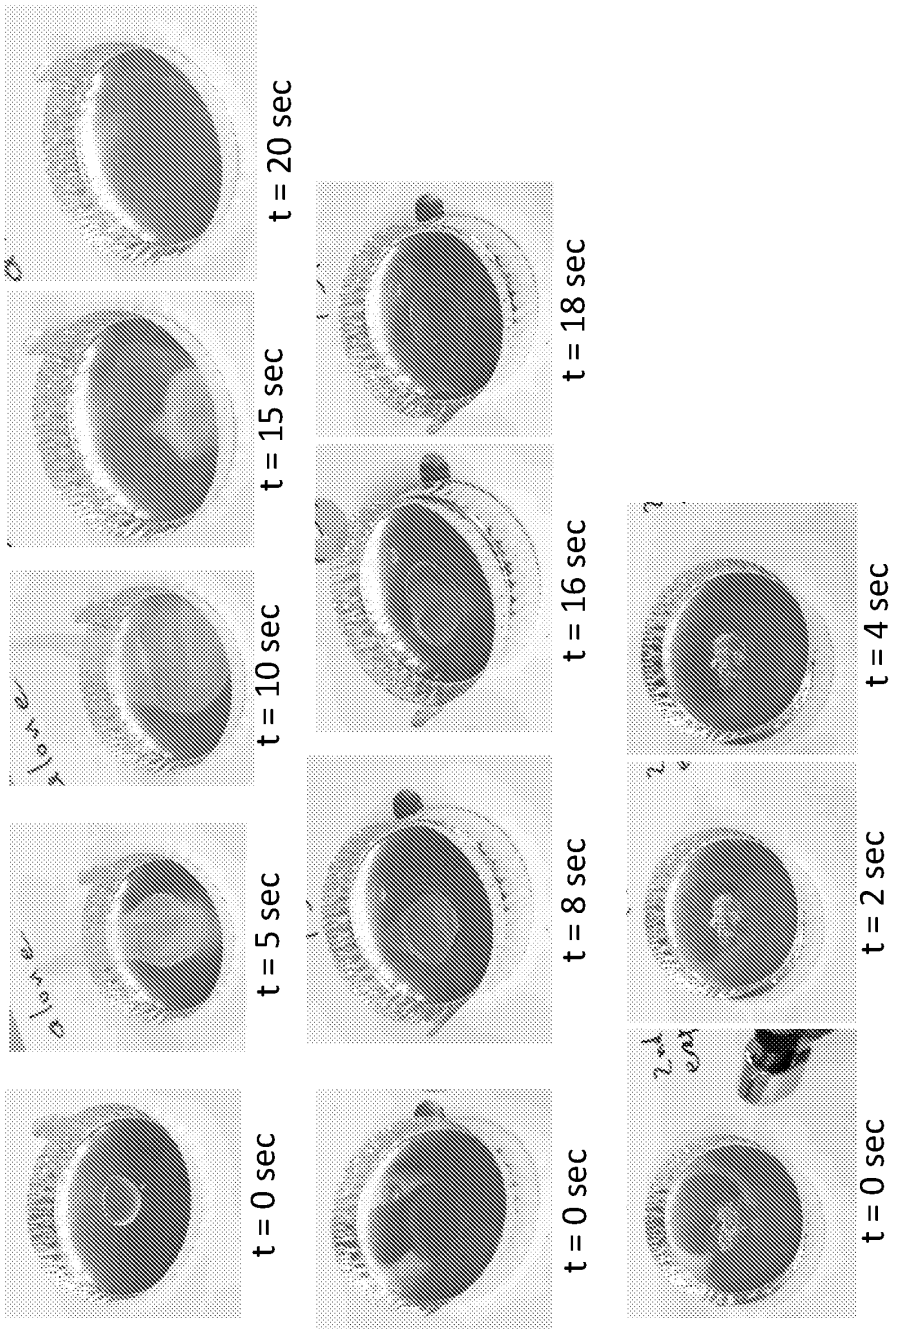
SUBSTITUTE SHEET (RULE 26)

Figure 4



SUBSTITUTE SHEET (RULE 26)

Figure 5


t = 0 sec
t = 5 sec
t = 10 sec
t = 15 sec
t = 20 sec
a) LP50 control
t = 0 sec
t = 8 sec
t = 16 sec
t = 18 sec
b) 33% Compound 2
t = 0 sec
t = 2 sec
t = 4 sec
c) 50% Compound 2