

FIG. 1

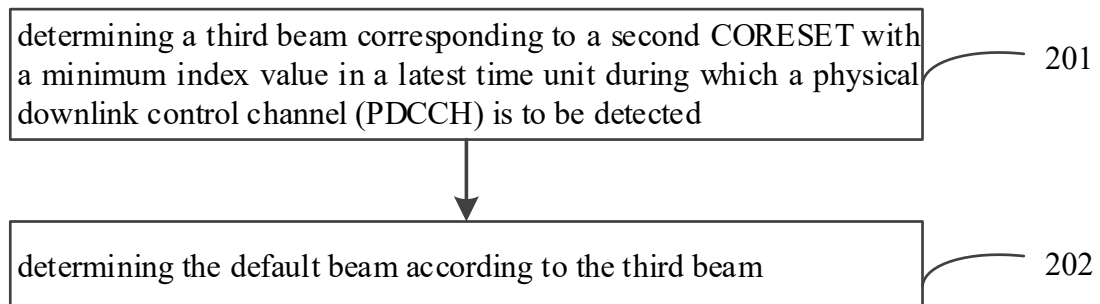


FIG. 2

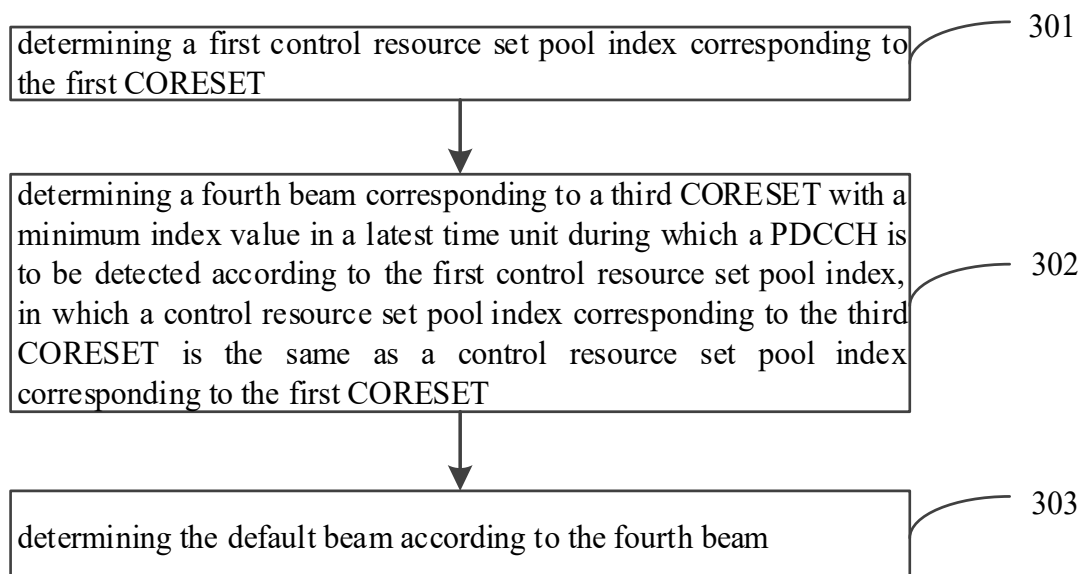


FIG. 3

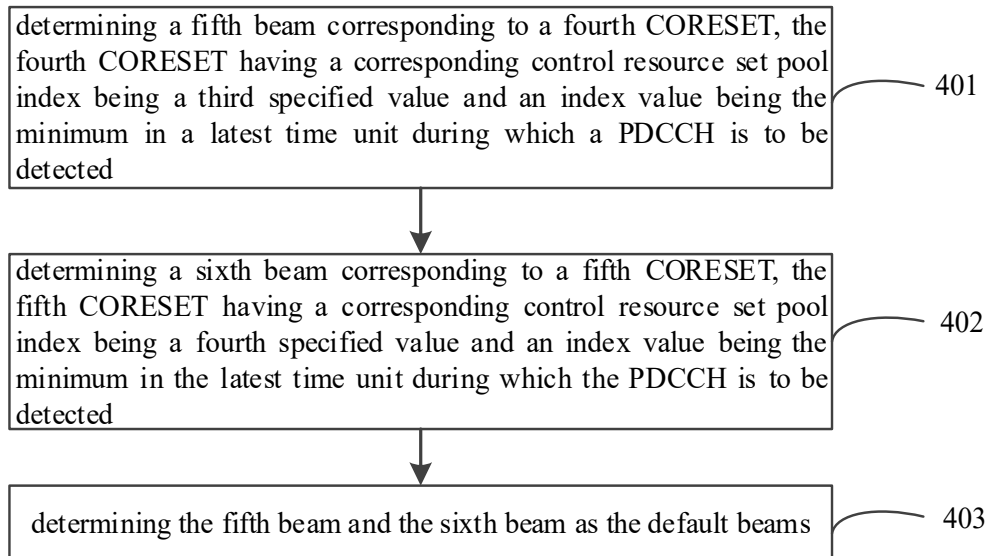


FIG. 4

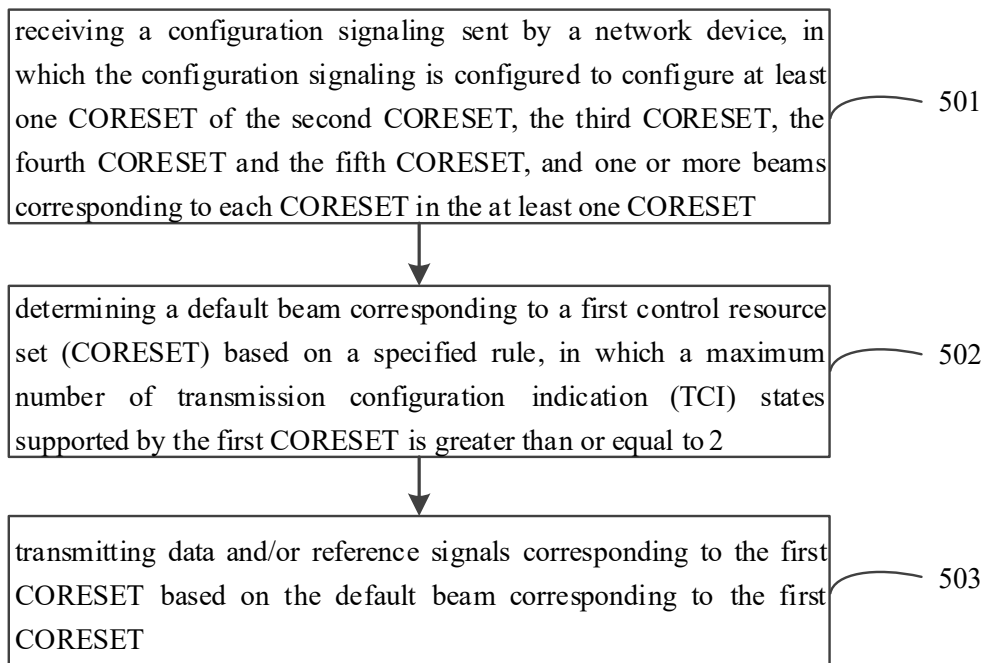


FIG. 5

determining a default beam corresponding to a first control resource set (CORESET) based on a specified rule, in which a maximum number of transmission configuration indication (TCI) states supported by the first CORESET is greater than or equal to 2

FIG. 6

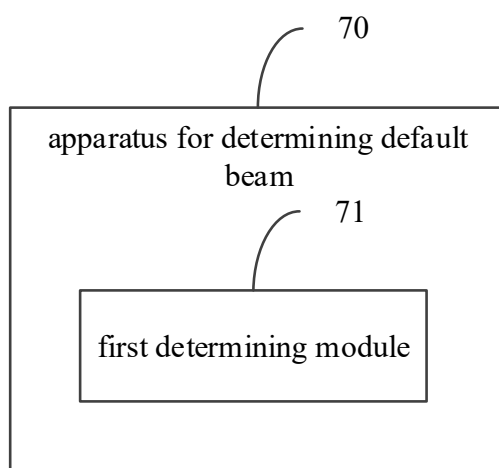


FIG. 7

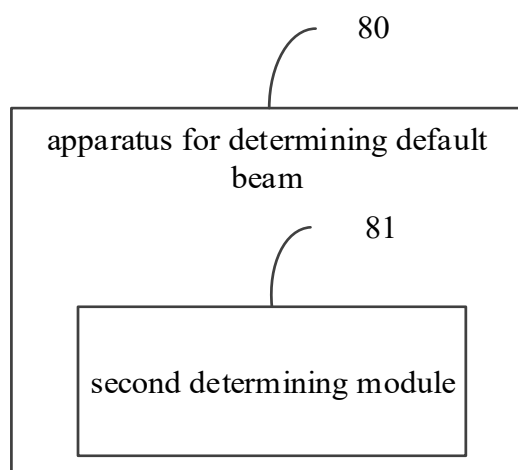


FIG. 8

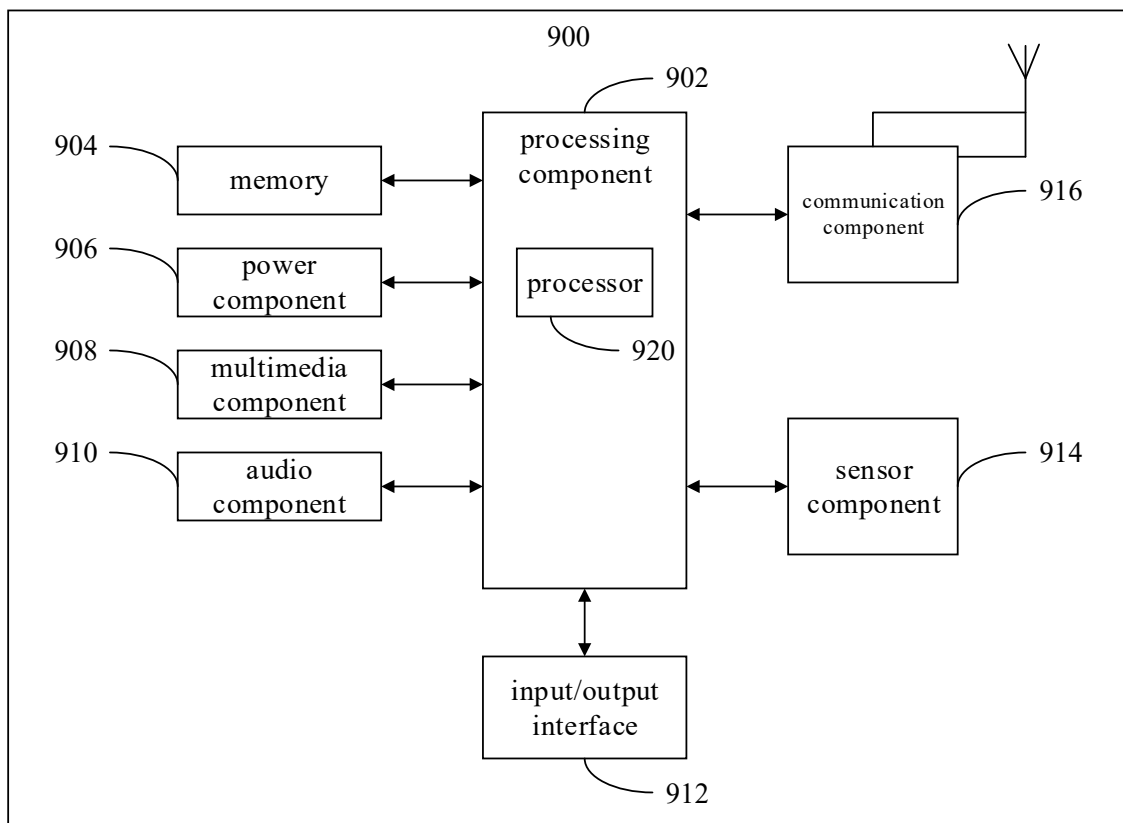


FIG. 9

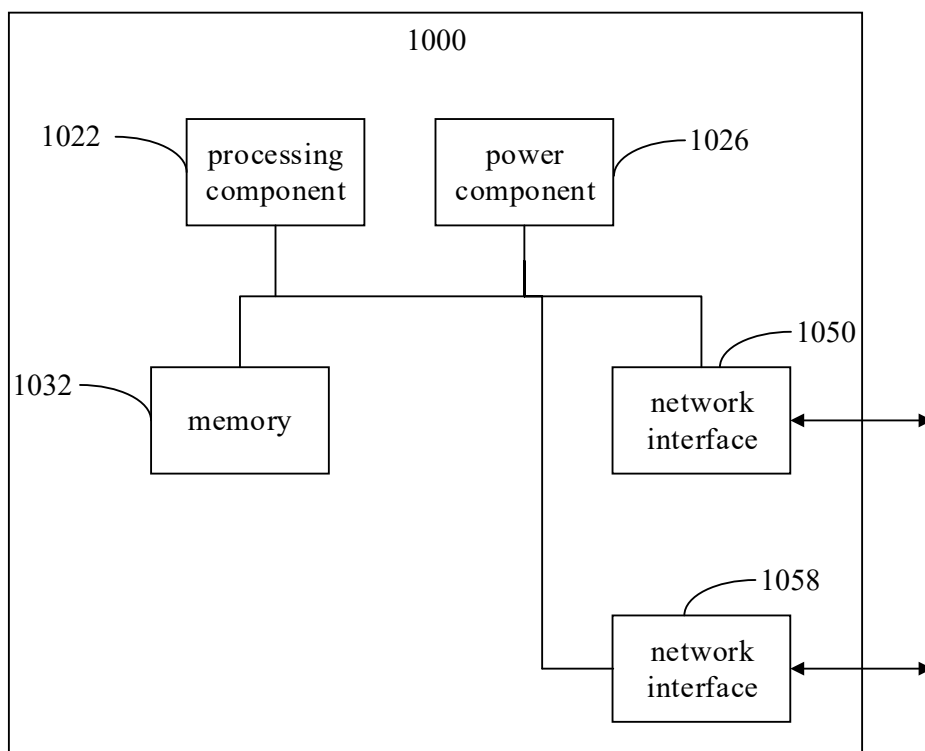


FIG. 10