



(51) International Patent Classification:
A61H 35/02 (2006.01)

[US/US]; 1345 Meridian Ranch Drive, Reno, NV 89523 (US).

(21) International Application Number:
PCT/US2011/056951

(74) Agents: **LOWRY, Scott, M.** et al.; Lowry Blixseth LLP, 23632 Calabasas Rd., Ste. 201, Calabasas, CA 91302 (US).

(22) International Filing Date:
19 October 2011 (19.10.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/405,536 21 October 2010 (21.10.2010) US
13/276,236 18 October 2011 (18.10.2011) US

(71) Applicant (for all designated States except US): **HAWS CORPORATION** [US/US]; 1455 Kleppe Lane, Sparks, NV 89431 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STANLEY, Stephen** [US/US]; 7095 Strauss Drive, Sun Valley, NV 89433 (US). **ROBERTS, Ian, T.** [US/US]; 4812 Frankie Way, Sparks, NV 89436 (US). **GONCZE, Zoltan**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,

[Continued on next page]

(54) Title: FAUCET MOUNTED EYEWASH UNIT

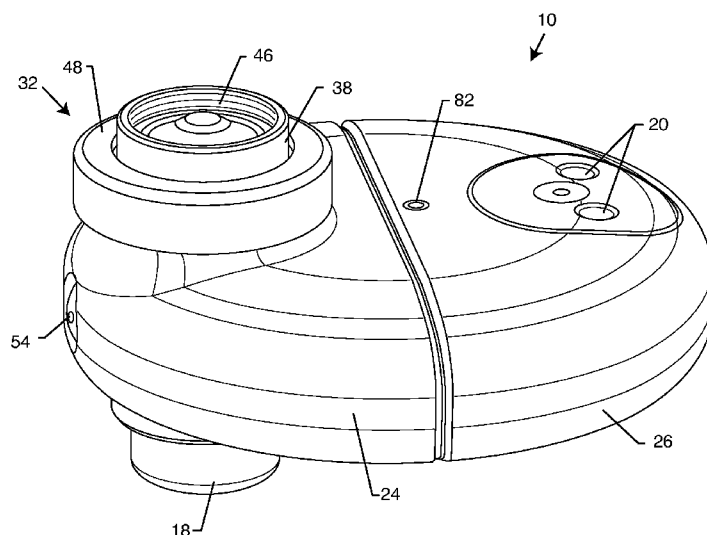


FIG. 1

(57) Abstract: A faucet mounted eyewash unit for installation onto the discharge end of a standard faucet spout. The eyewash unit in a normal faucet mode position permits uninterrupted water flow through the faucet spout. In an eyewash mode, a portion of the eyewash unit is rotated quickly and easily to orient a pair of eyewash discharge ports in upwardly open positions, and to couple these eyewash discharge ports to the water flow for upward trajectory of a pair of eyewash flushing streams. The eyewash unit further includes a thermostat for preventing hot water flow above a selected temperature level to the eyewash discharge ports.



DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS,
SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*