



(51) International Patent Classification:

E21B 43/08 (2006.01) *E21B 47/00* (2006.01)
B01D 35/02 (2006.01) *G01N 33/28* (2006.01)
E21B 43/10 (2006.01)

(21) International Application Number:

PCT/CA2011/000698

(22) International Filing Date:

13 June 2011 (13.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/353,998 11 June 2010 (11.06.2010) US

(71) Applicant (for all designated States except US): **ABSOLUTE COMPLETION TECHNOLOGIES LTD.**
[CA/CA]; #9, 2816 - 21 Street NE, Calgary Alberta T2E 6Z2 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WOICESHYN, Glenn, Edward** [CA/CA]; c/o #9, 2816 - 21 Street NE, Calgary Alberta T2E 6Z2 (CA).

(74) Agents: **CALDWELL, Roseann, B . et al.**; c/o Bennett Jones LLP, 4500 Bankers Hall East, 855 2nd Street SW, Calgary, Alberta T2P 4K7 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: WELLBORE FLUID TREATMENT TUBULAR AND METHOD

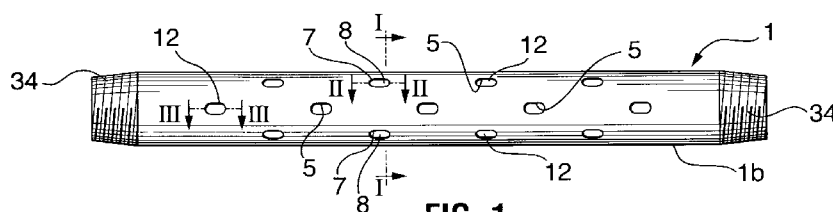


FIG. 1

(57) Abstract: A cartridge-type wellbore screen includes: a cylindrical wall including a first end, a second end opposite the first end, an inner surface defining an inner diameter of the wellbore screen, the inner diameter being open from the first end to the second end, and an outer surface; an opening to the inner diameter through the cylindrical wall the opening extending between the outer surface and the inner surface to provide fluid access from the outer surface to the inner diameter; a fluid filtering material positioned to filter oversized particles from passing through the opening; and a fluid tracing material carried by the wellbore tubular and mounted at a mounting site spaced from the opening to the inner diameter and outwardly of the inner diameter, the mounting site being positioned such that a fluid flow path is restricted to be from the mounting site, along the outer surface and through the opening before entering the inner diameter. The screen can be used for treating wellbore fluids.