



(43) International Publication Date
30 June 2016 (30.06.2016)

- (51) International Patent Classification:
B29C 37/00 (2006.01) *G03F 7/00* (2006.01)
B29C 59/04 (2006.01)
- (21) International Application Number:
PCT/EP2015/076936
- (22) International Filing Date:
18 November 2015 (18.11.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14199804.7 22 December 2014 (22.12.2014) EP
- (71) Applicant: **OBDUCAT AB** [SE/SE]; Scheelevägen 2,
22363 Lund (SE).
- (72) Inventors: **HEIDARI, Babak**; c/o Obducat AB,
Scheelevägen 2, 22363 Lund (SE). **LARSSON, Göran**;
c/o Obducat AB, Scheelevägen 2, 22363 Lund (SE).
- (74) Agent: **NEIJ & LINDBERG AB**; Pedellgatan 11, 224 60
Lund (SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: MOUNTING AND DEMOLDING DEVICE

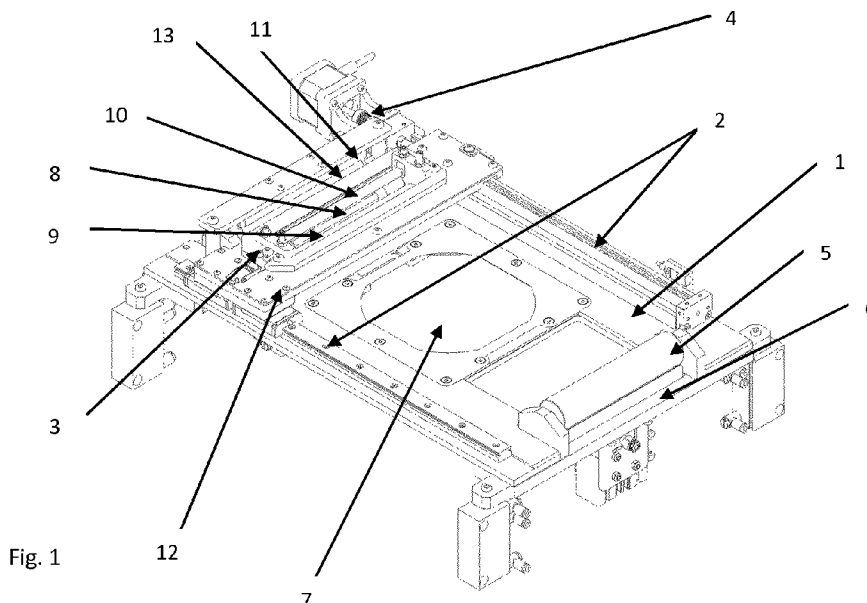


Fig. 1

(57) Abstract: A demolding device (3) for use in an imprint machine, in which machine a foil (31) is intermittently passed in a feed direction over a press region (7) where a stamp is pressed against the foil for imprinting a surface pattern. The demolding device comprises a carrier (12), a pressing roller (9) mounted in the carrier, and a demolding roller (8) mounted parallel to the pressing roller in the carrier, wherein the carrier is configured to slide over the press region against the feed direction while rolling the foil under the pressing roller and over the demolding roller for detaching the foil from the stamp after imprinting of the pattern.

