



- (51) **International Patent Classification:**
B42D 15/00 (2006.01) *G07D 7/12* (2006.01)
B42D 15/10 (2006.01)
- (21) **International Application Number:**
PCT/EP2012/074164
- (22) **International Filing Date:**
30 November 2012 (30.11.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11306603.9 2 December 2011 (02.12.2011) EP
- (71) **Applicant:** GEMALTO S.A. [FR/FR]; Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).
- (72) **Inventor:** NIKKILA, Jarmo; Gemalto S.A., Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).
- (74) **Agent:** COUR, Pierre; Gemalto S.A., Intellectual Property Department, 6, rue de la Verrerie, F-92190 Meudon (FR).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** SECURITY DOCUMENT AND METHOD OF MANUFACTURING SECURITY DOCUMENT

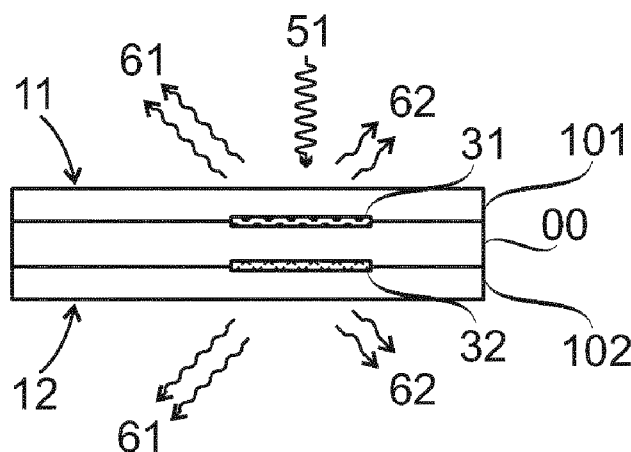


Fig. 3

(57) **Abstract:** A security document having a first side (11) and a second side (12), the security document comprising a first pattern (31) and a second pattern (32) located closer to the second side (12) than the first pattern (31), the first pattern (31) and the second pattern (32) overlapping such that the overlapping area defines a shape of a security pattern (40). The first pattern (31) comprises first single fluorescent substance adapted to emit first visible light (61), and the second pattern (32) comprises second single fluorescent substance adapted to emit second visible light (62). When the security pattern (40) is irradiated from the direction of the first side (11) the first visible light (61) dominates the second visible light (62) at the first excitation radiation (51) and the second visible light (62) dominates the first visible light (61) at the second excitation radiation (52).