



(51) International Patent Classification:  
*F15B 3/00* (2006.01)

(21) International Application Number:  
PCT/EP2011/069172

(22) International Filing Date:  
31 October 2011 (31.10.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10189641.3 2 November 2010 (02.11.2010) EP

(71) Applicant (for all designated States except US): **VETCO GRAY CONTROLS LIMITED** [GB/GB]; 2, High Street, Nailsea, Bristol BS48 1BS (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ROBERTS, Timothy James** [GB/GB]; 12 Riverside Park, Severn Beach South Gloucestershire BS35 4PN (GB).

(74) Agent: **ILLINGWORTH-LAW, William**; GE International Inc., Global Patent Operation - Europe, 15 John Adam Street, London WC2N 6LU (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HIGH PRESSURE INTENSIFIERS

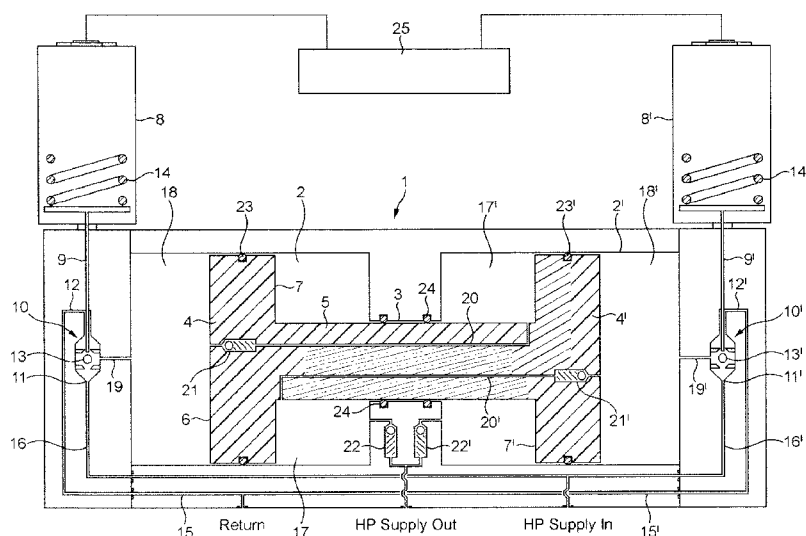


FIG. 1

(57) Abstract: A hydraulic intensifier (1) comprises a reciprocating differential piston arrangement (3, 4, 4') and control means for controlling the supply of low pressure hydraulic fluid to the intensifier, said control means comprising at least one solenoid operated pilot valve (10, 10') and electronic means (25) for operating the pilot valve.