



(51) International Patent Classification:

F41H 13/00 (2006.01) H05C 1/06 (2006.01)
F41B 15/04 (2006.01)

(21) International Application Number:

PCT/US2022/024769

(22) International Filing Date:

14 April 2022 (14.04.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/175,422 15 April 2021 (15.04.2021) US

(71) Applicant: **AXON ENTERPRISE, INC.** [US/US]; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).

(72) Inventor: **NERHEIM, Magne H.**; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).

(74) Agent: **GRAHAM, Andrew**; 17800 N 85th Street, Scottsdale, Arizona 85255 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: METHODS AND APPARATUS FOR A HIGH VOLTAGE CIRCUIT

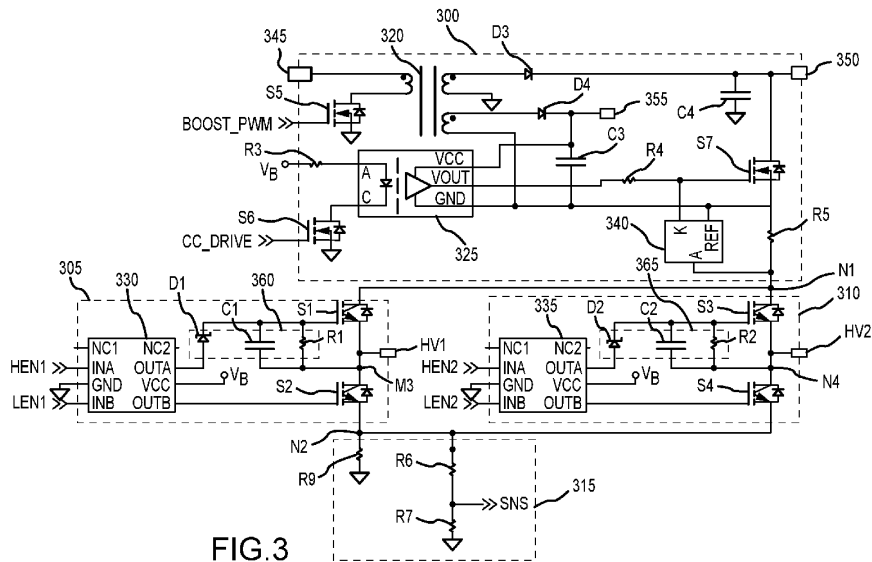

(57) Abstract: A conducted electrical weapon ("CEW") comprises one or more switch devices and a charge storage circuit for delivering a stimulus signal via a deployed electrode. A charge may be stored in the charge storage circuit. A first switch device of the one or more switch devices may be selectively turned on according to the charge of the charge storage circuit. The stimulus signal may be delivered via a current flow path comprising the first switch device and the deployed electrode according to the charge of the charge storage circuit.

[Continued on next page]

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*