



(51) International Patent Classification:

G01M 9/04 (2006.01) **F28F 9/02** (2006.01)
A63G 31/00 (2006.01) **F28F 9/06** (2006.01)
B64D 23/00 (2006.01) **F28F 9/26** (2006.01)
F28F 1/02 (2006.01)

(21) International Application Number:

PCT/US2011/021437

(22) International Filing Date:

15 January 2011 (15.01.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/295,229 15 January 2010 (15.01.2010) US

(71) Applicant (for all designated States except US):
SKYVENTURE INTERNATIONAL LTD [BS/BS];
P.O. Box N-3944, Suite 13, Caves Professional Center,
Nassau (BS).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **METNI, N, Alan**
[US/US]; 5000 Plaza on the Lake - Suite 290, Austin,
Texas 78746 (US). **ARLITT, Mark** [US/US]; 10815
Chestnut Ridge Road, Austin, Texas 78726 (US).

(74) Agent: **POLSON, Margaret**; Oppedahl Patent Law Firm
LLC, PO Box 5940, Dillon, Colorado 80435-5940 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

[Continued on next page]

(54) Title: WIND TUNNEL TURNING VANE HEAT EXCHANGER

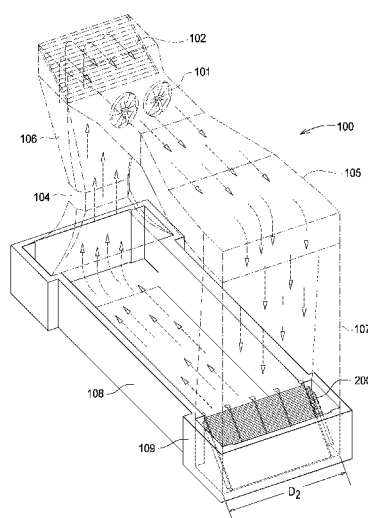


FIG. 1

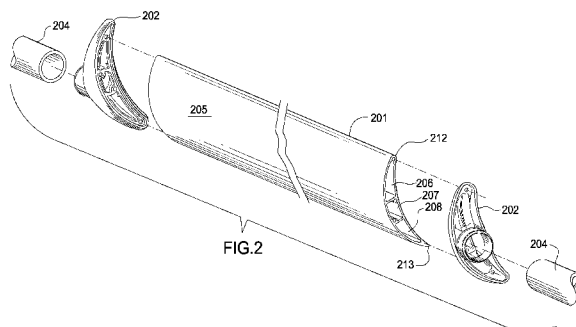


FIG. 2

(57) Abstract: A cooling system for a wind tunnel (100) is disclosed. The heat exchanger (200) of the present disclosure is formed as a turning vane assembly in an airflow duct of a re-circulating wind tunnels. The individual vanes (201) are formed from extruded aluminum with coolant fluid channels (206, 207, 208) running continually down the length of the vane. One or more channels can be used, depending on the application of vane and the cooling capacity needed. The exterior of the vanes are formed in an airfoil shape to efficiently turn the air flow the desired amount in a manner well known in the art. The turning vanes are connected to a fluid supply (204) with single piece connectors (202) that removably attach to the turning vanes. In the depicted embodiment the connectors are attached with screws. In the depicted embodiment the connectors are formed as a single piece in a two-piece injection mold.



HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

Published:

— *with international search report (Art. 21(3))*