



- (51) International Patent Classification:
G08B 23/00 (2006.01) *G01F 1/00* (2006.01)
- (21) International Application Number:
PCT/AU2012/000116
- (22) International Filing Date:
9 February 2012 (09.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2011900421 9 February 2011 (09.02.2011) AU
- (71) Applicant (for all designated States except US): **SOUTH EAST WATER LIMITED** [AU/AU]; 20 Corporate Drive, Heatherton, Victoria 3202 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **FORSTER-KNIGHT, Andrew** [AU/AU]; 9 Ash Grove, Oak Park, Victoria 3046 (AU).
- (74) Agent: **FB RICE**; Level 23, 200 Queen Street, Melbourne, Victoria 3000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WIRELESSLY NETWORKED FLUID MONITORING METHOD, SYSTEM AND APPARATUS

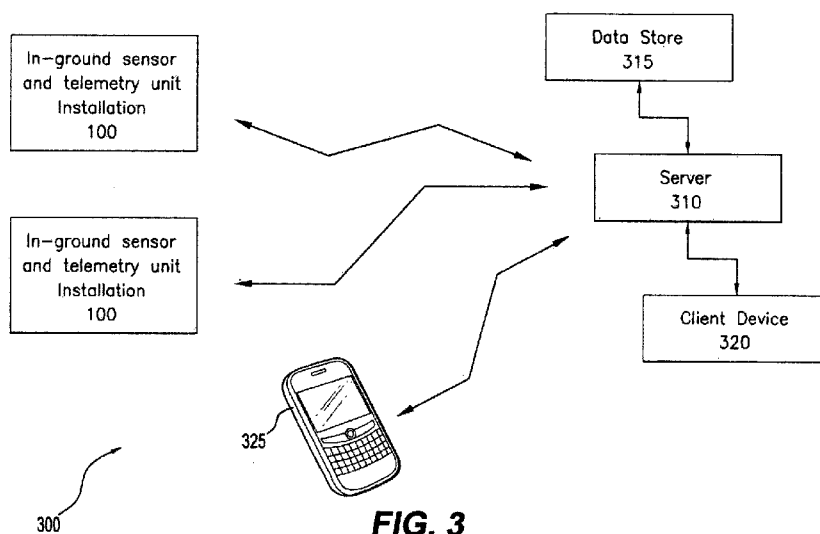


FIG. 3

(57) Abstract: Some embodiments relate to a fluid monitoring system, comprising: a housing positioned in-ground above a buried fluid conduit, the housing having a lockable access hatch to allow access to an internal volume of the housing from surface level; at least one sensor accessible through the internal volume and arranged to sense at least one condition of fluid in the fluid conduit; and a wireless telemetry unit supported in the housing and coupled to receive output signals from the at least one sensor in relation to the at least one condition. Some embodiments relate to methods usable by such systems. Some embodiments relate to fluid supply/drainage zone monitoring systems and methods employing multiple in-ground installations.

