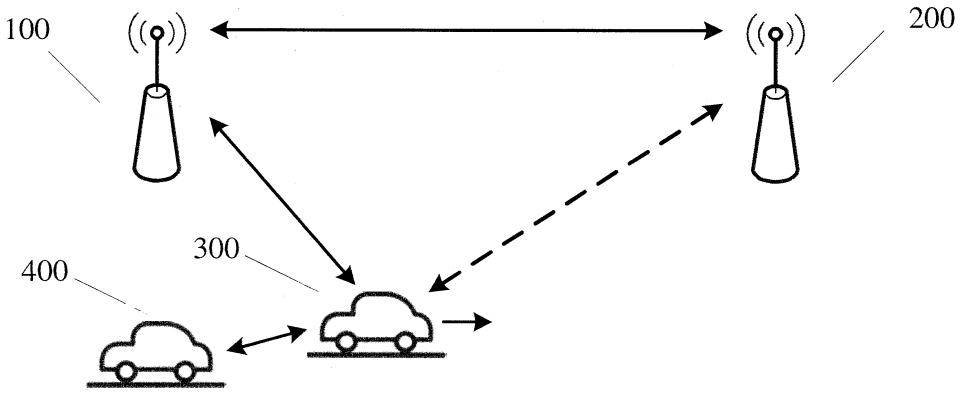
100
200
300
400

FIG. 1

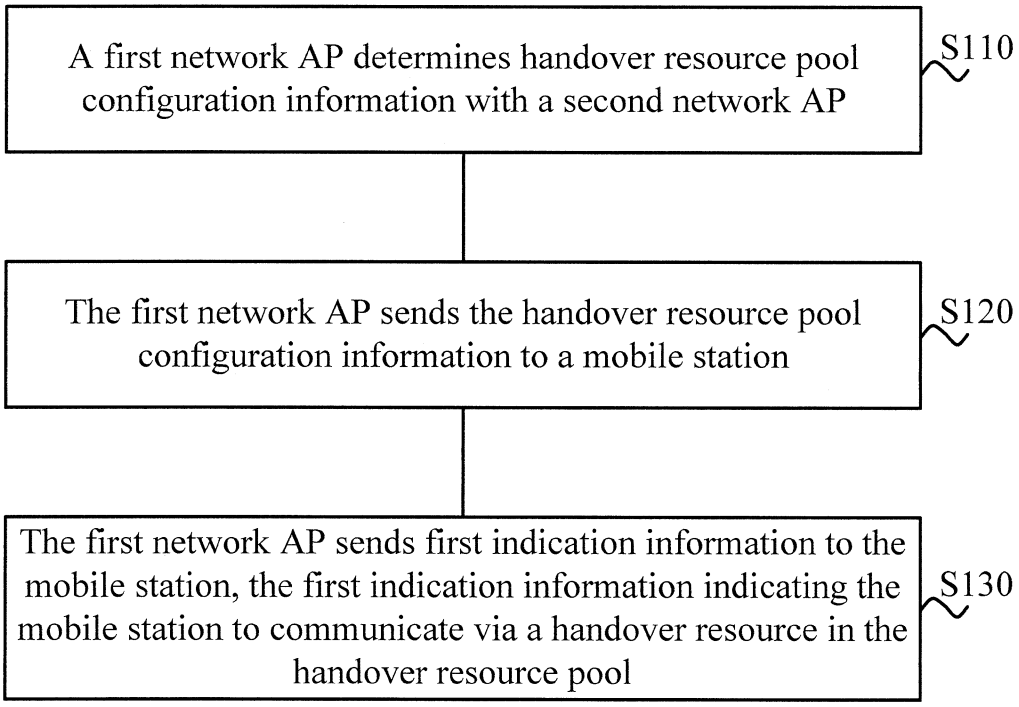
A first network AP determines handover resource pool configuration information with a second network AP
S110
The first network AP sends the handover resource pool configuration information to a mobile station
S120
The first network AP sends first indication information to the mobile station, the first indication information indicating the mobile station to communicate via a handover resource in the handover resource pool
S130

FIG. 2

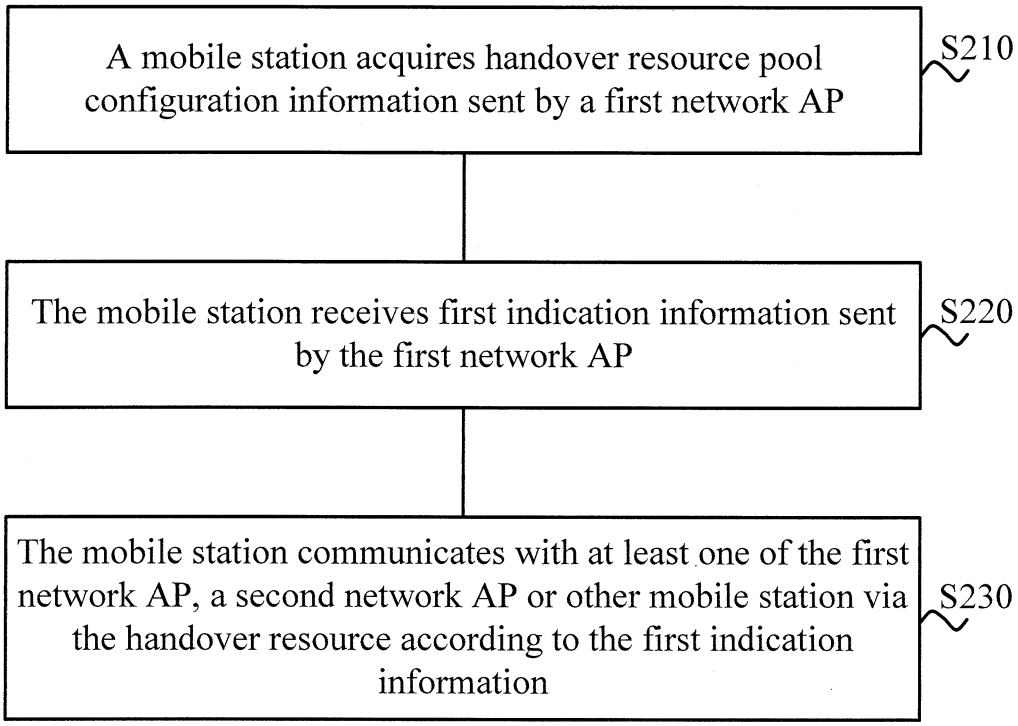
A mobile station acquires handover resource pool configuration information sent by a first network AP
S210
The mobile station receives first indication information sent by the first network AP
S220
The mobile station communicates with at least one of the first network AP, a second network AP or other mobile station via the handover resource according to the first indication information
S230

FIG. 3

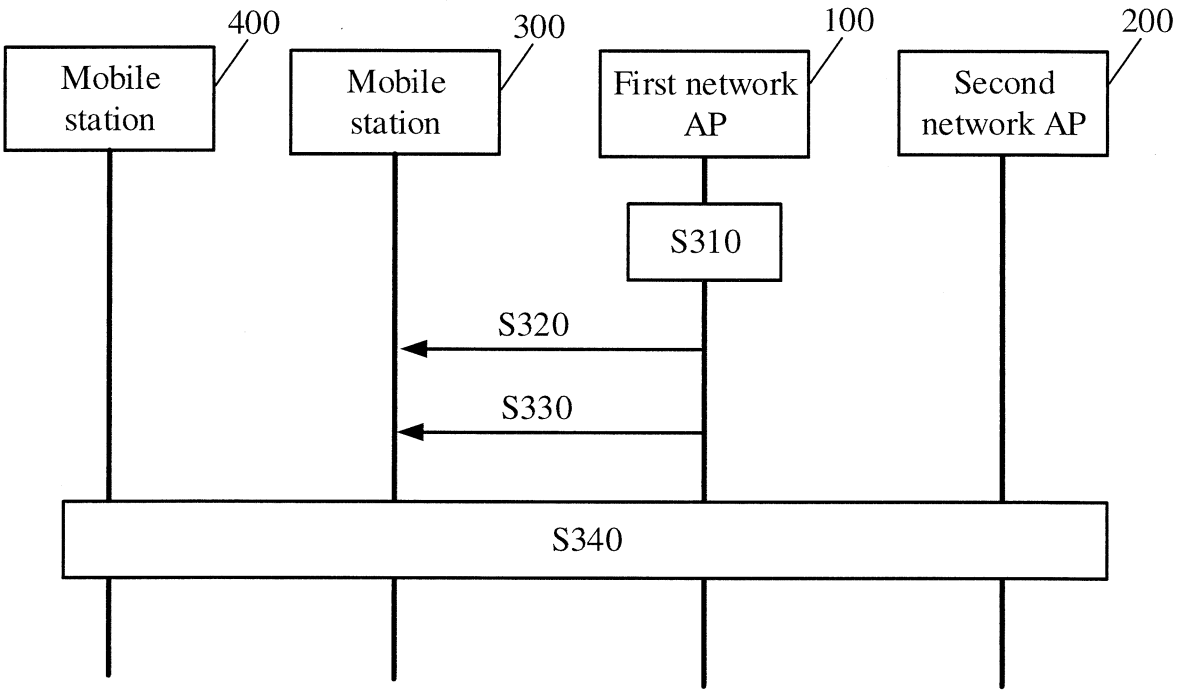
400
Mobile station
300
Mobile station
100
First network AP
200
Second network AP
S310
S320
S330
S340

FIG. 4

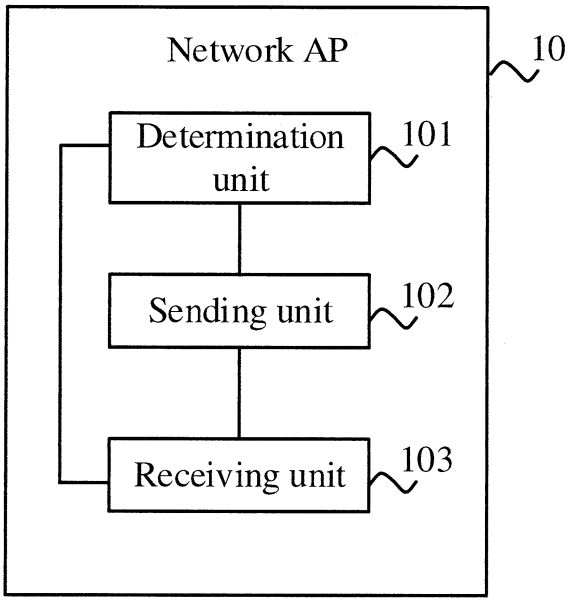
Network AP
10
Determination unit
101
Sending unit
102
Receiving unit
103

FIG. 5

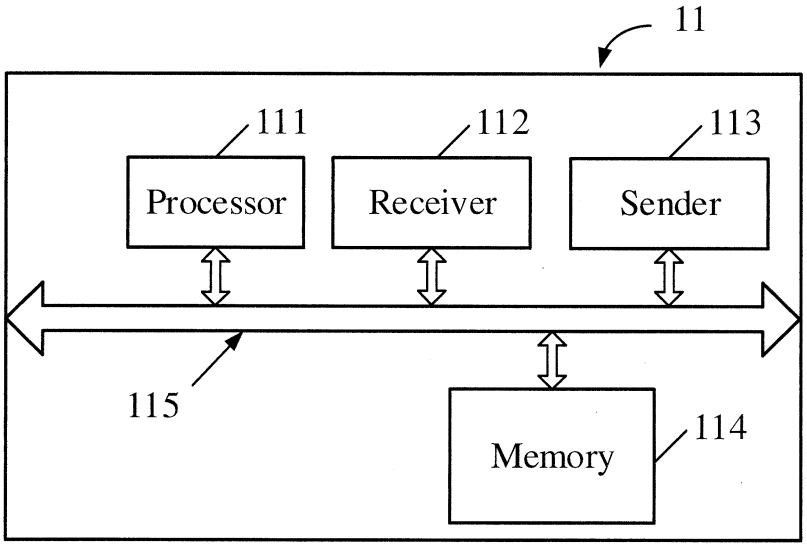
11
111
112
113
Processor
Receiver
Sender
115
Memory
114

FIG. 6

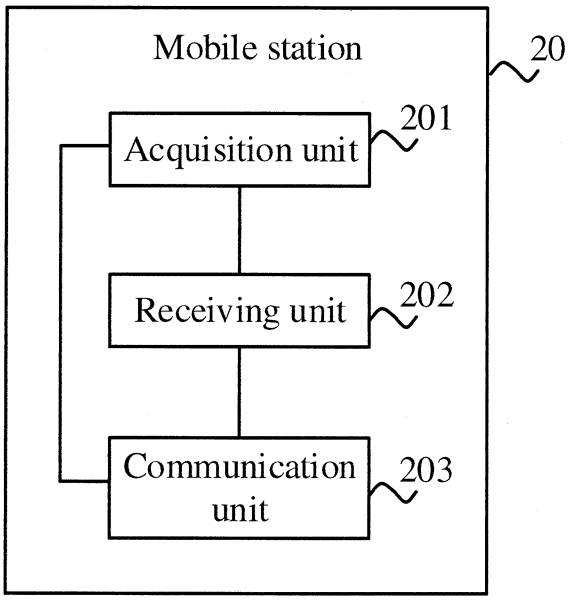
Mobile station
20
Acquisition unit
201
Receiving unit
202
Communication unit
203

FIG. 7

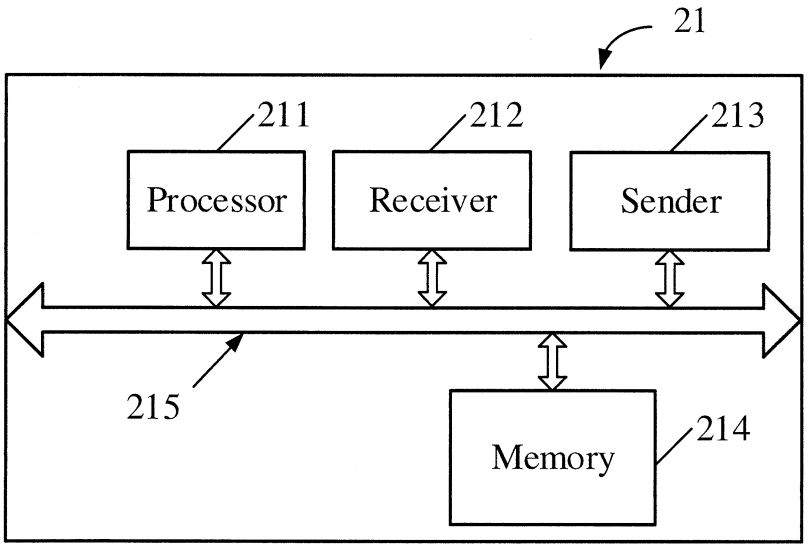
21
211
212
213
Processor
Receiver
Sender
215
Memory
214

FIG. 8