

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048239 A1

(51) International Patent Classification⁷: **B65H 29/56**

(21) International Application Number:
PCT/JP2003/014520

(22) International Filing Date:
14 November 2003 (14.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-341834 26 November 2002 (26.11.2002) JP
2002-341944 26 November 2002 (26.11.2002) JP
2002-342036 26 November 2002 (26.11.2002) JP
2003-023221 31 January 2003 (31.01.2003) JP

(71) Applicant (for all designated States except US): **RICOH COMPANY, LTD.** [JP/JP]; 3-6, Nakamagome 1-chome, Ohta-ku, Tokyo 143-8555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SAKUMA, Hideomi**

[JP/JP]; 5-8-414, Saiwaicho, Atsugi-shi, Kanagawa 243-0012 (JP). **IMOTO, Shinji** [JP/JP]; 8-11-304, Kinuta 1-chome, Setagaya-ku, Tokyo 157-0073 (JP). **ITO, Yohichi** [JP/JP]; 5-8-105, Saiwaicho, Atsugi-shi, Kanagawa 243-0012 (JP). **YASUDA, Hiroshi** [JP/JP]; 12, Izumigoumachi 4-chome, Toki-shi, Gifu 509-5147 (JP). **ISHII, Akira** [JP/JP]; 96-3, Hinomiyacho 2-chome, Nakamura-ku, Nagoya-shi, Aichi 453-0823 (JP).

(74) Agent: **ITO, TADAHIKO**; 32nd Floor, Yebisu Garden Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo 150-6032 (JP).


(81) Designated States (national): CN, KR, SG, US.

(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STABLY OPERABLE IMAGE-FORMING APPARATUS WITH IMPROVED PAPER CONVEYING AND EJECTING MECHANISM

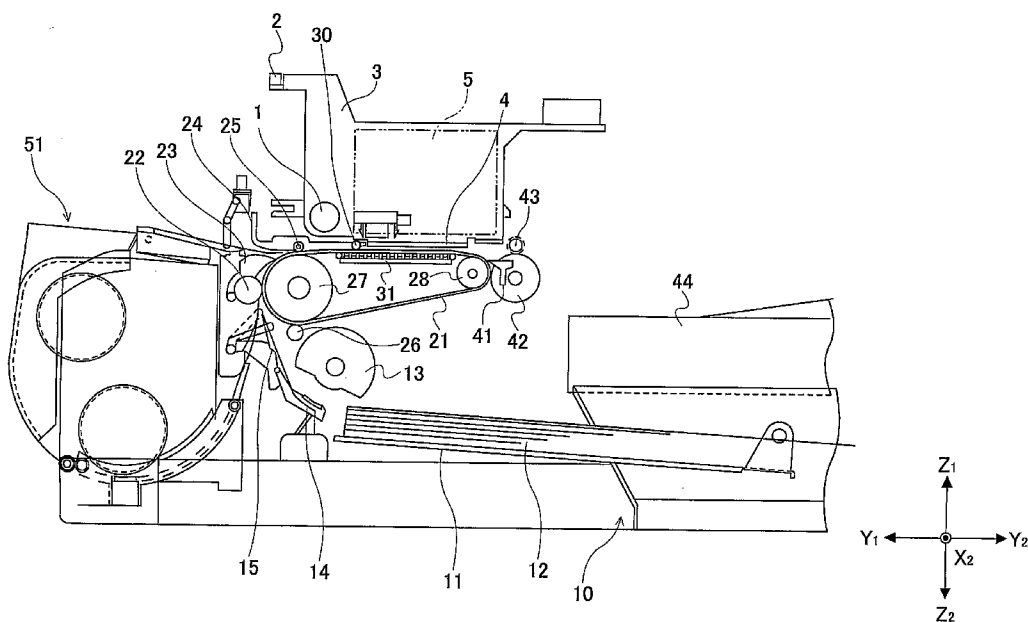

(57) Abstract: An image-forming apparatus includes an endless conveyor belt, a counter roller, and a clutch part. The endless conveyor belt is rotatable to convey paper with a surface of the conveyor belt being charged. The counter roller holds the paper between the conveyor belt and the counter roller and conveys the paper. The clutch part is caused to slip by the difference in velocity between the conveyor belt and the counter roller. The counter roller is driven through the clutch part.

WO 2004/048239 A1