

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
03 January 2019 (03.01.2019)



(10) International Publication Number
WO 2019/004909 A1

- (51) International Patent Classification:
H04L 5/00 (2006.01)
- (21) International Application Number:
PCT/SE2018/050685
- (22) International Filing Date:
26 June 2018 (26.06.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/524,900 26 June 2017 (26.06.2017) US
- (71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; SE-164 83 Stockholm (SE).
- (72) Inventors: **PARKVALL, Stefan**; Hermelinstigen 24, SE-167 57 BROMMA (SE). **DAHLMAN, Erik**; Scheel-egatan 3, SE-112 23 STOCKHOLM (SE). **LARSSON, Daniel**; Parternas Gränd 65, SE-226 47 LUND (SE).
- BALDEMAIR, Robert**; Honnörsgatan 16, SE-170 69 SOLNA (SE).
- (74) Agent: **BOU FAICAL, Roger**; Ericsson AB, Patent Unit Kista RAN 1, SE-164 80 STOCKHOLM (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: SIGNALING REFERENCE SIGNAL LOCATIONS IN SLOTS AND MINI-SLOTS

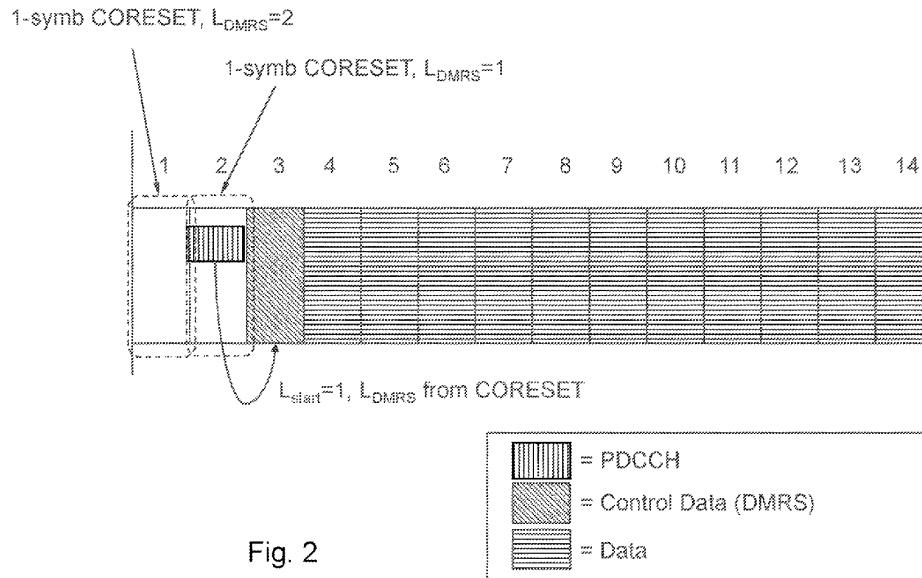


Fig. 2

(57) Abstract: According to some embodiments, a method for use in a wireless transmitter of a wireless communication network comprises providing control information relating to a slot. The control information includes an indication of whether the slot is of a first type or a second type. A slot of the first type starts at a slot interval boundary, and a slot of the second type either starts between slot interval boundaries and has arbitrary length or starts at a slot interval boundary and has reduced length. The control information includes an implicit or explicit reference signal timing indication if the slot is of the second type. The method further comprises transmitting the control information to a wireless receiver.

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*