

1

NOVEL (POLY)OXYALKYLENE BLOCK SILYL ESTER COPOLYMER,
ANTIFOULING COATING COMPOSITION, ANTIFOULING COATING
FORMED FROM ANTIFOULING COATING COMPOSITION,
ANTIFOULING METHOD USING ANTIFOULING COATING
5 COMPOSITION AND HULL OR UNDERWATER STRUCTURE COVERED
WITH ANTIFOULING COATING

TECHNICAL FIELD

The present invention relates to a novel
10 (poly)oxyalkylene block silyl ester copolymer. More
particularly, the present invention is concerned with a
(poly)oxyalkylene block silyl ester copolymer which,
when used as a vehicle of coating composition or paint,
enables forming a coating having excellent transparency
15 and being excellent in foul removing performance, i.e.,
capability of easily removing foul from a coating
surface.

BACKGROUND ART

20 Ship bottoms, underwater structures, fishing nets
and the like are likely to have their appearance and
function damaged by the adhesion to surface and
propagation of various aquatic organisms including
shellfishes such as oysters, hard-shelled mussels and
25 barnacles, plants such as laver (seaweeds) and bacteria

which is caused when they are exposed to water or seawater for a prolonged period of time.

In particular, when such an aquatic organism adheres to a ship's bottom and propagates, it may occur
5 that the surface roughness of the ship's bottom is increased to thereby lower the speed of the ship and increase the fuel consumed by the ship. Removing the aquatic organism from the ship bottom takes thousands of man-hours, so that many labors and much time are
10 needed for this work. Also, when bacteria adhere to, for example, an underwater structure and propagate and, further, slime (sludgy matter) adheres thereto to cause putrefaction, or when a large sticky organism adheres to the surface of an underwater structure of, for
15 example, steel and propagates to thereby damage the coating for corrosion prevention provided on the underwater structure, there is the danger that damages such as deterioration of the strength and function of the underwater structure and thus marked shortening of
20 the life thereof are invited.

In order to avoid the above damages, for example, an antifouling paint containing a copolymer of tributyltin methacrylate and methyl methacrylate or the like and cuprous oxide (Cu_2O) has been applied to ship
25 bottoms, etc. This copolymer of the antifouling paint

is hydrolyzed in the seawater to thereby liberate organotin compounds such as bistributyltin oxide (tributyltin ether of the formula $\text{Bu}_3\text{Sn}-\text{O}-\text{SnBu}_3$ wherein Bu is a butyl group) and tributyltin halides (Bu_3SnX wherein X is a halogen atom), so that an antifouling effect is exerted. Furthermore, the copolymer hydrolyzate per se has water-solubility and thus is dissolved in the seawater, as a result, no residue of hydrolyzate is left on the surface of the ship bottom coating, and then the new paint film surface in which the copolymer is not hydrolyzed is exposed to maintain the antifouling effect for long. The antifouling paint having such a performance is called as "hydrolyzable self-polishing paint".

15 However, the above organotin compounds are so highly toxic that apprehensions are being entertained with respect to marine pollution, occurrence of anomalous fish and anomalous shellfish and adverse effects on ecosystem through food chain. Therefore, the development of a nonstannic antifouling paint having excellent antifouling properties is desired as a substitute therefor.

For example, antifouling paints based on silyl esters as described in Japanese Patent Laid-open Publication Nos. 4(1992)-264170 (reference (1)),

4(1992)-264169 (reference (2)) and 4(1992)-264168 (reference (3)) can be mentioned as the above nonstannic antifouling paint. However, these antifouling paints have problems that not only are
5 their antifouling capabilities poor but also cracking and peeling are likely to occur as pointed out in Japanese Patent Laid-open Publication Nos. 6(1994)-157941 (reference (4)) and 6(1994)-157940 (reference (5)).

10 Further, Japanese Patent Laid-open Publication No. 2(1990)-196869 (reference (6)) teaches an antifouling paint comprising a blocked acid-functionality copolymer (A) which is obtained by copolymerizing trimethylsilyl methacrylate, ethyl methacrylate and methoxyethyl
15 acrylate in the presence of an azo initiator and which contains carboxyl groups blocked with trimethylsilyl groups and a polycationic compound (B). However, the coating film obtained from the antifouling paint has a drawback in that the cracking resistance thereof is not
20 fully satisfactory.

Published Japanese Translation of PCT Patent Applications from Other States, No. 60(1985)-500452 (reference (7)) and Japanese Patent Laid-open Publication No. 63(1988)-215780 describe a resin for
25 antifouling paint which is obtained by copolymerizing a


vinyl monomer having an organosilyl group, such as a trialkylsilyl ester of (meth)acrylic acid, with another vinyl monomer and which has a number average molecular weight of 3000 to 40,000. It is further described that the resin can be blended with an organic water binder such as trimethyl orthoformate, an antifouling agent such as cuprous oxide and a pigment such as red iron oxide. However, as described in the above Japanese Patent Laid-open Publication No. 6(1994)-157940 (reference (5)), this resin for antifouling paint has drawbacks in that it is likely to gelate during the storage thereof and that the coating film formed from the antifouling paint is poor in cracking and peeling resistances.

Japanese Patent Publication No. 5(1993)-32433 corresponding to the above Published Japanese Translation of PCT Patent Applications from Other States, No. 60(1985)-500452 (reference (7)) discloses an antifouling paint comprising a poison (a) and a polymer binder (b) having a repeating unit of the formula $(-\text{CH}_2-\text{CX}(\text{COOR})-(\text{B})-$ wherein X is H or CH_3 , R is SiR'_3 or $\text{Si}(\text{OR}')_3$ in which R' is an alkyl group, etc. and B is an ethylenically unsaturated monomer residue), which polymer binder has a specified hydrolysis rate.

Further, it is described that the antifouling paint can

contain a solvent, a water-sensitive pigment component,
 an inert pigment, a filler and a retarder. However,
 the coating film obtained from the antifouling paint
 described in the publication has a drawback in that its
 5 cracking resistance is poor.

Japanese Patent Laid-open Publication No. 7(1995)-
 18216 (reference (8)) discloses a coating composition
 comprising as principal components a polymer (A) from
 an organosilicon-containing monomer A having in its
 10 molecule a triorganosilicon ester group represented by
 the formula $-\text{COO}-\text{SiR}^1\text{R}^2\text{R}^3$ (wherein each of R^1 , R^2 and
 R^3 is, for example, an alkyl group having 1 to 18
 carbon atoms) and copper or a copper compound (B),
 which coating composition contains as an essential
 15 component other than the components (A) and (B) a
 silicon compound having an alkoxy group (C) represented
 by the formula:

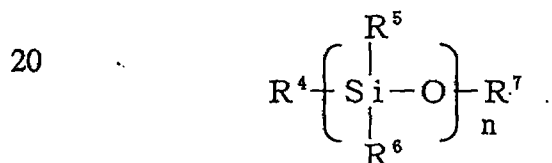

wherein each of R^4 , R^5 and R^6 represents, for
 25 example, a hydrogen atom, or an alkoxy group or
 cycloalkoxy group having 1 to 18 carbon atoms; R^7
 represents, for example, an alkyl group having 1 to 18

carbon atoms; and n is an integer of 1 to 3. In the publication, it is described that a copolymer AB obtained by copolymerizing the above organosilicon-containing monomer A and a vinyl monomer

5 copolymerizable therewith B may be contained in the coating composition. As the monomer B, there are mentioned (meth)acrylic esters such as methyl (meth)acrylate, ethyl (meth)acrylate and dimethylaminoethyl (meth)acrylate.

10 However, the coating film obtained from the coating composition described in the publication has a drawback in that it is inferior in cracking resistance and antifouling properties, in particular, antifouling properties in highly fouling environment. The
15 expression "in highly fouling environment" used herein means such situations that a ship or an underwater structure is allowed to stand still in a nutritious sea area such as an inland sea or other like sea area, or, with respect to a ship, service and anchorage are
20 repeated frequently or navigation is conducted at a speed as low as about 10 knots or less.

Japanese Patent Laid-open Publication No. 7(1995)-102193 (reference (9)) discloses a coating composition comprising as essential components an antifouling agent
25 and a copolymer obtained from a monomer mixture

containing monomer A represented by the formula $X-SiR^1R^2R^3$ (wherein R^1 , R^2 and R^3 all represent a group selected from among alkyl and aryl groups and may be identical with or different from each other, and X represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy or a fumaroyloxy group), and monomer B represented by the formula $Y-(CH_2CH_2O)_n-R^4$ (wherein R^4 represents an alkyl or an aryl group, Y represents an acryloyloxy or a methacryloyloxy group, and n is an integer of 1 to 25). As the antifouling agent, there are mentioned inorganic compounds such as cuprous oxide, copper powder and other copper compounds, zinc sulfate and zinc oxide, and further mentioned organometallic compounds such as oxine copper and other organocopper compounds, organonickel compounds, and zinc pyrithione and other organozinc compounds. However, there is no suggestion on a polymer having a (poly)oxyalkylene block structure and containing an organosilyl ester group in the publication, and, further, the paint described in the publication has a problem of being inferior in antifouling properties, in particular, antifouling properties in highly fouling environment.

Japanese Patent Laid-open Publication No. 8(1996)-199095 (reference (10)) discloses a coating composition comprising as essential components an antifouling agent

and a copolymer obtained from a monomer mixture containing the above monomer A represented by the formula $X-SiR^1R^2R^3$ described in Japanese Patent Laid-open Publication No. 7(1995)-102193 and monomer B represented by the formula $Y-(CH(R^4))-(OR^5)$ (wherein R^4 represents an alkyl group; R^5 represents an alkyl or a cycloalkyl group; and Y represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy or a fumaroyloxy group), optionally together with a vinyl monomer C copolymerizable with the monomers A and B. As the vinyl monomer C, there are mentioned, for example, acrylic esters, methacrylic esters, styrene and vinyl acetate. Moreover, as the antifouling agent, there are mentioned inorganic compounds such as cuprous oxide, copper powder and other copper compounds, zinc sulfate and zinc oxide, and further mentioned organometallic compounds such as oxine copper and other organocopper compounds, organonickel compounds, and zinc pyrithione and other organozinc compounds.

Japanese Patent Laid-open Publication No. 8(1996)-269388 (reference (11)) discloses a coating composition comprising, as essential components, bis(2-pyridinethiol-1-oxide) copper salt (copper pyrithione) and a copolymer obtained from a monomer mixture containing monomer A represented by the formula X-

$\text{SiR}^1\text{R}^2\text{R}^3$ (wherein R^1 , R^2 and R^3 all represent a hydrocarbon group having 1 to 20 carbon atoms and may be identical with or different from each other, and X represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy, a fumaroyloxy or an itaconoyloxy group), and monomer B represented by the formula $\text{Y}-(\text{CH}_2\text{CH}_2\text{O})_n-\text{R}^4$ (wherein R^4 represents an alkyl or an aryl group; Y represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy, a fumaroyloxy or an itaconoyloxy group; and n is an integer of 1 to 25). For example, dimethyl-t-butylsilyl acrylate is mentioned as the monomer A. As the antifouling agent, there are mentioned inorganic compounds such as cuprous oxide, copper powder and other copper compounds, zinc sulfate and zinc oxide, and further mentioned organometallic compounds such as oxine copper and other organocopper compounds, organonickel compounds, and zinc pyrithione and other organozinc compounds. Furthermore, for example, rosin and rosin derivatives are mentioned as a leaching rate regulator which can be added to the coating composition.

Japanese Patent Laid-open Publication No. 8(1996)-269389 (reference (12)) discloses a coating composition comprising an antifouling agent and a copolymer copolymerized a monomer mixture containing an

unsaturated monomer A having a triorganosilyl group and a monomer B represented by any of the following formulae.

The monomer B can be:

5 monomer having a tertiary amino group, represented by the formula $\text{CH}_2=\text{CR}^4\text{COOR}^5\text{-NR}^6\text{R}^7$ (wherein R^4 represents H or CH_3 ; R^5 represents an alkylene group; and R^6 and R^7 represent alkyl groups and may be identical with or different from each other),

10 monomer containing a quaternary ammonium salt, represented by the formula $\text{CH}_2=\text{CR}^8\text{COOR}^9\text{-NR}^{10}\text{R}^{11}\text{R}^{12}(\text{Y})$ (wherein R^8 represents H or CH_3 ; R^9 represents an alkylene group; R^{10} to R^{12} represent alkyl groups and may be identical with or different from each other; and
15 Y represents a halogen atom),

monomer containing a nitrogenous heterocycle, represented by the formula $\text{CH}_2=\text{CH-Z}$ (wherein Z represents a group comprising a nitrogenous heterocycle),


20 monomer having in its molecule an alkoxy group or an aryloxyalkylene glycol group, represented by the formula $\text{CH}_2=\text{CR}^{13}\text{COO}(\text{R}^{14}\text{O})_m(\text{R}^{15}\text{O})_n(\text{R}^{16}\text{O})_o\text{-R}^{17}$ (wherein R^{13} represents H or CH_3 ; R^{14} represents an ethylene group; R^{15} represents an alkylene group having 3 carbon
25 atoms; R^{16} represents an alkylene group having 4 carbon

atoms; R^{17} represents an alkyl group or aryl group; and each of m , n and o is an integer of 0 or greater, provided that n and o are not simultaneously 0),

(meth)acrylamide represented by the formula
 5 $CH_2=CR^{18}CONR^{19}R^{20}$ (wherein R^{18} represents H or CH_3 ; and R^{19} and R^{20} represent alkyl groups and may be identical with or different from each other),

(meth)acrylamide having a nitrogenous cyclic hydrocarbon group, represented by the formula
 10 $CH_2=CR^{21}CON()Q$ (wherein R^{21} represents H or CH_3 ; and $N()Q$ is a nitrogen-containing nitrogen group wherein, for example, O, N or S may be contained in Q),

(meth)acrylic ester containing a furan ring, represented by the formula $CH_2=CR^{23}COOCH_2-T$ (wherein
 15 R^{23} represents H or CH_3 ; and T represents a furan ring or a tetrahydrofuran ring), or



Further, as an optional component copolymerizable with the above monomers A and B, there are mentioned
 20 various copolymerizable monomers such as acrylic acid, ethyl acrylate, 2-hydroxyethyl (meth)acrylate and 2-hydroxypropyl (meth)acrylate.

In the Example portion, there are mentioned, for example, a copolymer from tri-n-butylsilyl acrylate
 25 (TBSA), diethylaminoethyl methacrylate (DEAEMA) and

methyl methacrylate (MMA) and a copolymer from tri-n-butylsilyl acrylate (TBSA), N,N-dimethylacrylamide (DMAA) and methyl methacrylate (MMA). However, there is no suggestion on a copolymer having a

5 (poly)oxyalkylene block structure and containing an organosilyl ester group in the publication.

Still further, as a component which can be added to the coating composition, there are mentioned the same antifouling agents as described in the above

10 Japanese Patent Laid-open Publication No. 8(1996)-269388.

Japanese Patent Laid-open Publication No. 8(1996)-269390 (reference (13)) discloses a coating composition comprising:

15 a polymer from monomer A represented by the formula $X-SiR^1R^2R^3$ (wherein R^1 , R^2 and R^3 all represent groups selected from among alkyl and aryl groups and may be identical with or different from each other, and X represents an acryloyloxy, a methacryloyloxy, a

20 maleinoyloxy, a fumaroyloxy or an itaconoyloxy group),

a polymer from monomer B represented by the formula $Y-(CH_2CH_2O)_n-R^4$ (wherein R^4 represents an alkyl or an aryl group; Y represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy, a fumaroyloxy or an

itaconoyloxy group; and n is an integer of 1 to 25),
and

an antifouling agent. As the antifouling agent,
there are mentioned the same antifouling agents as
5 described in the above Japanese Patent Laid-open
Publication No. 8(1996)-269388. Further, as a
component which can be added to the coating composition,
there are mentioned, for example, resins such as rosin
and antisetting agents.

10 Japanese Patent Laid-open Publication No. 8(1996)-
277372 (reference (14)) discloses a coating composition
comprising a triphenylboron pyridine complex and a
copolymer from a monomer mixture containing the monomer
A represented by the formula $X-SiR^1R^2R^3$ described in
15 the above Japanese Patent Laid-open Publication No.
8(1996)-269388 (reference (11)) and the monomer B
represented by the formula $Y-(CH_2CH_2O)_n-R^4$ described in
the same reference, and further comprising a resin
component and a marine organism adhesion inhibitor
20 which consist only of a nonmetallic polymer and a
nonmetallic organic inhibitor, respectively. Further,
for example, rosin and rosin derivatives are mentioned
as a leaching rate regulator which can be added to the
coating composition.

Japanese Patent Laid-open Publication No.

10(1998)-30071 (reference (15)) discloses a coating composition comprising at least one rosin compound (A) consisting of rosin, a rosin derivative or a rosin metal salt, a polymer having an organosilyl ester group (B) consisting of a polymer from at least one monomer M represented by the formula $X-SiR^1R^2R^3$ (wherein R^1 , R^2 and R^3 all represent groups selected from among alkyl and aryl groups and may be identical with or different from each other, and X represents an acryloyloxy, a methacryloyloxy, a maleinoyloxy, a fumaroyloxy, an itaconoyloxy or a citraconoyloxy group), and/or a polymer from the above at least one monomer M and at least one other polymerizable monomer, and an antifouling agent (C). Further, as another monomer acting as an optional component copolymerizable with the above monomer M, there are mentioned, for example, acrylic acid, methyl acrylate, 2-hydroxyethyl (meth)acrylate and 2-hydroxypropyl (meth)acrylate. However, there is no suggestion on a copolymer having a (poly)oxyalkylene block structure and containing an organosilyl ester group in the publication.

As the antifouling agent, there are mentioned the same antifouling agents as described in the above Japanese Patent Laid-open Publication No. 8(1996)-

269388. Further, as a component which can be added to the coating composition, there are mentioned, for example, pigments, chlorinated paraffin and antisetting agents.

5 However, in these references (9) to (15), there is no suggestion on a copolymer having a (poly)oxyalkylene block structure and containing an organosilyl ester group. Further, with the use of coating compositions described in these references, the obtained coating
10 film is either poor in cracking resistance, or unsatisfactory from the viewpoint of a balance of cracking resistance, peeling resistance (coating adherence), antifouling performance or antifouling properties, in particular, antifouling properties in
15 highly fouling environment, long-term antifouling properties and self-polishing properties.

Further, for example, 2-hydroxyethyl acrylate and 2-hydroxypropyl acrylate are mentioned as a copolymerizable optional component in Japanese Patent
20 Publication No. 5(1993)-82865 (reference (16)). Still further, silyl (meth)acrylate copolymers are described in Japanese Patent Laid-open Publication No. 9(1997)-
48947 (reference (17)), Japanese Patent Laid-open Publication No. 9(1997)-48948 (reference (18)),
25 Japanese Patent Laid-open Publication No. 9(1997)-48949

(reference (19)), Japanese Patent Laid-open Publication No. 9(1997)-48950 (reference (20)), Japanese Patent Laid-open Publication No. 9(1997)-48951 (reference (21)), Japanese Patent Publication No. 5(1993)-32433 (reference (22)), U.S.P. No. 4,593,055 (reference (23)), Japanese Patent Laid-open Publication No. 2(1990)-1968669 (reference (24)) and WO 91/14743 (reference (25)). However, in these references (16) to (25), there is no suggestion on a copolymer having a (poly)oxyalkylene block structure and containing an organosilyl ester group. Further, with the use of antifouling paints based on copolymers described in these references (16) to (25), the obtained coating film is either poor in cracking resistance, or has room for further improvement from the viewpoint of a balance of cracking resistance, peeling resistance (coating film adherence), antifouling performance or antifouling properties, in particular, antifouling properties in highly fouling environment, long-term antifouling properties and self-polishing properties.

Japanese Patent Laid-open Publication No. 63(1988)-215780 (reference (26)) describes copolymers formed using, for example, methyl methacrylate, n-butyl methacrylate and acrylamide as copolymerization components, and further describes antifouling paints

containing the above copolymers and cuprous oxide.

These antifouling paints have the same drawbacks as those of the antifouling paints of the above references.

WO 96/03465 (reference (27)) describes star-type
5 polymers obtained using tri- to octa-functional
mercapto compounds. It is described that these
polymers have such a low viscosity as to enable
preparation of a paint of high solid content, and that
the tendency thereof toward viscosity increase or
10 gelation during storage is low. Moreover, the use of
an unsaturated carboxylic acid silyl ester as a monomer
is described in the WO 96/03465. However, there is no
suggestion on a copolymer having an organosilyl ester
group, which copolymer has such a block structure as,
15 like a (poly)oxyalkylene, has hydrophilicity and can
improve the antifouling performance of antifouling
paint, and at least an AB type or ABA type block
copolymer is not taught at all in the reference.

20

OBJECT OF THE INVENTION

The present invention has been made with a view
toward solving the above problems of the prior art. It
is an object of the present invention to provide a
copolymer for antifouling paint which enables forming
25 such an antifouling coating film as exhibits less

cracking tendency, excellent adherence so as to ensure
less peeling tendency and desirably controlled
hydrolysis rate so as to be extremely excellent in
antifouling properties in highly fouling environment
5 and long-term antifouling properties as antifouling
performance (antifouling activity). It is another
object of the present invention to provide an
antifouling coating composition which can form an
antifouling coating film exhibiting less cracking
10 tendency, excellent adherence so as to ensure less
peeling tendency and desirably controlled hydrolysis
rate so as to be extremely excellent in antifouling
properties in highly fouling environment and long-term
antifouling properties.

15 It is further objects of the present invention to
provide an antifouling coating film formed from the
above antifouling coating composition, to provide an
antifouling method effected with the use of the above
antifouling coating composition, and to provide a hull
20 or underwater structure covered with the above
antifouling coating film.

DISCLOSURE OF THE INVENTION


The (poly)oxyalkylene block silyl ester copolymer of the present invention comprises silyl ester copolymer block units (A) and block units (B),

the silyl ester copolymer block units (A) comprising:


(a) component units derived from a polymerizable unsaturated carboxylic acid silyl ester, and

(b) polymerizable unsaturated monomer units other than the component units (a),

the block units (B) derived from a mercapto compound represented by the formula:




15 , or

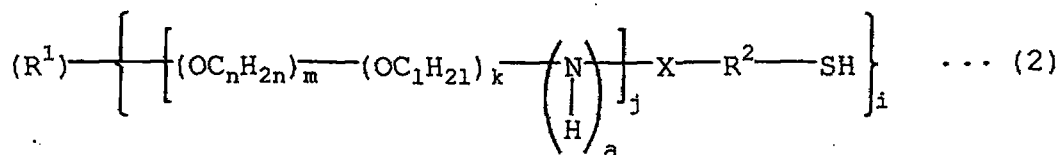

wherein R^1 represents a hydrocarbon group or ether-bond-containing hydrocarbon group having a valency of 1 or higher and having 1 to 30 carbon atoms; R^2 represents a bivalent hydrocarbon group having 1 to 30 carbon atoms or a group of the formula $-CH(R^3)-$


wherein R^3 represents a group of the formula R^4-O-R^5 ; R^4 representing a bivalent hydrocarbon group having 1 to 30 carbon atoms, and R^5 representing a monovalent hydrocarbon group having 1 to 30 carbon atoms; X

5 represents:



10 ; n is
an integer of 1 to 5; m is an integer of 1 to 100; l is an integer of 1 to 5; k is an integer of 0 to 100; a is an integer of 0 or 1; j is an integer of 1 to 50; and i is the valency of R^1 .

15 The component units derived from a polymerizable unsaturated carboxylic acid silyl ester (a) preferably contain component units (a-1) derived from a silyl (meth)acrylate of the formula:




20 wherein R represents a hydrogen atom or a methyl group; and R^a , R^b and R^c may be identical with or different from each other and each represent a linear alkyl group, a branched alkyl group, a cycloalkyl group, a substituted or unsubstituted phenyl group or a
25 trimethylsilyloxy group.

In the formula (I), it is preferred that at least one of the R^a , R^b and R^c represent a branched alkyl group or a cycloalkyl group.


Also, the component units derived from a
5 polymerizable unsaturated carboxylic acid silyl ester
(a) preferably comprise:

silyl (meth)acrylate component units (a-2) of the formula:



10 wherein R represents a hydrogen atom or a methyl group; each of R^{11} and R^{12} independently represents a linear alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted phenyl group, or a trimethylsilyloxy group; and R^{13} represents an alkyl
15 group having 1 to 18 carbon atoms which may have a ring structure or branch, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group, and

silyl (meth)acrylate component units (a-3) of the
20 formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{14} and R^{15} independently represents a branched alkyl or cycloalkyl group having 3 to 10
25 carbon atoms; and R^{16} represents a linear alkyl group

having 1 to 10 carbon atoms, a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group.

5 It is preferred that the polymerizable unsaturated monomer units (b) other than the component units (a) comprise component units (b-1) derived from an acrylic unsaturated monomer containing a polar group.

 Preferably, the component units (b-1) derived from
10 an acrylic unsaturated monomer containing a polar group have component units derived from an acrylic unsaturated monomer containing at least one polar group selected from the group consisting of a hydroxyl group, a hydroxyalkyl group, an alkoxyl group, a
15 polyoxyalkylene group, an alkylpolyoxyalkylene group, an amino group, an N-substituted amino group, an amido group, an N-substituted amido group, an epoxy group, an oxolane group, an oxetane group, an oxirane group, a tetrahydrofurfuryl group and a morpholino group.

20 The use of the above (poly)oxyalkylene block silyl ester copolymer according to the present invention as a vehicle of antifouling paint enables providing an antifouling coating composition which enables forming such an antifouling coating film exhibiting less
25 cracking tendency, excellent adherence so as to ensure

less peeling tendency and desirably controlled:
 hydrolysis rate so as to be extremely excellent in
 antifouling properties in highly fouling environment
 and long-term antifouling properties, which antifouling
 5 coating film is further excellent in a balance of these
 properties.

The antifouling coating composition of the present
 invention comprises a (poly)oxyalkylene block silyl
 ester copolymer, the (poly)oxyalkylene block silyl
 10 ester copolymer comprising silyl ester copolymer block
 units (A-1) and block units (A-2),


the silyl ester copolymer block units (A-1)
 comprising:

(a) component units derived from a polymerizable
 15 unsaturated carboxylic acid silyl ester, and


(b) polymerizable unsaturated monomer units other
 than the component units (a),

the block units (A-2) derived from a mercapto
 compound represented by the formula:


20



, or

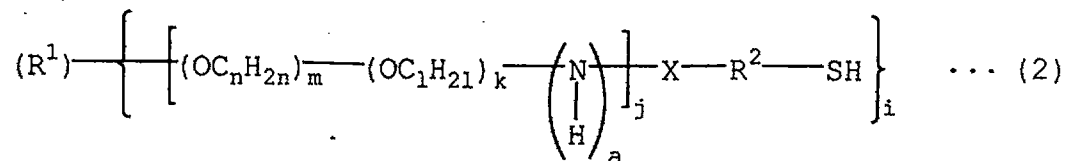

wherein R^1 represents a hydrocarbon group or
 5 ether-bond-containing hydrocarbon group having a
 valency of 1 or higher and having 1 to 30 carbon atoms;
 R^2 represents a bivalent hydrocarbon group having 1 to
 30 carbon atoms or a group of the formula $-CH(R^3)-$
 wherein R^3 represents a group of the formula R^4-O-R^5 ,
 10 R^4 representing a bivalent hydrocarbon group having 1
 to 30 carbon atoms, and R^5 representing a monovalent
 hydrocarbon group having 1 to 30 carbon atoms; X
 represents:




; n is

an integer of 1 to 5; m is an integer of 1 to 100; l is
 20 an integer of 1 to 5; k is an integer of 0 to 100; a is
 an integer of 0 or 1; j is an integer of 1 to 50; and i
 is the valency of R^1 .

The component units derived from a polymerizable
 unsaturated carboxylic acid silyl ester (a) preferably

contain component units (a-1) derived from a silyl :
(meth)acrylate of the formula:




wherein R represents a hydrogen atom or a methyl
5 group; and R^{a} , R^{b} and R^{c} may be identical with or
different from each other and each represent a linear
alkyl group, a branched alkyl group, a cycloalkyl group,
a substituted or unsubstituted phenyl group or a
trimethylsilyloxy group.

10 In the formula (I), it is preferred that at least
one of the R^{a} , R^{b} and R^{c} represent a branched alkyl
group or a cycloalkyl group.

Also, the component units derived from a
polymerizable unsaturated carboxylic acid silyl ester

15 (a) preferably comprise:


silyl (meth)acrylate component units (a-2) of the
formula:



wherein R represents a hydrogen atom or a methyl
20 group; each of R^{11} and R^{12} independently represents a
linear alkyl group having 1 to 10 carbon atoms, a
substituted or unsubstituted phenyl group, or a
trimethylsilyloxy group; and R^{13} represents an alkyl
group having 1 to 18 carbon atoms which may have a ring
25 structure or branch, a substituted or unsubstituted

phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group, and

silyl (meth)acrylate component units (a-3) of the formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{14} and R^{15} independently represents a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms; and R^{16} represents a linear alkyl group
 10 having 1 to 10 carbon atoms, a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group.

Preferably, the polymerizable unsaturated monomer
 15 units (b) other than the component units (a) comprise component units (b-1) derived from an acrylic unsaturated monomer containing a polar group.

It is preferred that the component units (b-1) derived from an acrylic unsaturated monomer containing
 20 a polar group have at least one polar group selected from the group consisting of a hydroxyl group, a hydroxyalkyl group, an alkoxyl group, a polyoxyalkylene group, an alkylpolyoxyalkylene group, an amino group, an N-substituted amino group, an amido group, an N-
 25 substituted amido group, an epoxy group, an oxolane

group, an oxetane group, an oxirane group, a tetrahydrofurfuryl group and a morpholino group.

The antifouling coating composition of the present invention preferably further comprises an antifouling agent (B).

Also, the antifouling coating composition of the present invention preferably further comprises zinc oxide (C).

Moreover, it is preferred that the antifouling coating composition of the present invention further comprise an inorganic dehydrating agent (D).

It is also preferred that the antifouling coating composition of the present invention further comprise a leaching accelerating component (E).

The antifouling coating film of the present invention is formed from the above antifouling coating composition of the present invention.

The method of rendering antifouling a marine vessel, an underwater structure, a fishing gear or a fishing net according to the present invention comprises applying the above antifouling coating composition of the present invention to a base surface of a marine vessel, an underwater structure, a fishing gear or a fishing net and drying the applied

antifouling coating composition so that a formed antifouling coating film covers the base surface.

The marine vessel, underwater structure, fishing gear or fishing net according to the present invention
5 has a surface covered with the above antifouling coating film formed from the antifouling coating composition of the present invention.

According to the present invention, there is provided an antifouling coating composition which,
10 because of the containing of specified (poly)oxyalkylene block silyl ester copolymer, enables forming such an antifouling coating film as exhibits less cracking tendency, excellent adherence so as to ensure less peeling tendency and desirably controlled
15 hydrolysis rate so as to be excellent in antifouling performance (antifouling activity), antifouling properties, in particular, antifouling properties in highly fouling environment and long-term antifouling properties, which antifouling coating film is further
20 excellent in a balance of these properties.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 is a GPC chromatogram of silyl ester copolymer BP-1.

Fig. 2 is an IR spectral chart of silyl ester
25 copolymer BP-1.

Fig. 3 is a GPC chromatogram of silyl ester copolymer BP-2.

Fig. 4 is an IR spectral chart of silyl ester copolymer BP-2.

5 Fig. 5 is a GPC chromatogram of silyl ester copolymer BP-3.

Fig. 6 is an IR spectral chart of silyl ester copolymer BP-3.

10 Fig. 7 is a GPC chromatogram of silyl ester copolymer BP-4.

Fig. 8 is an IR spectral chart of silyl ester copolymer BP-4.

Fig. 9 is a GPC chromatogram of silyl ester copolymer BP-5.

15 Fig. 10 is an IR spectral chart of silyl ester copolymer BP-5.

Fig. 11 is a GPC chromatogram of silyl ester copolymer BP-6.

20 Fig. 12 is an IR spectral chart of silyl ester copolymer BP-6.

Fig. 13 is a GPC chromatogram of silyl ester copolymer BP-7.

Fig. 14 is an IR spectral chart of silyl ester copolymer BP-7.

Fig. 15 is a GPC chromatogram of silyl ester copolymer BP-8.

Fig. 16 is an IR spectral chart of silyl ester copolymer BP-8.

5 Fig. 17 is a GPC chromatogram of silyl ester copolymer BP-9.

Fig. 18 is an IR spectral chart of silyl ester copolymer BP-9.

10 Fig. 19 is a GPC chromatogram of silyl ester copolymer BP-10.

Fig. 20 is an IR spectral chart of silyl ester copolymer BP-10.

Fig. 21 is a GPC chromatogram of silyl ester copolymer BP-11.

15 Fig. 22 is an IR spectral chart of silyl ester copolymer BP-11.

Fig. 23 is a GPC chromatogram of silyl ester copolymer BP-12.

20 Fig. 24 is an IR spectral chart of silyl ester copolymer BP-12.

Fig. 25 is a GPC chromatogram of silyl ester copolymer BP-13.

Fig. 26 is an IR spectral chart of silyl ester copolymer BP-13.

BEST MODE FOR CARRYING OUT THE INVENTION

The (poly)oxyalkylene block silyl ester copolymer and antifouling coating composition according to the present invention will be described in detail below.

5

(poly)oxyalkylene block silyl ester copolymer

The (poly)oxyalkylene block silyl ester copolymer of the present invention is a block copolymer comprising silyl ester copolymer block units (A) and

10 block units (B),

the silyl ester copolymer block units (A) comprising:

(a) component units derived from a polymerizable unsaturated carboxylic acid silyl ester, and

15 (b) polymerizable unsaturated monomer units other than the component units (a),

the block units (B) derived from a specified mercapto compound.

With respect to the (poly)oxyalkylene block silyl ester copolymer, the terminology "(poly)oxyalkylene" means that an oxyalkylene or a polyoxyalkylene is contained in the silyl ester copolymer.

20

Silyl ester copolymer block unit (A)

First, the component units (a) and (b) for constituting the silyl ester copolymer block units (A) will be described.


Component unit derived from polymerizable unsaturated

5 carboxylic acid silyl ester (a)

As the polymerizable unsaturated carboxylic acid silyl ester, there can be mentioned, for example, silyl esters of unsaturated monocarboxylic acids such as acrylic acid and methacrylic acid, α,β -unsaturated
10 dicarboxylic acids such as itaconic acid, maleic acid, fumaric acid and citraconic dibasic acid, and unsaturated monocarboxylic acids having the structure of a half ester of α,β -unsaturated dicarboxylic acid.

Among the component units derived from such a
15 polymerizable unsaturated carboxylic acid silyl ester, component units (a-1) derived from silyl (meth)acrylate are preferred.

These component units (a-1) derived from silyl (meth)acrylate are, for example, represented by the
20 formula:



wherein R represents a hydrogen atom or a methyl group; and R^a , R^b and R^c may be identical with or different from each other and each represent a linear
25 alkyl group, a branched alkyl group, a cycloalkyl group,

a substituted or unsubstituted phenyl group or a trimethylsilyloxy group. The above linear alkyl group preferably 1 to 18 carbon atoms, still preferably 1 to 6 carbon atoms. Each of the branched alkyl group and cycloalkyl group preferably has 3 to 10 carbon atoms, still preferably 3 to 8 carbon atoms. As the substituent which can replace a hydrogen atom of the phenyl group, there can be mentioned, for example, an alkyl, an aryl and a halogen. The substituted or unsubstituted phenyl group has 6 to 18 carbon atoms, preferably 6 to 12 carbon atoms.

The silyl (meth)acrylate (a-1) from which the above silyl (meth)acrylate component units can be derived can be represented by the formula:

15



20

wherein R, like R of the above formula (I), represents a hydrogen atom or a methyl group; and R^a , R^b and R^c , like R^a , R^b and R^c of the above formula (I), may be identical with or different from each other and each represent a linear alkyl group, a branched alkyl group, a cycloalkyl group, a substituted or unsubstituted phenyl group or a trimethylsilyloxy group.

25

For example, the above silyl (meth)acrylate (a-1) can be:

silyl (meth)acrylate wherein R^a , R^b and R^c are identical with each other, such as trimethylsilyl (meth)acrylate, triethylsilyl (meth)acrylate, tripropylsilyl (meth)acrylate, triisopropylsilyl (meth)acrylate, tributylsilyl (meth)acrylate, tri-sec-butylsilyl (meth)acrylate or triisobutylsilyl (meth)acrylate, or


silyl (meth)acrylate wherein R^a , R^b and R^c are partially or wholly different from each other, such as di-sec-butyl-methylsilyl (meth)acrylate, sec-butyl-dimethylsilyl (meth)acrylate, dimethylpropylsilyl (meth)acrylate, monomethyldipropylsilyl (meth)acrylate or methylethylpropylsilyl (meth)acrylate.

The use of the copolymer containing these silyl (meth)acrylate component units (a-1) as a vehicle of antifouling paint enables forming an antifouling coating film which is excellent in not only self-polishing properties (consumability) but also long-term antifouling performance. Wherein "self-polishing" of copolymer means that the copolymer hydrolyzate per se has water-solubility and is dissolved in seawater, a new copolymer which has not been hydrolyzed yet is exposed.

In the present invention, it is preferred that at least one of the R^a , R^b and R^c of the component units (a-1) derived from silyl (meth)acrylate represented by the above formula (I) represent a branched alkyl group or a cycloalkyl group. The use of the component having a branched alkyl group or a cycloalkyl group as a vehicle of antifouling paint enables forming an antifouling coating film which is excellent in cracking resistance and peeling resistance.


Also, the component units derived from a polymerizable unsaturated carboxylic acid silyl ester (a) preferably comprise:

silyl (meth)acrylate component units (a-2) of the formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{11} and R^{12} independently represents a linear alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted phenyl group, or a trimethylsilyloxy group; and R^{13} represents an alkyl group having 1 to 18 carbon atoms which may have a ring structure or a branch, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group, and

silyl (meth)acrylate component units (a-3) of the formula:




wherein R represents a hydrogen atom or a methyl group; each of R^{14} and R^{15} independently represents a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms; and R^{16} represents a linear alkyl group having 1 to 10 carbon atoms, a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group.

These component units will now be described.

Silyl (meth)acrylate component unit (a-2)

The silyl (meth)acrylate component unit (a-2) is represented by the formula:



wherein R represents a hydrogen atom or a methyl group, and each of R^{11} and R^{12} independently represents a linear alkyl group having 1 to 10 carbon atoms, preferably 1 to 8 carbon atoms, and still preferably 1 to 6 carbon atoms, a substituted or unsubstituted phenyl group, or a trimethylsilyloxy group. As the linear alkyl group, there can be mentioned, for example, methyl, ethyl, n-propyl, n-butyl, n-pentyl, n-hexyl, n-heptyl, n-octyl, n-nonyl and n-decyl groups.

As the substituent which can replace a hydrogen atom of the phenyl group, there can be mentioned, for example, an alkyl, an aryl and a halogen.

R^{13} represents an alkyl group having 1 to 18
5 carbon atoms, preferably 1 to 12 carbon atoms, and
still preferably 1 to 9 carbon atoms, which may have a
ring structure or a branch, a substituted or
unsubstituted phenyl group having 6 to 10 carbon atoms,
preferably 6 to 8 carbon atoms, or a trimethylsilyloxy
10 group of the formula $(CH_3)_3SiO-$.


The alkyl group which constitutes R^{13} can be any
of the above exemplified linear alkyl groups, and
further can be:

branched alkyl group such as isopropyl, isobutyl,
15 sec-butyl, tert-butyl or neopentyl,

alicyclic alkyl group having an alicyclic
structure (e.g., cyclohexane ring or norbornane ring),
such as cyclohexyl or ethylidenenorbornyl,
or the like.

20 Of these, R^{11} , R^{12} and R^{13} , although may be
identical with or different from each other, preferably
each represent methyl, ethyl, n-propyl, n-butyl, n-
hexyl or trimethylsilyloxy, and still preferably each
represent methyl, n-propyl, n-butyl or n-hexyl.

The silyl (meth)acrylate (a-2) from which the above silyl (meth)acrylate component units (a-2) can be derived can be represented by the formula:



5 wherein R is the same as the R of the above formula (II), and R^{11} , R^{12} and R^{13} are the same as the R^{11} , R^{12} and R^{13} of the above formula (II).

For example, the silyl (meth)acrylate (a-2) can be any of:

10 aliphatic silyl (meth)acrylates wherein R^{11} , R^{12} and R^{13} are identical with each other, such as:

trimethylsilyl (meth)acrylate,

triethylsilyl (meth)acrylate,

tri-n-propylsilyl (meth)acrylate,

15 tri-n-butylsilyl (meth)acrylate,

tri-n-pentylsilyl (meth)acrylate,

tri-n-hexylsilyl (meth)acrylate,

tri-n-heptylsilyl (meth)acrylate,

tri-n-octylsilyl (meth)acrylate,

20 tri-n-nonylsilyl (meth)acrylate, and

tri-n-decylsilyl (meth)acrylate,

aromatic or siloxane silyl (meth)acrylates wherein R^{11} , R^{12} and R^{13} are identical with each other, such as:

triphenylsilyl (meth)acrylate, and

25 tris(trimethylsilyloxy)silyl (meth)acrylate, and

aliphatic silyl (meth)acrylates wherein R^{11} , R^{12} and R^{13} are partially or wholly different from each other, such as:

- dimethyl-n-propylsilyl (meth)acrylate,
 5 isopropyldimethylsilyl (meth)acrylate,
 di-n-butyl-isobutylsilyl (meth)acrylate,
 n-hexyl-dimethylsilyl (meth)acrylate,
 sec-butyl-dimethylsilyl (meth)acrylate,
 monomethyldi-n-propylsilyl (meth)acrylate,
 10 methylethyl-n-propylsilyl (meth)acrylate,
 ethylidenenorbornyl-dimethylsilyl (meth)acrylate,


and

- trimethylsilyloxy-dimethylsilyl (meth)acrylate
 $(CH_2=C(CH_3)COOSi(CH_3)_2(OSi(CH_3)_3))$ and
 15 $CH_2=CHCOOSi(CH_3)_2(OSi(CH_3)_3))$.

These silyl (meth)acrylates (a-2) can be used individually or in combination.

Silyl (meth)acrylate component unit (a-3)

- The silyl (meth)acrylate component units (a-3) are
 20 represented by the formula:



- wherein R represents a hydrogen atom or a methyl group, and each of R^{14} and R^{15} independently represents a branched alkyl group having 3 to 10 carbon atoms,
 25 preferably 3 to 8 carbon atoms, or a cycloalkyl group

having 3 to 10 carbon atoms, preferably 3 to 9 carbon atoms.

The branched alkyl group, like that of the above formula (II), can be, for example, any of isopropyl, isobutyl, sec-butyl, tert-butyl and neopentyl.

The cycloalkyl group can be, for example, cyclohexyl or ethylidenenorbornyl.


R^{16} represents a linear alkyl group having 1 to 10 carbon atoms, preferably 1 to 8 carbon atoms, and still preferably 1 to 6 carbon atoms; a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, preferably 3 to 9 carbon atoms; a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, preferably 6 to 8 carbon atoms; or a trimethylsilyloxy group.

As the linear alkyl group, branched alkyl or cycloalkyl group and phenyl group represented by R^{16} , there can be mentioned, for example, the same specific groups as listed above.

Of these, when R^{14} , R^{15} and R^{16} , although may be identical with or different from each other, are identical with each other, it is preferred that isopropyl, sec-butyl or isobutyl be represented thereby. It is especially preferred that isopropyl or sec-butyl be represented thereby.

When R^{14} , R^{15} and R^{16} are partially or wholly different from each other, it is preferred that R^{14} and R^{15} , although may be identical with or different from each other, represent isopropyl, isobutyl, sec-butyl or
 5 tert-butyl. It is preferred that R^{16} represent a group selected from among methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl and trimethylsilyloxy.

The silyl (meth)acrylate (a-3) from which the above silyl (meth)acrylate component units (a-3) can be
 10 derived can be represented by the formula:



wherein R, R^{14} , R^{15} and R^{16} are the same as the R, R^{14} , R^{15} and R^{16} of the above formula (III).

The silyl (meth)acrylate (a-3) can be, for example,
 15 any of:

silyl (meth)acrylates wherein R^{14} , R^{15} and R^{16} are identical with each other, such as:

triisopropylsilyl (meth)acrylate,

triisobutylsilyl (meth)acrylate, and

20 tri-sec-butylsilyl (meth)acrylate, and

silyl (meth)acrylates wherein R^{14} , R^{15} and R^{16} are partially or wholly different from each other, such as:

diisopropyl-cyclohexylsilyl (meth)acrylate,

diisopropyl-phenylsilyl (meth)acrylate,

25 diisopropyl-trimethylsiloxy-silyl (meth)acrylate,

di-sec-butyl-methylsilyl (meth)acrylate,
di-sec-butyl-ethylsilyl (meth)acrylate,
di-sec-butyl-trimethylsilyloxysilyl (meth)acrylate,
and

5 isopropyl-sec-butyl-methylsilyl (meth)acrylate.

In the present invention, these silyl
(meth)acrylates (a-3) can be used individually or in
combination.

Among the above silyl (meth)acrylate component
10 units, the following combination is especially
preferred from the viewpoint of easiness in the
synthesis of silyl ester copolymer block units (A-1)
and from the viewpoint of the film forming property,
storage stability and easy control of consumability of
15 an antifouling coating composition comprising the block
copolymer containing silyl ester copolymer block units
(A-1).

Preferred use is made of a combination of a
component unit derived from at least one silyl
20 (meth)acrylate (a-2) selected from among:

trimethylsilyl (meth)acrylate,
triethylsilyl (meth)acrylate,
tri-n-propylsilyl (meth)acrylate,
tri-n-butylsilyl (meth)acrylate,
25 n-hexyl-dimethylsilyl (meth)acrylate,

n-octyl-dimethylsilyl (meth)acrylate,
 isopropyl-dimethylsilyl (meth)acrylate,
 ethylidenenorbornyl-dimethylsilyl (meth)acrylate,
 trimethylsilyloxy-dimethylsilyl (meth)acrylate,
 5 bis(trimethylsilyloxy)-methylsilyl (meth)acrylate,
 and

tris(trimethylsilyloxy)silyl (meth)acrylate, with
 a component unit derived from at least one silyl
 (meth)acrylate (a-3) selected from among:

10 triisopropylsilyl (meth)acrylate,
 triisobutylsilyl (meth)acrylate,
 tri-sec-butylsilyl (meth)acrylate,
 di-sec-butyl-methylsilyl (meth)acrylate,
 diisopropyl-trimethylsilyloxysilyl (meth)acrylate,

15 and

di-sec-butyl-trimethylsilyloxysilyl (meth)acrylate.

Still preferred use is made of a combination of a
 component unit derived from tri-n-butylsilyl
 (meth)acrylate as a silyl (meth)acrylate (a-2) with a
 20 component unit derived from triisopropylsilyl
 (meth)acrylate as a silyl (meth)acrylate (a-3).

Unsaturated monomer component unit (b)

The unsaturated monomer component unit (b) is used
 25 to constitute the silyl (meth)acrylate copolymer block

unit in cooperation with the above component unit (a) derived from polymerizable unsaturated carboxylic acid silyl ester and is a component unit which is different from the component unit (a) derived from polymerizable
5 unsaturated carboxylic acid silyl ester.

The unsaturated monomer from which this unsaturated monomer component unit (b) can be derived can be, for example, any of:

hydrophobic (meth)acrylates such as methyl
10 (meth)acrylate, ethyl (meth)acrylate, n-butyl (meth)acrylate, iso-butyl (meth)acrylate or tert-butyl (meth)acrylate, 2-ethylhexyl (meth)acrylate and cyclohexyl (meth)acrylate;

hydrophilic (meth)acrylates such as 2-hydroxyethyl
15 (meth)acrylate, 2-hydroxypropyl (meth)acrylate, 2-hydroxybutyl (meth)acrylate, 4-hydroxybutyl (meth)acrylate, 2-methoxyethyl (meth)acrylate, methylpolyoxyethylene (meth)acrylate and methylpolyoxypropylene (meth)acrylate;

20 styrenes such as styrene, vinyltoluene and α -methylstyrene;

vinyl esters such as vinyl acetate, vinyl benzoate, vinyl propionate and vinyl butyrate; and

crotonic acid esters, itaconates, fumarate and
25 maleates.


Of these, (meth)acrylates, styrenes and vinyl esters are preferred from the viewpoint that an antifouling coating film of appropriate strength can be obtained.

5 In particular, when hydrophilic (meth)acrylates are employed, the consumability of coating film can be increased. For this purpose, also, use can be made of a hydrophilic comonomer such as an acrylamide derivative.

10 Moreover, in the present invention, component units (b-1) derived from an acrylic unsaturated monomer having a polar group are suitable for use as the unsaturated monomer component units (b).

As the polar group of the component units (b-1),
15 there can preferably be employed at least one group selected from the group consisting of hydroxyl, hydroxyalkyl, alkoxyl, polyoxyalkylene, alkylpolyoxyalkylene, amino, N-substituted amino, amido, N-substituted amido, epoxy, oxirane, oxolane, oxetane,
20 tetrahydrofurfuryl and morpholino groups.


The above component units (b-1) derived from an acrylic unsaturated monomer having a polar group are represented by, for example, the formula:

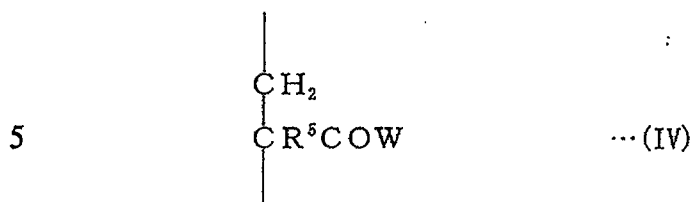


wherein R^5 represents a hydrogen atom or a methyl
 10 group; and W represents a polar group.

The polar group W is represented by the formula
 ZR^6 wherein Z represents an oxygen atom or $-\text{NR}^7$.

When Z is an oxygen atom, R^6 represents a
 substituted or unsubstituted hydroxyalkyl or
 15 hydroxycycloalkyl group, or a polyalkylene glycol group
 of the formula:



20 (wherein R^8 represents an alkylene group; n is an
 integer of 2 to 50; x is an integer of 1 to 100; and R^y
 represents an alkyl group), or an epoxy or oxetane
 group of the formulae:

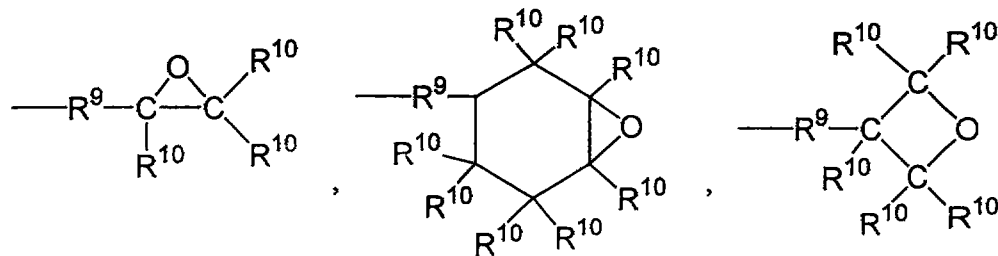

(wherein R^9 represents an alkylene group of 1 to 10 carbon atoms having or not having an ether bond; and R^{10} s may be identical with or different from each other and each represent H or an alkyl group having 1 to 5 carbon atoms; provided that R^{10} s bonded to neighboring carbon atoms may be bonded with each other to thereby form a ring structure).

In the above formula (IV), the hydroxyalkyl group preferably has 1 to 18 carbon atoms, still preferably 2 to 9 carbon atoms. The hydroxycycloalkyl group preferably has 3 to 10 carbon atoms, still preferably 3 to 8 carbon atoms. The alkylene group R^8 has 1 to 8 carbon atoms, preferably 2 to 4 carbon atoms. The substituent of the hydroxyalkyl group or hydroxycycloalkyl group can preferably be a halogen atom such as a chlorine atom, a phenyl group or a hydroxyl group.

When Z is $-NR^7$, R^7 represents an alkyl group having carbon atoms as mentioned above, which may be substituted with any of a halogen, a hydroxyl group, an amino group, a substituted amino group, an acyl group and an alkoxyl group. R^6 represents a hydrogen atom.

The copolymer containing the above unsaturated monomer component units having a polar group (b-1), when employed as a vehicle of antifouling paint,

realizes excellent antifouling performance especially in highly fouling sea area.

The unsaturated monomer (b-1) from which the unsaturated monomer component units having a polar group (b-1) can be derived can be represented by the formula:




wherein R^5 and W are the same as those defined in the formula (IV), namely, W is ZR^6 .


The unsaturated monomer (IV-a), when, in the formula (IV-a), Z represents an oxygen atom and R^6 represents a substituted or unsubstituted hydroxyalkyl or hydroxycycloalkyl group, or polyalkylene glycol group, can be, for example, any of 2-hydroxyethyl acrylate, 2-hydroxyethyl methacrylate, 2-hydroxypropyl acrylate, 2-hydroxypropyl methacrylate, 3-chloro-2-hydroxypropyl methacrylate, 3-phenoxy-2-hydroxypropyl acrylate, 4-hydroxybutyl acrylate, 2-hydroxybutyl acrylate, 2-hydroxybutyl methacrylate, 6-hydroxyhexyl acrylate, 1,4-cyclohexanedimethanol monoacrylate, polyethylene glycol monomethacrylate ($n=2$), polyethylene glycol monomethacrylate ($n=4$), polyethylene glycol monomethacrylate ($n=5$),

- polyethylene glycol monomethacrylate (n=8),
 polyethylene glycol monomethacrylate (n=10),
 polyethylene glycol monomethacrylate (n=15),
 polypropylene glycol monomethacrylate (n=5),
 5 polypropylene glycol monomethacrylate (n=9),
 polypropylene glycol monomethacrylate (n=12), 2-
 methoxyethyl acrylate, 3-butoxypropyl methacrylate and
 methoxypolyethylene glycol monomethacrylate (n=35).


When Z is an oxygen atom, the unsaturated monomer
 10 (IV-a) having an epoxy group or an oxetane group can be,
 for example, any of:

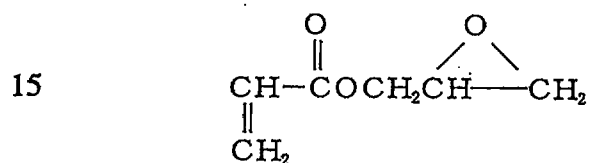

(glycidyl acrylate),
 20

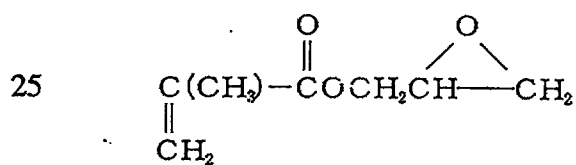


(glycidyl methacrylate) ,
 30

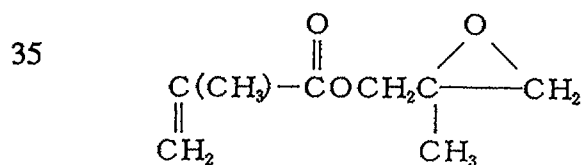

(methylglycidyl methacrylate),
 40


5

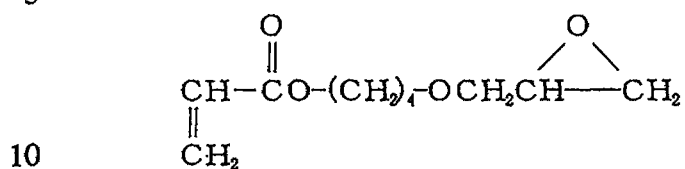

10

(4-hydroxybutyl acrylate glycidyl ether),


15

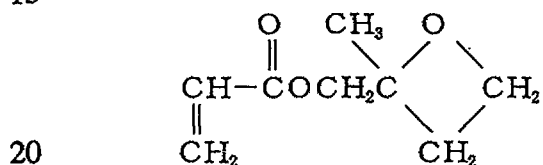

20

(3-acryloxymethyl-3-methyloxetane),


25

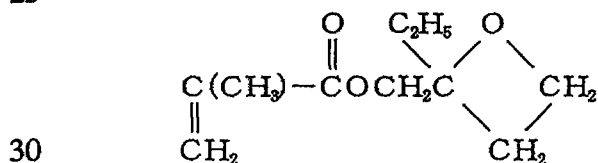

30


(3-methacryloxymethyl-3-ethyloxetane),

35



(3,4-epoxycyclohexylmethyl methacrylate), and

40



(3,4-epoxycyclohexylmethyl acrylate).

The unsaturated monomer, when, in the formula (IV-a), Z represents $-NR^7$, can be, for example, any of N-methylolacrylamide, N-methoxymethylacrylamide, N-

5 ethoxymethylacrylamide, N,N-dimethylaminopropylacrylamide, N,N-dimethylaminopropylmethacrylamide and diacetoneacrylamide.

The above unsaturated monomers can be used
10 individually or in combination.


These unsaturated monomers (b) can be used individually or in combination.

From the viewpoint of prevention of coating film cracking and from the viewpoint of the peeling
15 resistance, strength and consumability of coating film, it is preferred that the silyl ester copolymer block units (A) contain the component units (a) derived from a polymerizable unsaturated carboxylic acid silyl ester in an amount of 10 to 95% by weight, especially 20 to
20 85% by weight, and contain the unsaturated monomer component units (b) other than the component units (a) in an amount of 5 to 90% by weight, especially 15 to 80% by weight (provided that component units (a) + component units (b) = 100% by weight). When the silyl
25 (meth)acrylate component units (a-2) and (a-3) are


contained as the component units: (a) derived from a polymerizable unsaturated carboxylic acid silyl ester, it is preferred that the silyl (meth)acrylate component units (a-2) be contained in an amount of 0.1 to 60% by weight, especially 0.5 to 40% by weight, while the silyl (meth)acrylate component units (a-3) be contained in an amount of 10 to 70% by weight, especially 30 to 65% by weight (provided that the amount of component units (a-2) + (a-3) falls within the above range of amount of component units (a)).

Block unit derived from mercapto compound (B)

The block units (B) are derived from a mercapto compound represented by the formula:

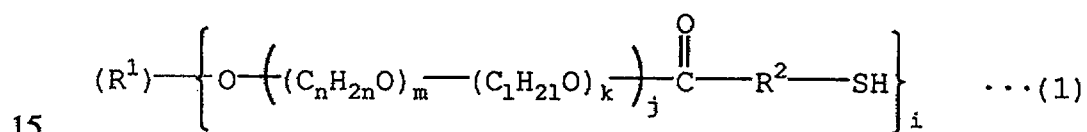


, or

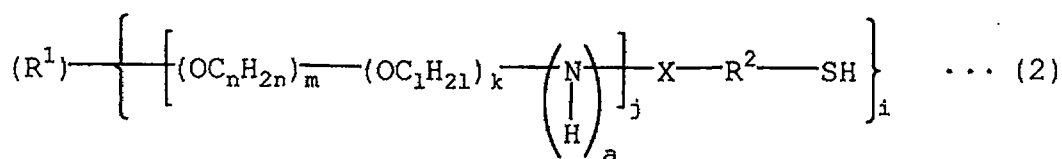


wherein R^1 represents a hydrocarbon group or ether-bond-containing hydrocarbon group having a valency of 1 or higher and having 1 to 30 carbon atoms, preferably 1 to 20 carbon atoms. The group R^1 may be

an aliphatic hydrocarbon group, an alicyclic hydrocarbon group or an aromatic aliphatic hydrocarbon group unsubstituted or substituted with an alkyl group. When the valency of R^1 is 2 or higher, only one carbon atom as a constituent of R^1 may be bonded with a plurality of oxygen atom bonding groups (-O-), or a plurality of carbon atoms as constituents of the hydrocarbon group may be respectively bonded with oxygen atom bonding groups. For example, R^1 may be represented by the formula:

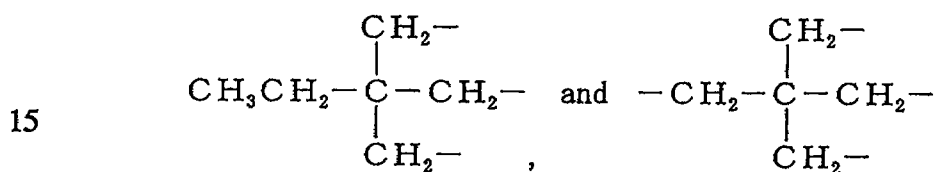

R^2 represents a bivalent hydrocarbon group having 1 to 30 carbon atoms, preferably 1 to 20 carbon atoms, or a group of the formula $-\text{CH}(R^3)-$ wherein R^3 represents a group of the formula $R^4-\text{O}-R^5$ in which R^4 represents a bivalent hydrocarbon group having 1 to 30 carbon atoms, preferably 1 to 10 carbon atoms, while R^5 represents a monovalent hydrocarbon group having 1 to 30 carbon atoms, preferably 1 to 20 carbon atoms.

X represents:



n is an integer of 1 to 5, preferably 1 to 4.

m is an integer of 1 to 100, preferably 1 to 60.














l is an integer of 1 to 5; k is an integer of 0 to 5
100; a is an integer of 0 or 1; j is an integer of 1 to 50; and i is the valency of R^1 .





When two or more different types of alkylene oxide chains (OC_nH_{2n}) exist in the mercapto compound,

alkylene oxide chains of the same type may form a block,

10 or the two or more different types of alkylene oxide chains $(OC_nH_{2n})_m$ may be arranged randomly, in the mercapto compound.

This mercapto compound can be, for example, any of:

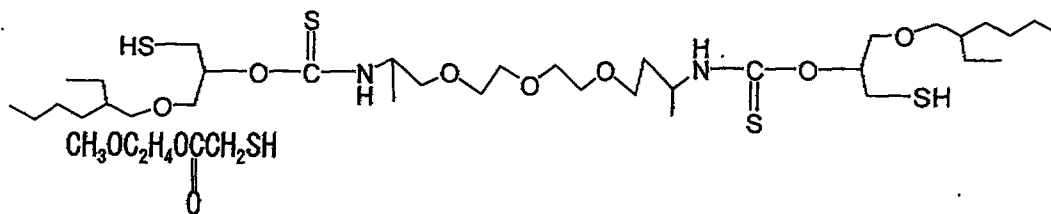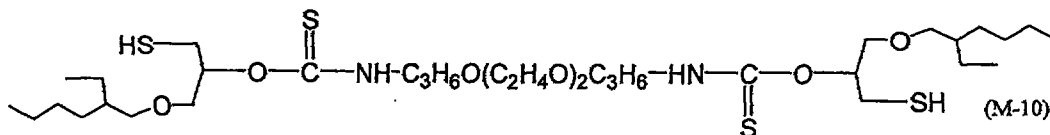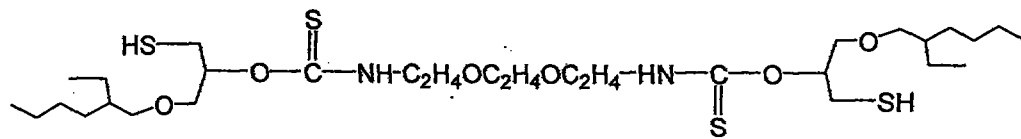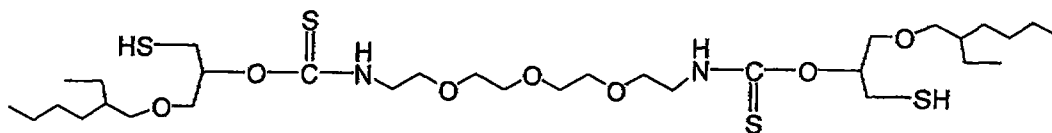

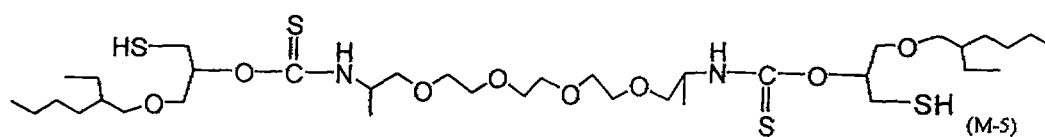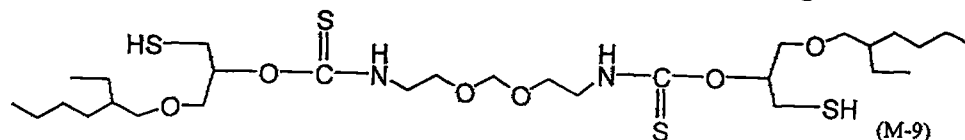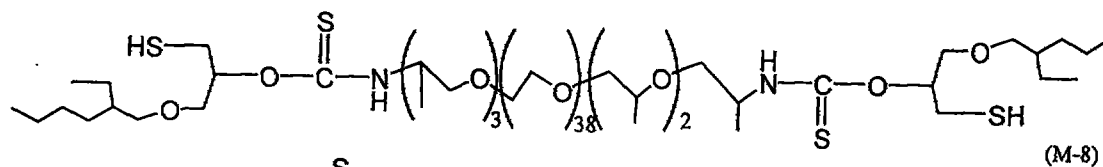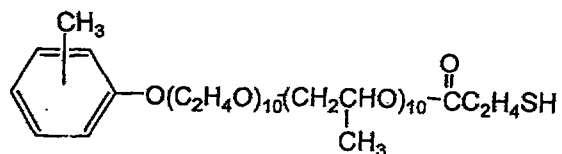

Among the above mercapto compounds, those of the formulae (M-1) to (M-12) are employed in Examples described later.

It is preferred that the number average molecular weight of these mercapto compounds be in the range of 100 to 10,000, especially 150 to 8000, and still especially 150 to 5000.

When the block units derived from these mercapto compounds are contained, there can be obtained a block copolymer having advantageous properties such that an excellent surface renewability is exhibited in the event of the use of the block copolymer as a vehicle of antifouling paint. The expression "excellent surface renewability" means that, in the surface renewal, while undergoing consumption, of the self-polishing antifouling paint coating film, the thickness of a porous layer (known as "skeleton layer") which is the outermost surface layer constituted of traces of leaching of antifouling agent is small, so that a highly active coating surface is constantly exposed.

The (poly)oxyalkylene block silyl ester copolymer produced using the above mercapto compound is characterized by having a low molecular weight as compared with those of customary silyl ester copolymers

to thereby cause the viscosity of its solution to be low.

Therefore, the antifouling coating composition comprising the (poly)oxyalkylene block silyl ester
5 copolymer according to the present invention enables minimizing the use of solvent, thereby having advantageous properties such that the workability at coating operation is excellent.

In the (poly)oxyalkylene block silyl ester
10 copolymer A for use in the present invention, the above component units (A) and/or (B) may be present each in a single type or in combination of at least two types.

In the (poly)oxyalkylene block silyl ester copolymer of the present invention, it is preferred
15 that, providing that the sum of component units (A) and (B) is 100% by weight, the amount of silyl ester copolymer block units (A) be generally in the range of 40 to 99.9% by weight, especially 50 to 99.5% by weight, and still especially 70 to 99% by weight, while the
20 amount of block units (B) constituted of the mercapto compound be generally in the range of 0.1 to 60% by weight, especially 0.5 to 50% by weight, and still especially 1 to 30% by weight.

When the amount of mercapto compound block units
25 (B) is in the above ranges, the coating film tends to

exhibit excellent antifouling properties and renewability, and also tends to be excellent in hardness, wear and other properties.

When the mercapto compound from which the
5 component units (B) for constituting the
(poly)oxyalkylene block silyl ester copolymer can be
derived is a compound having one "SH" (compound of the
above formula (1) or (2) wherein i is 1), it is
presumed that, in the copolymer, one component unit (B)
10 would exist in one end portion of the copolymer so as
to seal one end of the component unit (A) (namely, A-B
type, see the following formula).


Further, for example, when the mercapto compound
from which the component units (B) can be derived is a
15 compound having one "SH" at each of both ends thereof
(compound of the above formula (1) or (2) wherein i is
2), it is presumed that, in the copolymer, one end of
component unit (A) would be bonded with component unit
(B), whose other end would further be bonded with one
20 end of other component unit (A) (namely, A-B-A type,
see the following formula).

In addition to these block copolymers, there would
be a block copolymer wherein chain end portions of
three or more component units (A) are bonded with three

or more S elements of component unit (B), known as star type arrangement (see the following formula).

In the present invention, the A-B-A type and the star type are preferred as the (poly)oxyalkylene block silyl ester copolymer.

A-B type




10

A-B-A type



Star type

15

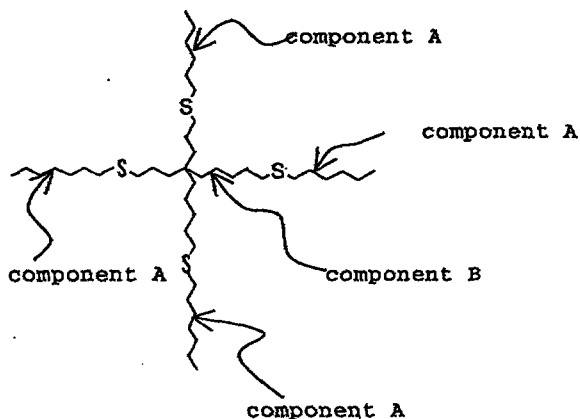

20

With respect to these block copolymers, from the viewpoint of coatability of a composition containing the copolymer and antisagging properties exhibited when dilution is effected with a solvent, it is preferred that the viscosity of, for example, a solution of 50% concentration at 25°C, although varied depending on the

use of employed copolymer and not unconditionally determined, be generally in the range of 5 to 200,000 (200 thousand) cps, especially 10 to 50,000 (50 thousand) cps.

5 With respect to these block copolymers, it is preferred that the weight average molecular weight thereof be in the range of 500 to 200 thousand, especially 1000 to 100 thousand, and still especially 1500 to 80 thousand.

10 These (poly)oxyalkylene block silyl ester copolymers A can be produced by performing a block copolymerization of the above silyl ester copolymer component and the above mercapto compound.

 The process for producing (poly)oxyalkylene block
15 silyl ester copolymers will be described below.

Process for producing (poly)oxyalkylene block silyl ester copolymer

 In the production of (poly)oxyalkylene block silyl
20 ester copolymer, a block copolymerization is performed while causing the mercapto compound (B) to be present in polymerization conditions of silyl ester copolymer component (A).

 Specifically, use is made of the above
25 polymerizable unsaturated carboxylic acid silyl ester

(a) and the unsaturated monomer (b) other than the polymerizable unsaturated carboxylic acid silyl ester which are constituents of the silyl ester copolymer component (A). Based on the amount of silyl ester copolymer component (A), the polymerizable unsaturated carboxylic acid silyl ester (a) is used in an amount of 10 to 95% by weight, preferably 20 to 85% by weight, and the unsaturated monomer (b) is used in an amount of 5 to 90% by weight, preferably 15 to 80% by weight (providing that $(a) + (b) = 100\%$ by weight). The mercapto compound (B) is used in an amount of 0.1 to 60% by weight, preferably 0.5 to 50% by weight, based on the amount of (poly)oxyalkylene block silyl ester copolymer. A block polymerization thereof is carried out through various common techniques, such as solution polymerization, bulk polymerization, emulsion polymerization and suspension polymerization, in the presence of a radical polymerization initiator.


The block polymer obtained through such polymerization techniques generally comprises random-copolymerized silyl ester copolymer component (A) chains and (poly)oxyalkylene block chains.

Conventional azo compounds and peroxides can widely be used as the radical polymerization initiator. Examples of the azo compounds include 2,2'-

azobisisobutyronitrile, 2,2'-azobis(2-methylbutyronitrile) and 2,2'-azobis(2,4-dimethylvaleronitrile).

Examples of the peroxides include benzoyl peroxide, tert-butyl peroxyacetate, tert-butyl peroxyoctate, cumene hydroperoxide, tert-butyl peroxide, tert-butyl peroxybenzoate, tert-butyl peroxyisopropyl carbonate, tert-butyl hydroperoxide and persulfates (potassium and ammonium salts).

Further, use can be made of an initiator of the formula:

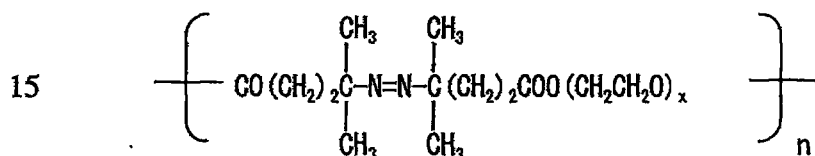

wherein each of x and n is an integer of 1 or greater.

The use of these initiators enables increasing the hydrophilicity of (poly)oxyalkylene block silyl ester copolymer and enables enhancing the antifouling performance and consumability of antifouling coating composition. With respect to the initiator of the above formula, it can effectively be used in cases where the above mercapto compound is not employed, for example, in the polymerization of an unsaturated

carboxylic acid silyl ester intended for producing a silyl ester copolymer.

When the above polymer is used in an antifouling paint, the solution polymerization in which
5 polymerization is carried out in an organic solvent, or the bulk polymerization is preferred among the above various polymerization techniques. The organic solvent used in the solution polymerization technique, although not particularly limited as long as it is inert and
10 does not react with any of the monomers for copolymerization and as long as it can dissolve the monomers, can be, for example, any of:

aromatic hydrocarbons such as xylene and toluene;
aliphatic hydrocarbons such as hexane and heptane;
15 esters such as ethyl acetate and butyl acetate;
alcohols such as isopropyl alcohol and butyl alcohol;
ethers such as dioxane and diethyl ether; and
ketones such as methyl ethyl ketone and methyl
20 isobutyl ketone. These solvents can be used individually or in combination.


The catalyst for copolymerization is used in an amount of, for example, 0.01 to 20 parts by weight, preferably 0.1 to 10 parts by weight, per 100 parts by
25 weight of the sum of components constituting the

(poly)oxyalkylene block silyl ester copolymer. This catalyst can be added once, or can be divided and added two or more times. Dividing the catalyst and effecting addition two or more times is preferred from the viewpoint of regulation of molecular weight, reaction efficiency and conversion ratio.

The solvent is used in an amount of, for example, 0 to 1000 parts by weight, preferably 10 to 500 parts by weight, per 100 parts by weight of the sum of monomers for copolymerization.

It is preferred that the weight average molecular weight of thus produced silyl ester copolymer A be in the range of 500 to 200 thousand, especially 1000 to 100 thousand, and still especially 1500 to 80 thousand.

In the above block polymerization toward a (poly)oxyalkylene block silyl ester copolymer, a terminal radical in the stage of growth of silyl ester copolymer (A) undergoes a chain transfer to the S atom of mercapto compound (B) to form thioether bond -S-, for example, according to the formula. That is, the (poly)oxyalkylene block silyl ester copolymer has a structure that at least one carbon atom in main chain of the silyl ester copolymer block unit (A) bonds with block unit (B) derived from mercapto compound through -S-(thioether)bond:

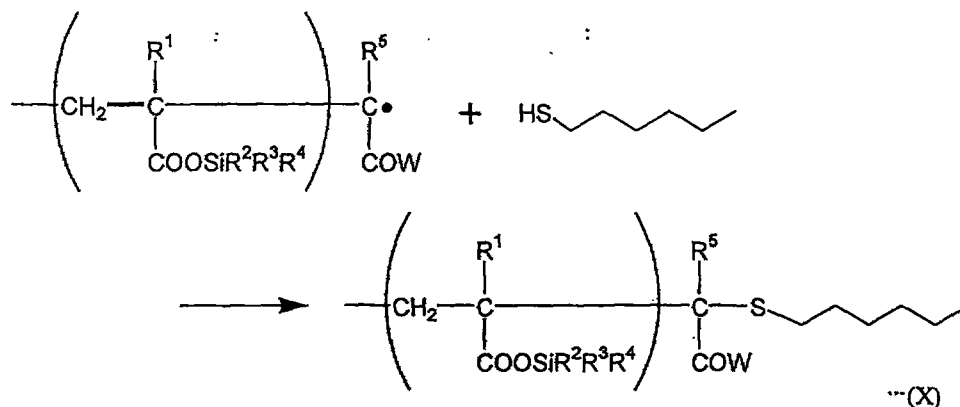

wherein the abbreviations have the same meaning as defined hereinbefore. Thus, the (poly)oxyalkylene
5 block silyl ester copolymer of the present invention can be obtained.

The thus obtained (poly)oxyalkylene block silyl ester copolymer can be of the A-B type (monofunctional), A-B-A type (bifunctional type) or star type (trifunctional or greater functionality) in accordance with the functionality of mercapto group of mercapto compound (B).

In the present invention, although, in carrying out the above reaction, appropriate selection can be made with respect to the sequence of addition of each component and the presence of solvent, it is preferred that the reaction be performed in a solvent, with other components simultaneously charged, or appropriately divided and charged in sequence. The polymerization reaction can be conducted at, for example, 30 to 200°C,

: preferably 40 to 180°C, and still preferably 50 to 150°C, for about 30 min to 24 hr, thereby obtaining the (poly)oxyalkylene block silyl ester copolymer of the present invention.

5 The (poly)oxyalkylene block silyl ester copolymer obtained by the above process generally has the block structure of the A-B type, A-B-A type or star type.

Identification as to the above reaction can be effected by measurement using, for example, GPC, IR
10 spectroscopy or NMR spectroscopy.

The described (poly)oxyalkylene block silyl ester copolymer of the present invention can be used as either a vehicle of antifouling coating composition, a slowly released medicine, or an agricultural polymer.
15 It is especially useful as a vehicle of antifouling paint.

Antifouling coating composition

The antifouling coating composition of the present
20 invention comprises, as a coating forming component, the (poly)oxyalkylene block silyl ester copolymer A which comprises silyl ester copolymer block units (A-1) and block units (A-2), the silyl ester copolymer block units (A-1) comprising (a) component units derived from
25 a polymerizable unsaturated carboxylic acid silyl ester,

and (b) polymerizable unsaturated monomer units other than the component units (a), the block units (A-2) derived from a specified mercapto compound.

The use of the antifouling coating composition
5 containing the (poly)oxyalkylene block silyl ester copolymer leads the formation of an antifouling coating film exhibiting less cracking tendency, excellent adherence so as to ensure less peeling tendency and desirably controlled hydrolysis rate so as to be
10 extremely excellent in antifouling properties in highly fouling environment and long-term-maintained antifouling properties.

The antifouling coating composition (P) of the present invention comprises the above (poly)oxyalkylene
15 block silyl ester copolymer A as an indispensable component. The antifouling coating composition may further contain components other than the (poly)oxyalkylene block silyl ester copolymer (A), for example, an antifouling agent (B), zinc oxide (zinc
20 white) (C), an inorganic dehydrating agent (D), an antisagging/antisetting agent, a leaching accelerating agent such as rosin, a plasticizer such as chlorinated paraffin, various pigments such as a color pigment and a body pigment, various resins such as an acrylic resin
25 and a polyalkyl vinyl ether (vinyl ether (co)polymer),

and various additives such as a defoamer, an antiflooding agent and a leveling agent.

Components and various additives other than the (poly)oxyalkylene block silyl ester copolymer A will be
5 described below.

Antifouling agent (B)

Although common antifouling agents, which may be inorganic or organic, can be widely used as the antifouling agent (B), it is preferred in the present
10 invention to employ copper and/or a copper compound (B-1), a metal pyrithione (B-2) and other organic antifouling agents.

The copper and/or copper compound (B-1) (excluding pyrithiones, the same applies hereinafter) to be added
15 to the antifouling coating composition of the present invention will now be described. Those whose molecular weight is generally in the range of 63.5 to 2000, preferably 63.5 to 1000, are used as the copper and/or copper compound.

20 Both organic and inorganic copper compounds can be used as the copper compound (B-1). Examples of the inorganic copper compounds include cuprous oxide, copper thiocyanate (cuprous thiocyanate or copper rhodanate), basic copper sulfate, copper chloride and
25 copper oxide.

Examples of the organic copper compounds include
basic copper acetate, oxine copper, copper
nonylphenolsulfonate, copper bis(ethylenediamine)-
bis(dodecylbenzenesulfonate), copper naphthenate,
5 copper rodinate and copper bis(pentachlorophenolate).
Inorganic cuprous oxide and copper thiocyanate (copper
rhodanate) are preferably used.

These copper compounds, in place of copper or
together with copper, can be used individually or in
10 combination (copper compounds (B-1) do not include
copper pyrithione).

In the antifouling coating composition of the
present invention, it is preferred that these copper
and/or copper compounds, in total, be generally
15 contained in an amount of 1 to 70% by weight,
especially 3 to 65% by weight. Per 100 parts by weight
of (poly)oxyalkylene block silyl ester copolymer A
contained in the antifouling coating composition, it is
preferred that these copper and/or copper compounds (B-
20 1), in total, be generally contained in an amount of 3
to 1400 parts by weight, especially 10 to 1300 parts by
weight.

When the amount of copper and/or copper compound
contained in the antifouling coating composition is

within the above ranges, an antifouling coating film having excellent antifouling properties can be formed.

In the present invention, use can be made of an organic antifouling agent together with the copper
5 and/or copper compound (B-1) or in place of the copper and/or copper compound (B-1). As the organic antifouling agent, there can be employed, for example, metal pyrithiones (B-2). Examples of the metal pyrithiones include sodium, magnesium, calcium, barium,
10 aluminum, copper, zinc, iron and lead pyrithiones. Of these metal pyrithiones, copper pyrithione and zinc pyrithione are preferred. Copper pyrithione is especially preferred.

In the antifouling coating composition of the
15 present invention, it is preferred that these pyrithione compounds (B-2), in total, be generally contained in an amount of 0.1 to 50% by weight, especially 0.5 to 30% by weight. Per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer
20 A contained in the antifouling coating composition, it is preferred that these pyrithione compounds (B-2), in total, be generally contained in an amount of 0.3 to 300 parts by weight, especially 2 to 200 parts by weight.

In the present invention, the following other antifouling agents may be contained together with the pyrithione compounds (B-2) or in place of the pyrithione compounds (B-2). Conventional various
5 antifouling agents can be used as the other antifouling agents.

Examples of the other antifouling agents include tetramethylthiuram disulfide, carbamate compounds (e.g., zinc dimethyldithiocarbamate and manganese 2-
10 ethylenebisdithiocarbamate), 2,4,5,6-tetrachloroisophthalonitrile, N,N-dimethyldichlorophenylurea, 2-methylthio-4-tert-butylamino-6-cyclopropylamino-s-triazine, 4,5-dichloro-2-n-octyl-4-isothiazolin-3-one, 2,4,6-
15 trichlorophenylmaleimide, pyridine-triphenylborane and amine-triphenylborane.

In the present invention, these antifouling agents can be used individually or in combination, together with pyrithione compounds (metal pyrithiones) such as
20 zinc pyrithione (in the formula (IV), R^1 to R^4 = H, M = Zn and n = 2) and copper pyrithione (in the formula (IV), R^1 to R^4 = H, M = Cu and n = 2). For example, copper pyrithione and/or zinc pyrithione can be used in combination with 4,5-dichloro-2-n-octyl-4-isothiazolin-
25 3-one.

The total content of various antifouling agents, such as copper and/or copper compounds (B-1) and pyrithione compounds (B-2), in the antifouling coating composition, although depends on the types of coating film forming copolymer and antifouling agent used in the preparation of antifouling coating composition and the type of, for example, marine vessel to be coated with the antifouling coating composition (with respect to marine vessel, its sea route, speed, operation rate, size and location of ship bottom) and cannot be unconditionally determined, is preferably in the range of 10 to 1400 parts by weight, still preferably 20 to 1300 parts by weight, per 100 parts by weight of the above (poly)oxyalkylene block silyl ester copolymer A.

For example, when zinc pyrithione is used in combination with cuprous oxide (Cu_2O) as the antifouling agent in the antifouling coating composition, the zinc pyrithione may be contained in an amount of 2 to 200 parts by weight per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A while the cuprous oxide may be generally contained in an amount of about 10 to 1300 parts by weight per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A in the antifouling coating composition.

Even if the zinc pyrithione and cuprous oxide are

contained, the antifouling coating composition because of containing the specific copolymer having the block unit derived from mercapto compound is excellent in storage stability and does not suffer viscosity increase or gelation during storage, as different from the aforementioned antifouling paints of the prior art.

Moreover, for example, when copper pyrithione is used in combination with cuprous oxide (Cu_2O) as the antifouling agent in the antifouling coating composition, the copper pyrithione may be contained in an amount of 2 to 200 parts by weight per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer (A) while the cuprous oxide may be generally contained in an amount of about 10 to 1300 parts by weight per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A in the antifouling coating composition.

Zinc oxide (zinc white) (C)

Zinc oxide (zinc white) (C) may be contained in the antifouling coating composition of the present invention. In the use of the antifouling coating composition wherein zinc oxide is contained, the obtained coating film strength is enhanced, and the abrasability of coating film can be effectively controlled.

From the viewpoint of regulation of consumability and regulation of coating film hardness, it is generally preferred that zinc oxide be contained in the antifouling coating composition in an amount of 0.5 to 5 35% by weight, especially 1 to 25% by weight.

Inorganic dehydrating agent (D)

The antifouling coating composition of the present invention may be loaded with an inorganic or organic dehydrating agent, preferably an inorganic dehydrating 10 agent (inorganic dehydrating agent (D)). The antifouling coating composition loaded with a dehydrating agent exhibits an enhanced storage stability.

The dehydrating agent can be, for example, any of 15 anhydrous gypsum (CaSO_4), synthetic zeolite adsorbents (trade name: Molecular Sieve), orthoesters such as methyl orthoformate and methyl orthoacetate, orthoboric esters, silicates and isocyanates (trade name: Additive TI). In particular, anhydrous gypsum and Molecular 20 Sieve are preferably used as the inorganic dehydrating agent (D). Such inorganic dehydrating agents can be used individually or in combination.

It is generally preferred that the above dehydrating agent, especially the inorganic dehydrating 25 agent, be added in an amount of 0.02 to 100 parts by

weight, especially 0.2 to 50 parts by weight, per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A.

Further, it is generally preferred that such
5 inorganic dehydrating agents, in total, be contained in an amount of 0.01 to 10% by weight, especially 0.1 to 5% by weight, based on the antifouling coating composition. When the inorganic dehydrating agents are contained in the antifouling coating composition in the
10 above amount, the storage stability thereof tends to be increased.

Leaching accelerating component (E)

The antifouling coating composition of the present invention may contain a leaching accelerating component
15 (E). The leaching accelerating component (E) can be, for example, any of rosins, rosin derivatives, organic carboxylic acids and metal salts of organic carboxylic acids.

Examples of the rosins include gum rosin, wood
20 rosin and tall oil rosin. All of these can be used in the present invention. Examples of the rosin derivatives include disproportionated rosin, low-melting-point disproportionated rosin, hydrogenated rosin, polymerized rosin, maleic rosin, aldehyde-
25 modified rosin, polyoxyalkylene esters of rosin,

reduced rosin (rosin alcohol), metal salts of rosin (e.g., copper, zinc, magnesium and potassium salts of rosin) and rosin amine. These rosins and derivatives thereof can be used individually or in combination.

5 As the organic carboxylic acids, there can be mentioned, for example, natural and synthetic fatty acids having about 5 to 30 carbon atoms. Examples of the organic carboxylic acids include pivalic acid, lauric acid, stearic acid, oleic acid, isononanoic acid, 10 versatic acid, tall oil fatty acid, isostearic acid, naphthenic acid, 2-ethylhexanoic acid, coconut oil fatty acid and soybean fatty acid. Examples of the metal salts of organic carboxylic acids include copper, zinc, magnesium and calcium salts of the above acids.

15 Among these leaching accelerating components, rosins and rosin derivatives are preferred. These leaching accelerating components can be used individually or in combination.

It is preferred that these leaching accelerating 20 components be contained in an amount of 0.1 to 30 parts by weight, especially 0.1 to 20 parts by weight, and still especially 0.5 to 15 parts by weight, per 100 parts by weight of antifouling coating composition. The content of leaching accelerating components is 25 preferred to fall within these ranges from the

viewpoint of coating film strength, antifouling performance and water resistance.

Per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A contained in the antifouling coating composition, it is generally preferred that the leaching accelerating components, in total, be contained in an amount of 0.3 to 600 parts by weight, especially 2 to 300 parts by weight.

When the content of leaching accelerating components in the antifouling coating composition is within these ranges, the antifouling performance and coating film consumability tend to be improved.

Vinyl ether (co)polymer (F)

The vinyl ether (co)polymer, when added to the antifouling coating composition of the present invention, contributes to enhancement of the cracking resistance, peeling resistance and leaching velocity stability of obtained coating film and further functions as a coating film forming component.

The vinyl ether (co)polymer can be, for example, any of polyvinyl methyl ether, polyvinyl ethyl ether, polyvinyl isopropyl ether and polyvinyl isobutyl ether.

It is generally preferred that the vinyl ether (co)polymer (F) in total be contained in an amount of 0.1 to 10 parts by weight, especially 0.2 to 5 parts by

weight, per 100 parts by weight of antifouling coating composition. Per 100 parts by weight of silyl ester copolymer A contained in the antifouling coating composition, it is generally preferred that the vinyl
5 ether (co)polymer be contained in an amount of 0.3 to 60 parts by weight, especially 0.6 to 40 parts by weight.

Moreover, various polymers having a hydrophilic group can be used in place of the vinyl ether
10 (co)polymer or together with the vinyl ether (co)polymer. The polymers having a hydrophilic group can be, for example, various (alkoxy)polyalkylene glycol mono(meth)acrylate (co)polymers such as (methoxy)polyethylene glycol mono(meth)acrylate
15 (co)polymer. The same effect as exerted by the vinyl ether (co)polymer can be realized by the use of these polymers.

Plasticizer (G)

As the plasticizer, there can be employed
20 plasticizers customarily used in paints, such as orthophosphoric acid esters, chlorinated paraffin, phthalic acid esters and adipic acid esters. These plasticizers can be used individually or in combination.

When these plasticizers are used, they are added to the antifouling coating composition in an amount of, for example, 0.1 to 10% by weight.

These plasticizers contribute to enhancement of the cracking resistance of coating film (also referred to as "antifouling coating film" herein) formed from the resultant antifouling coating composition. Among the above plasticizers, chlorinated paraffin and orthophosphoric acid esters such as tricresyl phosphate (TCP) are preferred.

The chlorinated paraffin may be linear or branched, and may be liquid or solid (powdery) at room temperature. As the chlorinated paraffin, there can be mentioned, for example, "Toyoparax 150" and "Toyoparax A-70" produced by Tosoh Corporation. In the present invention, two or more chlorinated paraffins which are different from each other in chlorine content and number of carbon atoms can be used in appropriate combination. When two or more chlorinated paraffins are used in combination, the number of carbon atoms and chlorination ratio of chlorinated paraffin refer to averages of the respective numbers of carbon atoms or chlorination ratios of chlorinated paraffins contained in the antifouling coating composition.

When the above chlorinated paraffin is used as the plasticizer (G), it is generally preferred that the chlorinated paraffin be contained in an amount of 0.05 to 20 parts by weight, especially 0.1 to 15 parts by weight, per 100 parts by weight of antifouling coating composition. Per 100 parts by weight of silyl ester copolymer A contained in the antifouling coating composition, it is preferred that the chlorinated paraffin be contained in an amount of 1 to 50 parts by weight, especially 2 to 40 parts by weight. When the amount of chlorinated paraffin is within these ranges, the effect of suppressing coating film cracking, coating film strength and damaging (impact) resistance are enhanced.

When an orthophosphoric ester is used as the plasticizer (G), it is generally preferred that the orthophosphoric ester be contained in an amount of 0.05 to 20 parts by weight, especially 0.1 to 15 parts by weight, per 100 parts by weight of antifouling coating composition.

Per 100 parts by weight of silyl ester copolymer A contained in the antifouling coating composition, it is preferred that the orthophosphoric ester be contained in an amount of 1 to 50 parts by weight, especially 2 to 40 parts by weight.

When the orthophosphoric ester is contained as the plasticizer (G), a coating which hardly cracks and peels can be formed, and the consumability of coating film can be enhanced.

5 Dehydrating agent (H)

This antifouling coating composition may be loaded with an inorganic or organic dehydrating agent. The antifouling coating composition loaded with a dehydrating agent exhibits an enhanced storage
10 stability.

The dehydrating agent can be, for example, any of anhydrous gypsum (CaSO_4), synthetic zeolite adsorbents (trade name: Molecular Sieve), orthoesters such as methyl orthoformate and methyl orthoacetate, orthoboric
15 esters, silicates and isocyanates (trade name: Additive TI). In particular, anhydrous gypsum and Molecular Sieve are preferably used as the inorganic dehydrating agent (H). Such dehydrating agents can be used individually or in combination.

20 It is generally preferred that the above dehydrating agent be added in an amount of 0.02 to 100 parts by weight, especially 0.2 to 50 parts by weight, per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer A.

Further, it is generally preferred that such dehydrating agents, in total, be contained in an amount of 0.01 to 20% by weight, especially 0.1 to 8% by weight, based on the antifouling coating composition.

- 5 When the dehydrating agents are contained in the antifouling coating composition in the above amount, the storage stability thereof tends to be increased.

Other component

- The antifouling coating composition of the present invention may be loaded with the following components, other than the above components, for example, an antisagging/antisetting agent, various pigments such as a color pigment and a body pigment, various resins such as acrylic resins (excluding the above vinyl ether (co)polymer) and various additives such as a defoamer, an antiflooding agent and a leveling agent.
- 10
15

Antisagging/antisetting agent

- The antifouling coating composition may be loaded with conventional antisagging/antisetting agents in arbitrary amounts. Examples of suitable antisagging/antisetting agents include salts such as Al, Ca and Zn stearates, lecithinates and alkylsulfonates, polyethylene wax, hydrogenated castor oil wax, polyamide wax, mixtures of these waxes, synthetic particulate silica and polyethylene oxide wax. Of
- 20
25

these, hydrogenated castor oil wax, polyamide wax, synthetic particulate silica and polyethylene oxide wax are preferred. Further, use can be made of antisagging/antisetting agents commercially available by the trade names, for example, "Disparlon A-603-20X" and "Disparlon 4200-20", which are produced by Kusumoto Chemicals, Ltd.

Pigment and solvent

Various conventional organic and inorganic pigments (e.g., titanium white, red iron oxide, organic red pigments and talc) can be used as the pigment in the antifouling coating composition. In addition, various colorants such as dyes may be incorporated in the antifouling coating composition.

The cracking resistance of coating film can be enhanced by the use of pigments with needle, flat and flake forms.

Various solvents customarily used in antifouling paints, such as aliphatic, aromatic (e.g., xylene and toluene), ketone, ester and ether solvents, can be incorporated in the antifouling coating composition. The solvent used in the preparation of silyl ester copolymer may be contained in the solvent.

Various resins

Examples of suitable resins include an acrylic resin, a chlorinated polyolefin resin, a chlorinated rubber resin, a petroleum resin, a vinyl chloride resin, a vinyl acetate resin, a polystyrene resin, a butyral resin and an ionomer resin.

Production of antifouling coating composition

The antifouling coating composition of the present invention can be produced by appropriately employing customary techniques. For example, the antifouling coating composition can be obtained by subjecting the (poly)oxyalkylene block silyl ester copolymer A and, per 100 parts by weight of (poly)oxyalkylene block silyl ester copolymer (A), 3 to 1400 parts by weight of copper and/or a copper compound (B), 0.07 to 1200 parts by weight of an organic antifouling agent (C), 2 to 700 parts by weight of zinc oxide (D), 0 to 600 parts by weight of a leaching accelerating component (E), 0.3 to 200 parts by weight of a vinyl ether (co)polymer (F), 1 to 50 parts by weight of a plasticizer (G), 0.03 to 200 parts by weight of a dehydrating agent (e.g., anhydrous gypsum and Molecular Sieve) (H) and appropriate amounts of an antisagging/antisetting agent, a pigment, a solvent, etc. to addition conducted once or in arbitrary sequence and to agitation, mixing, dispersion, etc.

The thus obtained antifouling coating composition is of the one package type and has excellent storage stability. Further, the antifouling coating composition satisfies various requirements for performance such as antifouling coating adherence, durability and antifouling properties.

For example, hulls and marine structures covered with an antifouling coating film having excellent cracking resistance and antifouling properties can be obtained by applying the above antifouling coating composition to the surface of various shaped items (bases), such as an underwater/floating structure, namely, a marine structure (e.g., plumbing port of a nuclear power station), a sludge diffusion preventive film for use in various ocean civil works for a bayshore road, an undersea tunnel, port facilities, a canal/channel, etc., a marine vessel and a fishing gear (e.g., a rope and a fishing net), once or a plurality of times according to the customary procedure, and drying the applied antifouling coating composition. This antifouling coating compositions may be directly applied to the surface of hulls and marine structures, or applied to the surface of hulls and marine structures precoated with an undercoating material such as a rust preventive or a primer. Moreover, the

antifouling coating composition of the present invention may be applied as a top coat for repair to the surface of hulls and marine structures previously coated with the conventional antifouling paint or the
5 antifouling coating composition of the present invention. Although the thickness of the antifouling coating thus formed on the surface of hulls and marine structures is not particularly limited, for example, it ranges from about 30 to 150 μm for each application.

10

EFFECT OF THE INVENTION

The (poly)oxyalkylene block silyl ester copolymer of the present invention, when used in an antifouling paint, is excellent in self-polishing properties
15 (consumability) and long-term antifouling performance, especially long-term antifouling performance in highly fouling sea area, and also excellent in coating cracking resistance and peeling resistance. Moreover, the (poly)oxyalkylene block silyl ester copolymer,
20 because of the containing of block units derived from a mercapto compound, enables reduction of the use of solvents, thereby exhibiting such excellent performance as enhanced coating efficiency (i.e., enhanced sprayability, roller applicability and brush
25 applicability).

According to the present invention, there is provided an antifouling coating composition which enables forming such an antifouling coating as exhibits less cracking tendency, excellent adherence so as to ensure less peeling tendency and desirably controlled hydrolysis rate so as to be excellent in antifouling properties, in particular, antifouling properties in highly fouling environment and long-term antifouling properties, which antifouling coating film is further excellent in a balance of these properties.

Further, according to the present invention, there is provided a coating film with the above excellent properties, and provided a hull or underwater structure covered with the coating film to thereby have the above excellent properties.

Still further, according to the present invention, there is provided an antifouling method wherein the above antifouling coating composition is employed to thereby enable rendering the danger of environmental pollution extremely low.

EXAMPLE

The present invention will further be illustrated below with reference to the following Examples which in no way limit the scope of the invention. In the fol-

lowing Examples and Comparative Examples, the term "parts" means "parts by weight".

Example 1

(poly)oxyalkylene block silyl ester copolymer (BP-

5 1)

100 parts of xylene was charged in a reaction vessel equipped with an stirrer, a condenser, a thermometer, a dropping device, a nitrogen introduction tube and a heating/cooling jacket, and heated under stirring at 85°C while blowing nitrogen thereinto. A mixture of 40 parts of triisopropylsilyl acrylate, 55 parts of methyl methacrylate, 1.5 parts of mercapto compound M-1 defined below and 1 part of 2,2'-azobisisobutyronitrile as an initiator was dropped through the dropping device into the reaction vessel while maintaining the above temperature over a period of 2 hr. The stirring was continued at the same temperature for 4 hr. Further, 0.4 part of 2,2'-azobisisobutyronitrile was added, and the agitation was continued at the same temperature for 4 hr. Thus, a colorless transparent solution of (poly)oxyalkylene block silyl ester copolymer (BP-1) was obtained.

The heating residue (residue resulting from drying in a hot air dryer at 105°C for 3 hr) from the obtained solution of (poly)oxyalkylene block silyl ester

copolymer (BP-1) amounted to 50.5% by weight. The viscosity at 25°C thereof was 72 cps, and the weight average molecular weight (Mw) and number average molecular weight (Mn), measured by GPC, of the residue
5 were 5603 and 2748, respectively.

GPC chromatogram and IR spectral chart of (poly)oxyalkylene block silyl ester copolymer (BP-1) are given in Figs. 1 and 2, respectively.

GPC and IR measurements were performed under the
10 following conditions.

(Conditions for GPC measurement)

Instrument: HLC-8120 GPC manufactured by Tosoh Corporation,

Column: Super H2000+H4000, 6 mm inside diameter
15 and 15 cm, manufactured by Tosoh Corporation,

Eluant: THF,

Flow rate: 0.500 ml/min,

Detector: RI, and


Temperature of column thermostat: 40°C.

20 (Conditions for IR measurement)

Instrument: Hitachi infrared spectrophotometer, model 270-30, manufactured by Hitachi, Ltd., and

Measuring method: KBr cell, coating method.

Compound M-1:



Examples 2 to 20 and Comparative Examples 1 and 2

Copolymers (BP-2) to (BP-20) and copolymers (H-1)

5 and (H-2)

These (poly)oxyalkylene block silyl ester
 copolymers (BP-2) to (BP-20) and comparative copolymers
 (H-1) and (H-2) were produced in the same manner as in
 the preparation of (poly)oxyalkylene block silyl ester
 10 copolymer (BP-1), except that the composition of
 dropping component mixture was changed as specified in
 Table 1. The properties of these copolymers
 (solutions) were also measured in the same manner.

The formulae for mercapto compounds M-2 to M-12
 15 used in the preparation of these copolymers are given
 below. The results are also specified in Table 1.



Table 1(1)

				Example											
				1	2	3	4	5	6	7	8	9	10	11	
dropping component copolymeri- zation component (pts.wt.)	solvent	xylene		100	100	100	100	100	100	100	100	100	100	100	
	silyl ester copolymer (A)	component (a)	triisopropylsilyl acrylate	40	45	50	50	50	50	50	50	50	50	50	
			triisobutylsilyl methacrylate												
			tri-sec-butylsilyl methacrylate												
			tri-n-butylsilyl methacrylate												
		component (b)	methyl methacrylate	55	50	45	47	45	45	45	45	45	45	45	
			ethyl acrylate												
			glycidyl methacrylate												
			methoxypolyethylene glycol monomethacrylate (n=35)												
			N-ethoxymethylacrylamide												
			2-hydroxypropyl acrylate												
			2-methoxyethyl acrylate												
		mercapto compd. (B)	M-1	5	5	5	3								
			M-2					5							
			M-3						5						
	M-4								5						
	M-5									5					
	M-6										5				
	M-7											5			
	M-8												5		
	M-9													5	
	M-10														
	M-11														
	M-12														
	initiator: 2,2'-azobisisobutyronitrile			1	1	1	1	1	1	1	1	1	1	1	
total			201	201	201	201	201	201	201	201	201	201	201		

(table continued)

Table 1(1) (continued)

		Example										
		1	2	3	4	5	6	7	8	9	10	11
copolymer soln.		BP-1	BP-2	BP-3	BP-4	BP-5	BP-6	BP-7	BP-8	BP-9	BP-10	BP-11
properties of product	heating residue (wt%)	50.5	50.2	50	50.4	50.2	50.3	51	50.6	50.2	50.4	50.2
	viscosity at 25°C (cps)	72	55	46	76	144	89	152	111	154	174	184
	Mn	2748	2678	2589	3281	3968	3364	3683	3349	4109	4505	4405
	Mw	5603	5503	5296	7775	12319	8065	12095	9340	13316	14296	14234
	Mw/Mn	2.04	2.05	2.05	2.37	3.10	2.40	3.28	2.79	3.24	3.17	3.23

Table 1(2)

				Example								Comp. Ex.		
				12	13	14	15	16	17	18	19	20	1	2
dropping component copolymeri- zation component (pts. wt.)	solvent	xylene		100	100	100	100	100	100	100	100	100	100	100
	silyl ester copolymer (A)	component (a)	triisopropylsilyl acrylate	50	50			45	45	40	40	45	60	60
			triisobutylsilyl methacrylate			50								
			tri-sec-butylsilyl methacrylate				55							
			tri-n-butylsilyl methacrylate					5						
		component (b)	methyl methacrylate	45	45	45	40	40	40	52	53	47	40	35
			ethyl acrylate					5						
			glycidyl methacrylate						10					
			methoxypolyethylene glycol monomethacrylate (n=35)							3				
			N-ethoxymethylacrylamide								2			
			2-hydroxypropyl acrylate									3		
			2-methoxyethyl acrylate											5
	mercapto compd. (B)	M-1						5	5	5	5	5		
		M-2												
		M-3												
		M-4												
		M-5												
		M-6												
		M-7												
		M-8												
		M-9		5										
		M-10			5									
		M-11				5								
		M-12					5							
	initiator: 2,2'-azobisisobutyronitrile			1	1	1	1	1	1	1	1	1	1	1
total				201	201	201	201	201	201	201	201	201	201	

(table continued)

Table 1(2) (continued)

		Example									Comp. Ex.	
		12	13	14	15	16	17	18	19	20	1	2
copolymer soln.		BP-12	BP-13	BP-14	BP-15	BP-16	BP-17	BP-18	BP-19	BP-20	H-1	H-2
properties of product	heating residue (wt%)	50.2	50.2	50.6	50.3	50.1	50.3	50.2	50.5	50	50.7	49.9
	viscosity at 25°C (cps)	110	90	64	58	48	56	69	70	54	183	180
	Mn	3479	3402	2807	3815	2592	2703	2681	2705	2608	5022	5012
	Mw	10119	8750	5309	9150	5275	5610	5573	5596	5457	18749	17976
	Mw/Mn	2.91	2.57	1.89	2.40	2.04	2.08	2.08	2.07	2.09	3.73	3.59

Examples 21 to 48

Preparation of antifouling coating composition

The components of each of the formulations of
5 Table 2 were charged into a paint shaker packed with
glass beads as media, shaken for 2 hr, and filtered
through a 100-mesh filter, thereby obtaining the
desired antifouling coating compositions.

With respect to each of the antifouling coating
10 compositions, the storage stability exhibited after
storage at room temperature for two months was
evaluated.

The results are also given in Table 2.

Evaluation of storage stability was made on the
15 basis of an increment of viscosity (Ku value at 25°C
measured by a Stormer viscometer) exhibited by storage
at room temperature for two months after the paint
production by the following measure.

(Criterion for evaluation)

- 20 5: viscosity increment is less than 10,
4: viscosity increment is in the range of 10 to less
than 20,
3: viscosity increment is in the range of 20 to less
than 30,
25 2: viscosity increment is 30 or greater, and

1: there is no fluidity, and measuring of Ku value was impossible.

Furthermore, with respect to each of the antifouling coating compositions, the antifouling performance and consumability were evaluated in the following manners.

The results are also given in Table 2.

Evaluation of antifouling performance

There was provided a sandblasted steel plate of 70 x 200 x 3 mm having been machined to have such a bending that it can be mounted on the side of a rotary drum installed in the seawater in the Bay of Hiroshima.

An epoxy-based zinc-rich primer, an epoxy-based anticorrosive paint and a vinyl binder coat were successively applied in this order to the sandblasted steel plate so that the respective film thicknesses were 20, 150 and 50 μm , respectively, in the dry state. Thereafter, each antifouling coating composition to be tested was radially applied onto the coated steel plate in the radius direction from the center thereof by the use of an applicator with a clearance of 500 μm , and dried indoors for 7 days. Thus, specimen plates were obtained.

This specimen plate was mounted on the rotary drum, and an antifouling test in highly fouling environment

for 12 months was carried out by rotating the rotary drum at a peripheral speed of 5 knots and at a 50% operation (alternate operation comprising 12-hr working during the night and 12-hr stop during the daytime).

5 The antifouling performance was evaluated by visual inspection according to the following criteria.

(Criterion for evaluation)

- 5: no adherent matter is observed on the coating surface,
- 10 4: thin slime adherence is observed on the coating surface,
- 3: thick slime adherence is observed on the coating surface,
- 2: slime adherence and partial adherence of
- 15 Ectocarpales and other plants are observed on the coating surface, and
- 1: all the coating surface is covered with Ectocarpales and other plants.

The consumability was investigated under the
20 following conditions.

(Evaluation of consumability)

An epoxy-based zinc-rich primer, an epoxy-based anticorrosive paint and a vinyl binder coat were applied in this order at an interval of one day to a
25 disk-shaped sandblasted steel plate of 300 mm diameter

and 3 mm thickness so that the respective film thicknesses were 20, 150 and 50 μm , respectively, in the dry state. The obtained coated steel plate was dried indoors for 7 days. Thereafter, each antifouling
5 coating composition to be tested was radially applied onto the coated steel plate in the radius direction from the center thereof by the use of an applicator with a clearance of 500 μm , and dried indoors for 7 days. Thus, specimen plates were obtained.

10 Each of the specimen plates was secured to a motor and rotated in a thermostat filled with 25°C seawater at a peripheral speed of 15 knots for 12 months. The degree of consumption (decrease of coating film thickness) in the vicinity of the circumference of
15 specimen plates was measured.

The evaluation results are also given in Table 2.

Furthermore, the condition of each coating film at the time of measuring the decrease of coating film thickness was evaluated by visual inspection according
20 to the following criteria.

(Criterion for evaluation)

- 5: no abnormality is on the coating,
- 4: some tiny cracks are observed,
- 3: tiny cracks are observed overall,
- 25 2: some clear cracks are observed, and

1: clear cracks are observed overall.

The evaluation results are also given in Table 2.

Component nomenclatures employed in Table 2 are as follows:

5 (1) "Toyoparax 150"

chlorinated paraffin produced by Tosoh Corporation, having 14.5 carbon atoms on the average, a chlorine content of 50%, a viscosity of 12 ps at 25°C and a specific gravity of 1.25 at 25°C;

10 (2) "Lutonal A-25"

polyvinyl ethyl ether produced by BASF AG, having a viscosity of 2.5 to 6.0 Pa·s at 23°C and a specific gravity of 0.96 at 20°C;

(3) "Rosin solution"

15 50% solution of WW rosin in xylene;

(4) "Copper naphthenate solution"

solution of copper naphthenate in xylene, having a copper content in solution of 8%;

(5) "Soluble anhydrous gypsum D-1"

20 IIICaSO_4 white powder of 15 μm average particle diameter, produced by Noritake Co., Ltd.;

(6) "Disparlon 4200-20"

polyethylene oxide wax (20% xylene paste), produced by Kusumoto Chemicals, Ltd.;

25 (7) "Disparlon A603-20X"

fatty acid amide wax (20% xylene paste), produced :
by Kusumoto Chemicals, Ltd.;

(8) "Kyowanoic N"

3,5,5-trimethylhexanoic acid (isononanoic acid),
5 produced by Kyowa Yuka Co., Ltd.;

(9) "Versatic 10 (versatic acid)"

tertiary synthetic fatty acid (10 carbon atoms on
the average), produced by Shell Chemical; and

(10) Naphthenic acid (acid value 200).

10

Comparative Examples 3 and 4

Antifouling coating compositions were prepared in
the same manner as in Examples 21 to 48, except that
the formulations thereof were changed as specified in
15 Table 2. With respect to the obtained antifouling
coating compositions, the storage stability and
antifouling performance were evaluated in the same
manner.

Table 2(1)

		Example									
		21	22	23	24	25	26	27	28	29.	30
formulation compsn. (pts.wt.)	copolymer soln. (A)	BP-1	26								
		BP-2		26							
		BP-3			26						
		BP-4				26					
		BP-5					24				
		BP-6						22			
		BP-7							26		
		BP-8								26	
		BP-9									26
		BP-10									26
		BP-11									
		BP-12									
		BP-13									
		BP-14									
		BP-15									
		BP-16									
		BP-17									
		BP-18									
		BP-19									
		BP-20									
		H-1									
		H-2									
	antifouling agent (B)	cuprous oxide	43	43	43	43	43	43	43	43	43
		copper pyrithione	3	3	3	3	3	3	3	3	3
		zinc pyrithione									
		4,5-dichloro-2-n-octyl-4- isothiazol-in-3-one									
	zinc oxide (C)		6	6	6	6	6	6	6	6	6
	dehydrating agent (D): anhydrous gypsum D-1		1	1	1	1	1	1	1	1	1

(table continued)

Table 2(1) (continued)

			Example									
			21	22	23	24	25	26	27	28	29	30
formulation compsn. (pts.wt.)	leaching accelera- ting component (E)	rosin soln.										
		copper naphthenate soln.										
	vinyl ether copolymer (F): Lutonal A-25									0.5		
	plasticizer (G): Toyoparax 150						1	2				
	pigment	red iron oxide	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		titanium white	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	antisagging agent	Disparlon 4200-20	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		Disparlon A603-20X	4	4	4	4	4	4	4	4	4	4
	Solvent	xylene	13.5	13.5	13.5	13.5	14.5	15.5	13.5	13.5	13.5	13.5
	total		100	100	100	100	100	100	100	100.5	100	100
evaluation result	storage stability		5	5	5	5	5	5	5	5	5	5
	antifouling performance		4	5	5	5	5	5	5	5	5	5
	consumability		76	108	125	107	120	189	131	136	99	111
	condition of coating		5	5	5	5	4	5	5	4	5	5

Table 2(2)

			Example									
			31	32	33	34	35	36	37	38	39	40
formulation compsn. (pts.wt.)	copolymer soln. (A)	BP-1										
		BP-2										
		BP-3										
		BP-4										
		BP-5										
		BP-6										
		BP-7										
		BP-8										
		BP-9										
		BP-10										
		BP-11	26									
		BP-12		24								
		BP-13			26							
		BP-14				26						
		BP-15					26					
		BP-16						26				
		BP-17							26			
		BP-18								26		
		BP-19									26	
		BP-20										26
		H-1										
		H-2										
	antifouling agent (B)	cuprous oxide	43	43	43	43	43	43	43	43	43	43
		copper pyrithione	3	3	3	3	3	3	3	3	3	3
		zinc pyrithione										
		4,5-dichloro-2-n-octyl-4- isothiazol-in-3-one										
		zinc oxide (C)	6	6	6	6	6	6	6	6	6	6
	dehydrating agent (D): anhydrous gypsum D-1		1	1	1	1	1	1	1	1	1	1

(table continued)

Table 2(2) (continued)

			Example									
			31	32	33	34	35	36	37	38	39	40
formulation compsn. (pts.wt.)	leaching accelera-	rosin soln.										
	ting component (E)	copper naphthenate soln.										
	vinyl ether copolymer (F): Lutonal A-25											
	plasticizer (G): Toyoparax 150			1				1				
	pigment	red iron oxide	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		titanium white	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	antisagging agent	Disparlon 4200-20	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		Disparlon A603-20X	4	4	4	4	4	4	4	4	4	4
	Solvent	xylene	13.5	14.5	13.5	13.5	13.5	12.5	13.5	13.5	13.5	13.5
	total		100	100	100	100	100	100	100	100	100	100
evaluation result	storage stability		5	5	5	5	5	5	5	5	5	5
	antifouling performance		5	5	5	5	5	5	5	5	5	5
	consumability		140	147	119	91	125	123	102	115	118	121
	condition of coating		5	4	4	5	5	5	5	5	5	5

Table 2(3)

			Example								Comp. Ex.	
			41	42	43	44	45	46	47	48	3	4
formulation compsn. (pts.wt.)	copolymer soln. (A)	BP-1	20						26	26		
		BP-2		20		20						
		BP-3			20		20	18				
		BP-4										
		BP-5										
		BP-6										
		BP-7										
		BP-8										
		BP-9										
		BP-10										
		BP-11										
		BP-12										
		BP-13										
		BP-14										
		BP-15										
		BP-16										
		BP-17										
		BP-18										
		BP-19										
		BP-20										
		H-1									26	
		H-2										26
	antifouling agent (B)	cuprous oxide	43	43	43	43	43	43	43	35	43	43
		copper pyrithione	3	3	3	3	3	3		7	3	3
		zinc pyrithione							3			
		4,5-dichloro-2-n-octyl-4- isothiazol-in-3-one							3	1		
	zinc oxide (C)		6	6	6	6	6	6	6	6	6	6
	dehydrating agent (D): anhydrous gypsum D-1		1	1	1	1	1	1	1	1	1	1

(table continued)

Table 2(3) (continued)

			Example								Comp. Ex.	
			41	42	43	44	45	46	47	48	3	4
formulation compsn. (pts.wt.)	leaching accelera- ting component (E)	rosin soln.	6									
		copper naphthenate soln.		6								
		Kyowanoic N			3							
		Versatic 10				3						
		tall oil fatty acid					3					
		naphthenic acid						4				
	vinyl ether copolymer (F): Lutonal A-25											
	plasticizer (G): Toyoparax 150											
	pigment	red iron oxide	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		titanium white	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	antisagging agent	Disparlon 4200-20	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
		Disparlon A603-20X	4	4	4	4	4	4	4	4	4	4
	Solvent	xylene	13.5	13.5	16.5	16.5	16.5	17.5	10.5	16.5	13.5	13.5
	total		100	100	100	100	100	100	100	100	100	100
evaluation result	storage stability		5	5	5	5	5	5	5	5	5	5
	antifouling performance		5	5	5	5	5	5	5	5	1	2
	consumability		109	147	185	184	136	135	84	77	26	35
	condition of coating		5	5	5	5	5	5	5	5	5	5



CLAIMS


1. A (poly)oxyalkylene block silyl ester copolymer comprising silyl ester copolymer block units (A) and block units (B),

5 said silyl ester copolymer block units (A) comprising:

(a) component units derived from a polymerizable unsaturated carboxylic acid silyl ester, and


(b) polymerizable unsaturated monomer units other
10 than the component units (a),

said block units (B) derived from a mercapto compound represented by the formula:



15


, or

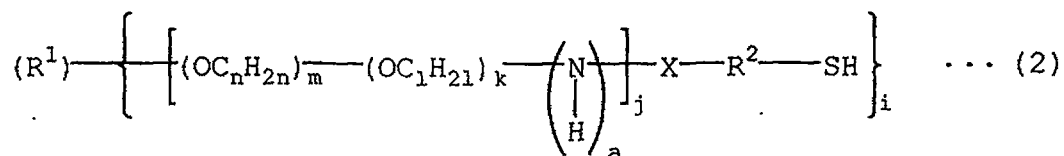

wherein R^1 represents a hydrocarbon group or
20 ether-bond-containing hydrocarbon group having a valency of 1 or higher and having 1 to 30 carbon atoms; R^2 represents a bivalent hydrocarbon group having 1 to 30 carbon atoms or a group of the formula $-CH(R^3)-$.



wherein R^3 represents a group of the formula R^4-O-R^5 ,
 R^4 representing a bivalent hydrocarbon group having 1
to 30 carbon atoms, and R^5 representing a monovalent
hydrocarbon group having 1 to 30 carbon atoms; X
5 represents:




10

; n

is an integer of 1 to 5; m is an integer of 1 to 100; l
is an integer of 1 to 5; k is an integer of 0 to 100; a
is an integer of 0 or 1; j is an integer of 1 to 50;
15 and i is the valency of R^1 .

2. The (poly)oxyalkylene block silyl ester copolymer
as claimed in claim 1, wherein the component units
derived from a polymerizable unsaturated carboxylic
20 acid silyl ester (a) contain component units (a-1)
derived from a silyl (meth)acrylate of the formula:



wherein R represents a hydrogen atom or a methyl
group; and R^a , R^b and R^c may be identical with or
25 different from each other and each represent a linear
alkyl group, a branched alkyl group, a cycloalkyl group,




a substituted or unsubstituted phenyl group or a trimethylsilyloxy group.

3. The (poly)oxyalkylene block silyl ester copolymer
5 as claimed in claim 2, wherein at least one of the R^a , R^b and R^c of the formula (I) represents a branched alkyl group or a cycloalkyl group.

4. The (poly)oxyalkylene block silyl ester copolymer
10 as claimed in any of claims 1 to 3, wherein the component units derived from a polymerizable unsaturated carboxylic acid silyl ester (a) comprise:


silyl (meth)acrylate component units (a-2) of the formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{11} and R^{12} independently represents a linear alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted phenyl group, or a
20 trimethylsilyloxy group; and R^{13} represents an alkyl group having 1 to 18 carbon atoms which may have a ring structure or branch, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group, and



silyl: (meth)acrylate component units (a-3) of the formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{14} and R^{15} independently represents a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms; and R^{16} represents a linear alkyl group having 1 to 10 carbon atoms, a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group.

5. The (poly)oxyalkylene block silyl ester copolymer as claimed in any of claims 1 to 4, wherein the polymerizable unsaturated monomer units (b) other than the component units (a) comprise component units (b-1) derived from an acrylic unsaturated monomer containing a polar group.

6. The (poly)oxyalkylene block silyl ester copolymer as claimed in claim 5, wherein the component units (b-1) derived from an acrylic unsaturated monomer containing a polar group have component units derived from an acrylic unsaturated monomer containing at least one polar group selected from the group consisting of a



hydroxyl group, a hydroxyalkyl group, an alkoxyl group,
a polyoxyalkylene group, an alkylpolyoxyalkylene group,
an amino group, an N-substituted amino group, an amido
group, an N-substituted amido group, an epoxy group, an
5 oxilane group, an oxolane group, an oxetane group, a
tetrahydrofurfuryl group and a morpholino group.


7. An antifouling coating composition comprising a
(poly)oxyalkylene block silyl ester copolymer, which
10 (poly)oxyalkylene block silyl ester copolymer comprises
silyl ester copolymer block units (A-1) and block units
(A-2),

said silyl ester copolymer block units (A-1)
comprising:


15 (a) component units derived from a polymerizable
unsaturated carboxylic acid silyl ester, and

(b) polymerizable unsaturated monomer units other
than the component units (a),


said block units (A-2) derived from a mercapto
20 compound represented by the formula:



, or

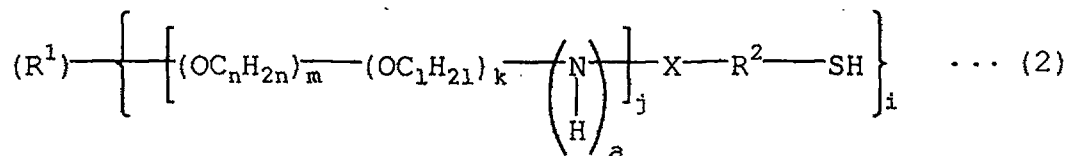

wherein R^1 represents a hydrocarbon group or
 5 ether-bond-containing hydrocarbon group having a
 valency of 1 or higher and having 1 to 30 carbon atoms;
 R^2 represents a bivalent hydrocarbon group having 1 to
 30 carbon atoms or a group of the formula $-CH(R^3)-$
 wherein R^3 represents a group of the formula R^4-O-R^5 ,
 10 R^4 representing a bivalent hydrocarbon group having 1
 to 30 carbon atoms, and R^5 representing a monovalent
 hydrocarbon group having 1 to 30 carbon atoms; X
 represents:




; n is
 an integer of 1 to 5; m is an integer of 1 to 100; l is
 20 an integer of 1 to 5; k is an integer of 0 to 100; a is
 an integer of 0 or 1; j is an integer of 1 to 50; and i
 is the valency of R^1 .

8. The antifouling coating composition as claimed in
 25 claim 7, wherein the component units derived from a



polymerizable unsaturated carboxylic acid silyl ester
(a) contain component units (a-1) derived from a silyl
(meth)acrylate of the formula:




5 wherein R represents a hydrogen atom or a methyl
group; and R^a , R^b and R^c may be identical with or
different from each other and each represent a linear
alkyl group, a branched alkyl group, a cycloalkyl group,
a substituted or unsubstituted phenyl group or a
10 trimethylsilyloxy group.

9. The antifouling coating composition as claimed in
claim 8, wherein at least one of the R^a , R^b and R^c of
the formula (I) represents a branched alkyl group or a
15 cycloalkyl group.

10. The antifouling coating composition as claimed in
any of claims 7 to 9, wherein the component units
derived from a polymerizable unsaturated carboxylic
20 acid silyl ester (a) comprise:

silyl (meth)acrylate component units (a-2) of the
formula:




wherein R represents a hydrogen atom or a methyl
25 group; each of R^{11} and R^{12} independently represents a



linear alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted phenyl group, or a trimethylsilyloxy group; and R^{13} represents an alkyl group having 1 to 18 carbon atoms which may have a ring structure or branch, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group, and

silyl (meth)acrylate component units (a-3) of the formula:



wherein R represents a hydrogen atom or a methyl group; each of R^{14} and R^{15} independently represents a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms; and R^{16} represents a linear alkyl group having 1 to 10 carbon atoms, a branched alkyl or cycloalkyl group having 3 to 10 carbon atoms, a substituted or unsubstituted phenyl group having 6 to 10 carbon atoms, or a trimethylsilyloxy group.

20 11. The antifouling coating composition as claimed in any of claims 7 to 10, wherein the polymerizable unsaturated monomer units (b) other than the component units (a) comprise component units (b-1) derived from an acrylic unsaturated monomer containing a polar group.



12. The antifouling coating composition as claimed in claim 11, wherein the component units (b-1) derived from an acrylic unsaturated monomer containing a polar group are component units derived from an acrylic unsaturated monomer containing at least one polar group selected from the group consisting of a hydroxyl group, a hydroxyalkyl group, an alkoxyl group, a polyoxyalkylene group, an alkylpolyoxyalkylene group, an amino group, an N-substituted amino group, an amido group, an N-substituted amido group, an epoxy group, an oxilane group, an oxolane group, an oxetane group, a tetrahydrofurfuryl group and a morpholino group.

13. The antifouling coating composition as claimed in any of claims 7 to 12, which further comprises an antifouling agent (B).

14. The antifouling coating composition as claimed in any of claims 7 to 13, which further comprises zinc oxide (C).

15. The antifouling coating composition as claimed in any of claims 7 to 14, which further comprises an inorganic dehydrating agent (D).



16. The antifouling coating composition as claimed in any of claims 7 to 15, which further comprises a leaching accelerating component (E).

5 17. An antifouling coating film formed from the antifouling coating composition claimed in any of claims 7 to 16.

10 18. A marine vessel, an underwater structure, a fishing gear or a fishing net, having a surface covered with the antifouling coating film formed from the antifouling coating composition claimed in any of claims 7 to 16.

15 19. A method of rendering antifouling a marine vessel, an underwater structure, a fishing gear or a fishing net, which comprises applying the antifouling coating composition claimed in any of claims 7 to 16 to a base surface of a marine vessel, an underwater structure, a
20 fishing gear or a fishing net and drying the applied antifouling coating composition so that a formed antifouling coating film covers the base surface.