

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 July 2006 (20.07.2006)

PCT

(10) International Publication Number
WO 2006/074518 A1

(51) International Patent Classification:

G08B 13/06 (2006.01) G09F 3/03 (2006.01)
E05B 45/12 (2006.01)

(21) International Application Number:

PCT/AU2006/000038

(22) International Filing Date: 13 January 2006 (13.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2005900146	14 January 2005 (14.01.2005)	AU
2005901557	31 March 2005 (31.03.2005)	AU
2005905259	23 September 2005 (23.09.2005)	AU

(71) Applicant and

(72) Inventor: **HENDERSON, Matthew** [AU/AU]; 5
Chelmsford Avenue, Haberfield, NSW 2045 (AU).

(74) Agent: **FREEHILLS PATENT & TRADE MARK AT-
TORNEYS**; Level 32., MLC Centre, 19-29 Martin Place,
Sydney, NSW 2000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A TRANSPONDER BOLT SEAL AND A HOUSING FOR A TRANSPONDER

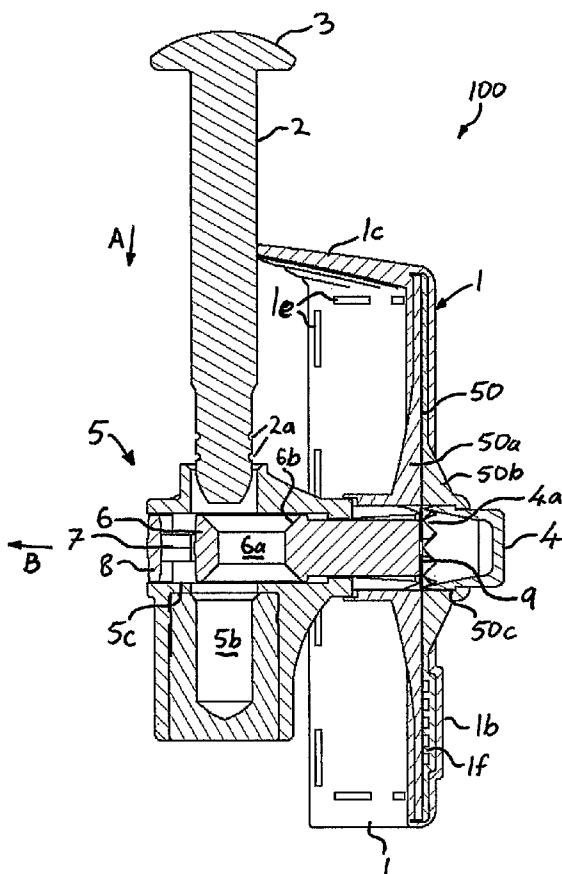

(57) Abstract: An electronic seal (100), housing (1) for a transponder (200), which may form part of an electronic seal (100) and a transponder device is provided. The electronic seal (100) has a sealing mechanism (5). A transponder receptacle (50), and an actuator (4) are provided by or with the housing (1). The actuator (4) is actuated upon engagement of the sealing mechanism (5) to render the transponder (200) operable. The transponder receptacle (50) may hold the transponder (200) so as to extend into three planes.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.