



- (51) **International Patent Classification:**
H01H 23/14 (2006.01)

(21) **International Application Number:**
PCT/IB2021/062257

(22) **International Filing Date:**
23 December 2021 (23.12.2021)

(25) **Filing Language:** Italian

(26) **Publication Language:** English

(30) **Priority Data:**
102020000032282 23 December 2020 (23.12.2020) IT

(71) **Applicant: VIMAR S.P.A.** [IT/IT]; Viale Vicenza, 14, 36063 Marostica (VI) (IT).


(72) **Inventors: FRANCESCHETTO, Alberto;** Via Vegre, 10/A, 36050 Cartigliano (VI) (IT). **GASPAROTTO, Davide;** Via don L. Milani, 9, 36064 Colceresa (VI) (IT). **MOCELLIN, Dario;** Via Belfiore, 29, 36061 Bassano Del Grappa (VI) (IT). **ZAMPIERIN, Ilario;** Via Tonezza, 6, 36061 Bassano Del Grappa (VI) (IT).

(74) **Agent: LOCAS, Davide et al.;** Cantaluppi & Partners S.r.l., P.tta Cappellato Pedrocchi 18, 35122 Padova (IT).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: COVERING DEVICE FOR THE BUTTON OF AN ELECTRIC MODULE

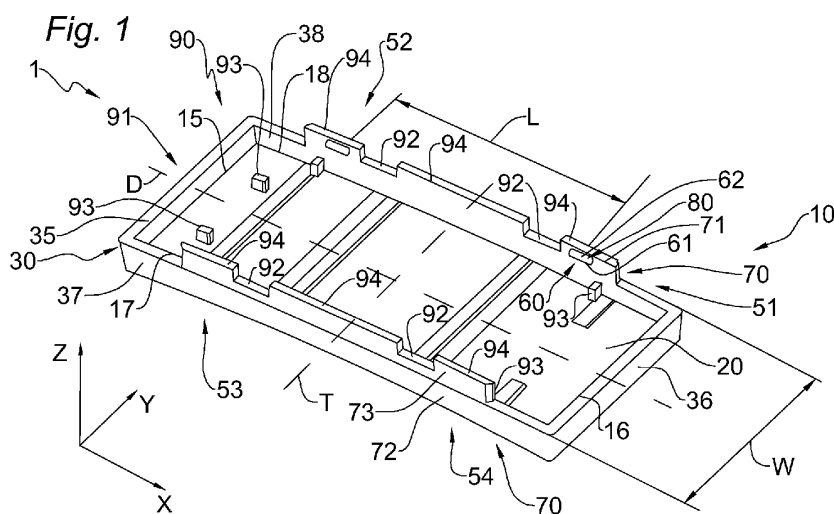

(57) Abstract: Covering device which can be removably connected to a button comprising a member and an engagement system. The member includes a lower surface which is suitable for interfacing with the button and comprising two transverse sides, two longitudinal sides and a frame. The frame extends from the lower surface in a connection direction and extends along the sides of the lower surface. The frame includes two opposite longitudinal components and two opposite transverse components. The engagement system includes engagement elements which are positioned near the longitudinal sides of the lower surface so as to be opposite in pairs with respect to a longitudinal plane which extends in the connection direction and along a longitudinal axis of the lower surface. Each engagement element is resiliently deformable and formed so as to allow the connection with a respective connection element of the button.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*