(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国 际 局

(43) 国际公布日
2019 年 4 月 4 日 (04.04.2019)

WIPO | PCT

(10) 国际公布号
WO 2019/061075 A1

(51) 国际专利分类号:
H04W 4/06 (2009.01)

(21) 国际申请号: PCT/CN2017/103675

(22) 国际申请日: 2017 年 9 月 27 日 (27.09.2017)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: **OPPO 广东移动通信有限公司 (GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD.)** [CN/CN]; 中国广东省东莞市长安镇乌沙海滨路 18 号, Guangdong 523860 (CN)。

(72) 发明人: **唐海 (TANG, Hai)**; 中国广东省东莞市长安镇乌沙海滨路18号, Guangdong 523860 (CN)。

(74) 代理人: **北京派特恩知识产权代理有限公司 (CHINA PAT INTELLECTUAL PROPERTY OFFICE)**; 中国北京市海淀区海淀南路21号中关村知识产权大厦B座2层, Beijing 100080 (CN)。

(81) 指定国 (除另有指明，要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

(84) 指定国 (除另有指明，要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:
— 包括国际检索报告 (条约第21条 (3))。

(54) **Title:** CONTROL METHOD FOR DUPLICATE DATA TRANSMISSION FUNCTION, TERMINAL, AND COMPUTER STORAGE MEDIUM

(54) **发明名称**: 一种复制数据传输功能控制方法、终端和计算机存储介质

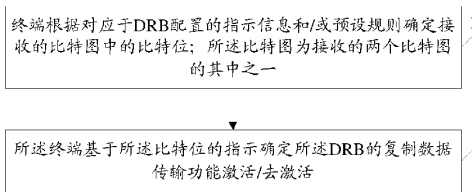

图 2

101 A terminal determining a bit in a received bit map according to configured indication information corresponding to a data radio bearer (DRB) and/or a preset rule, the bit map being one from among two received bit maps

102 The terminal determining a duplicate data transmission function of the DRB to be activated/deactivated on the basis of the indication of the bit

(57) **Abstract:** Disclosed in an embodiment of the present invention are a control method for a duplicate data transmission function, a terminal and a computer storage medium, the method comprising: a terminal determining a bit in a received bit map according to configured indication information corresponding to a data radio bearer (DRB) and/or a preset rule, the bit map being one from among two received bit maps; the terminal determining a duplicate data transmission function of the DRB to be activated/deactivated on the basis of the indication of the bit.

(57) **摘要**: 本发明实施例公开了一种复制数据传输功能控制方法、终端和计算机存储介质，所述方法包括：终端根据对应于数据无线承载 (DRB) 配置的指示信息和/或预设规则确定接收的比特图中的比特位；所述比特图为接收的两个比特图的其中之一；所述终端基于所述比特位的指示确定所述DRB的复制数据传输功能激活/去激活。

WO 2019/061075 A1