

Coated Talc vs. Non-coated Talc
(Unfilled control hours to failure at 150°C)

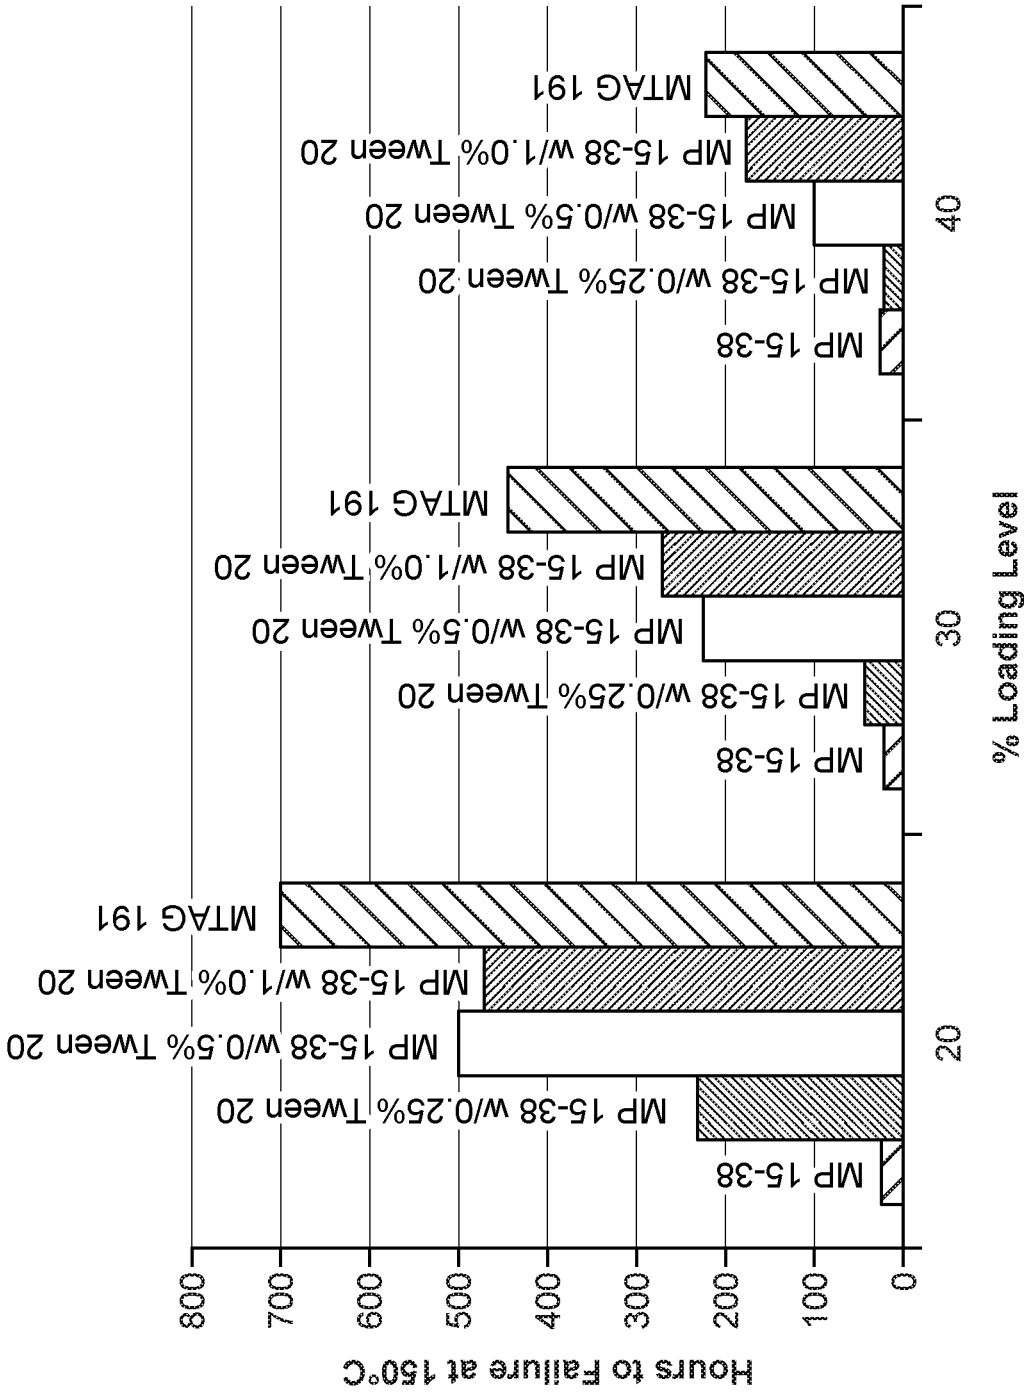


FIG. 1

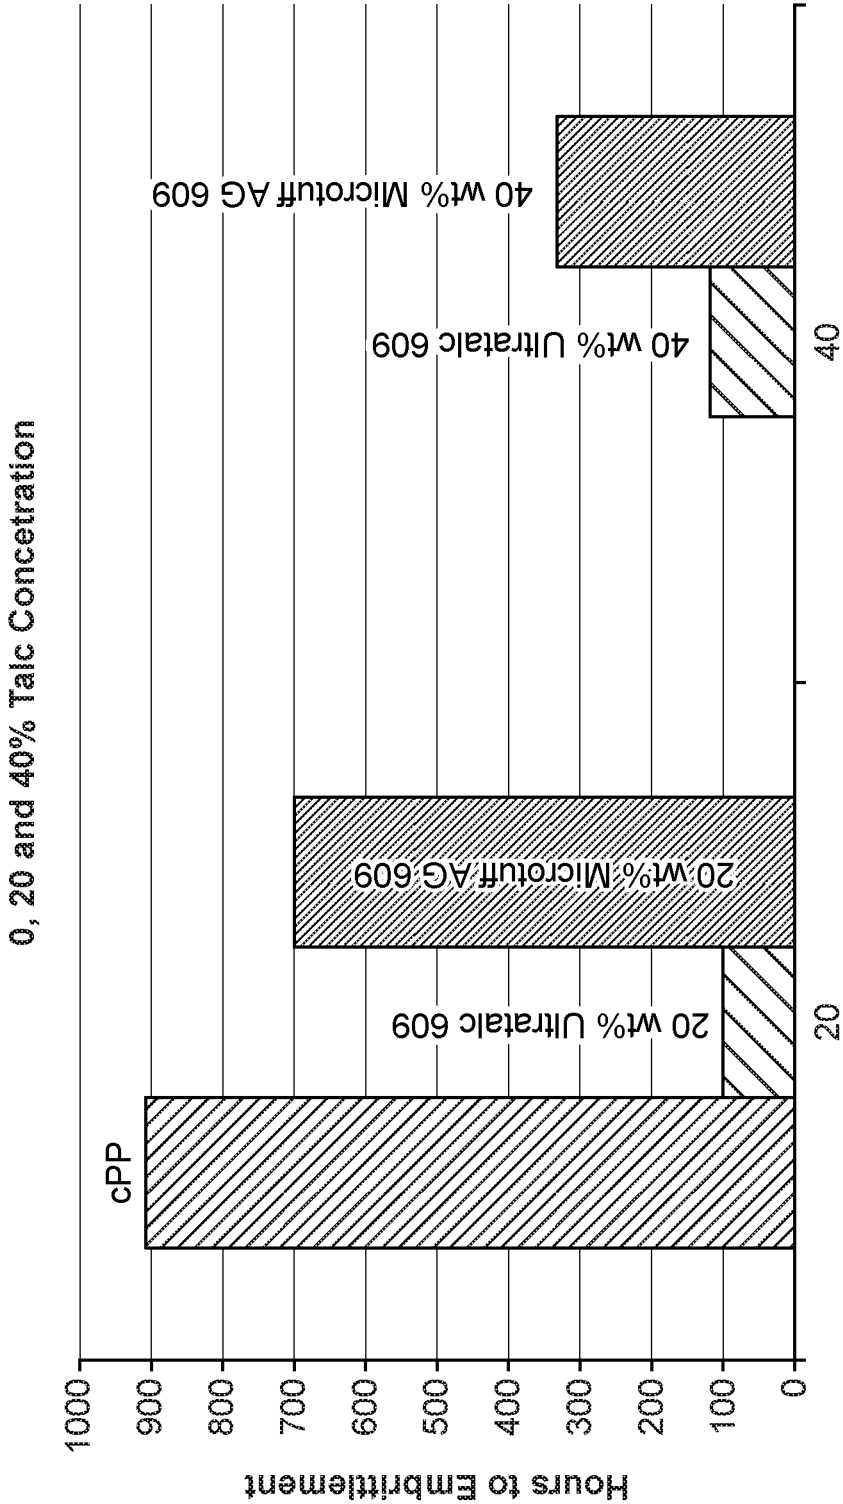


FIG. 2

3 / 3

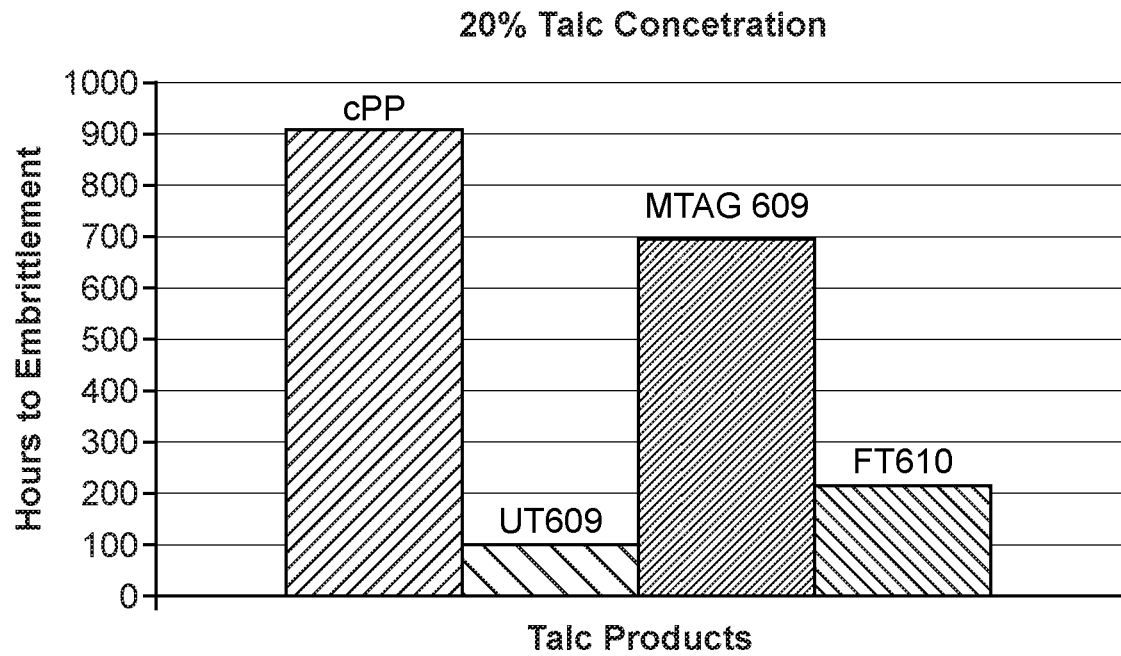


FIG. 3

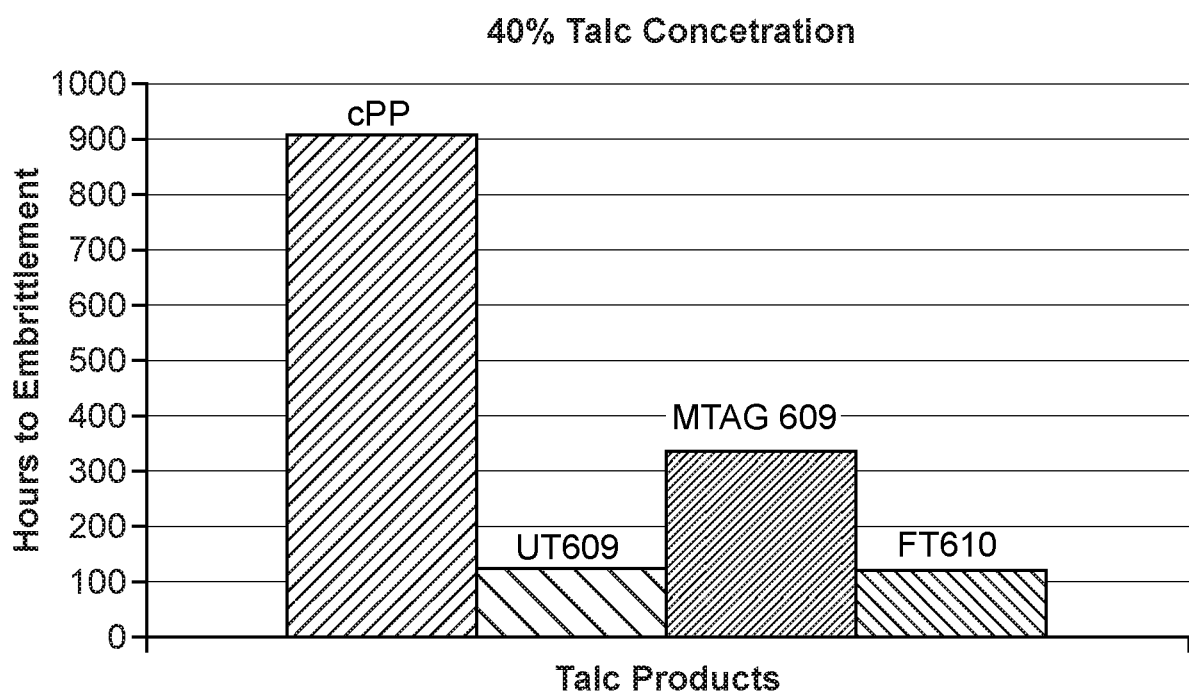


FIG. 4