



(51) International Patent Classification:

*E02D 5/28* (2006.01) *E02D 27/34* (2006.01)  
*E02D 5/54* (2006.01) *E02D 27/36* (2006.01)

(21) International Application Number:

PCT/ID2013/000006

(22) International Filing Date:

5 September 2013 (05.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

P 00 2012 00712

6 September 2012 (06.09.2012)

ID

(72) Inventor; and

(71) Applicant : **JUHANA, Tay** [—/ID]; Jin. Pluit Sakti III  
No.21, RT/RW.006/007, Kec. Penaringan, Jakarta Utara  
(ID).

(74) Agent: **Arifia Jauharia Fajra, ST**; Biro Oktroi Roosseno,  
Kantor Taman A-9, Unit C1 & C2, JLD.R.Ide Anak Agung  
Gde Agung, Mega Kuningan, Jakarta 12950 (ID).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PLATED PILE FOR WET TERRAIN OR MUD WHICH CAN STAND IN STABLE POSITION AND NEEDS NO BEDROCK TO REST ON

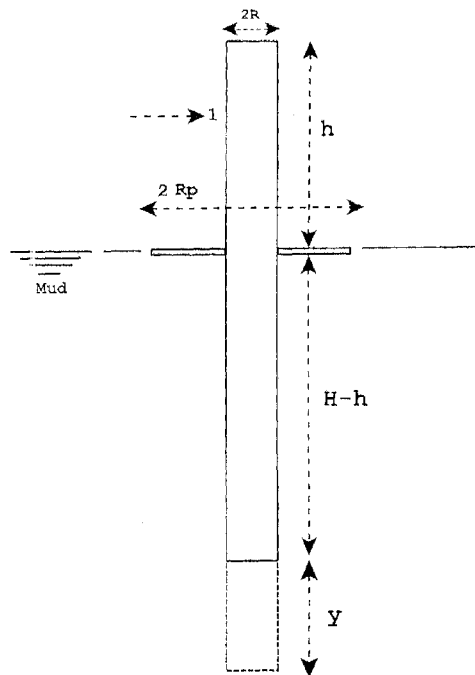


Figure 4

(57) Abstract: Pile (1) made of steel pipe (1), wherein this pile (1) is equipped with a steel plate (2) of at least 1.20 m diameter and 16 mm thickness welded at a point spaced one-third of the entire length from the upper end of the pile (1) for retaining and ceasing of the downward movement of the pile (1) as well as stabilizing its upright position in mud or wet terrain. The distance of one-third of the entire length of the pile (1) from the upper end of the pile (1) is the same as the length of torque arm of the total hydrostatic force acting on the pile (1) with respect to the center of the mass of the pile (1). This equivalent balancing torque enables the pile (1) to sturdily stand upright in a stable position in mud or wet terrain.