



- (51) **International Patent Classification:**
H02K 5/22 (2006.01) *B60K 7/00* (2006.01)
- (21) **International Application Number:**
PCT/SE2012/051298
- (22) **International Filing Date:**
23 November 2012 (23.11.2012)
- (25) **Filing Language:** Swedish
- (26) **Publication Language:** English
- (30) **Priority Data:**
1151162-3 6 December 2011 (06.12.2011) SE
- (71) **Applicant:** BAE SYSTEMS HÄGGLUNDS AK-
TIEBOLAG [SE/SE]; S-891 82 Örnköldsvik (SE).
- (72) **Inventors:** KARLSSON, Pontus; Alpvägen 2a, S-168 65
Bromma (SE). PRINSBACK, Oskar; Krukmakarvägen 4,
S-891 77 Järvad (SE).
- (74) **Agent:** ZACCO SWEDEN AB; P.O. Box 5581, Valhal-
lavägen 117, S-114 85 Stockholm (SE).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) **Title:** ELECTRIC DRIVE DEVICE FOR MOTOR VEHICLE

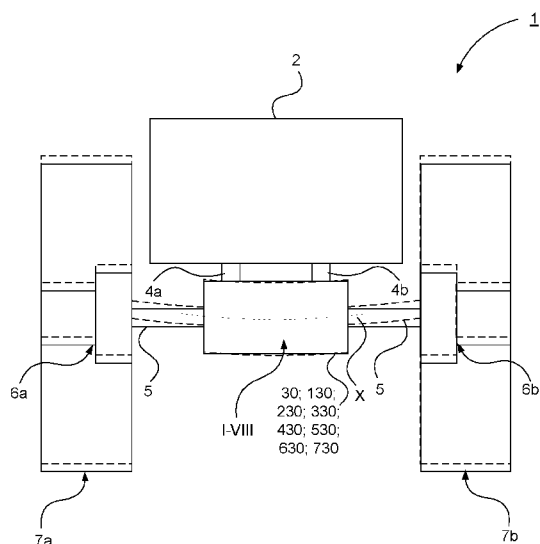


Fig. 1

(57) **Abstract:** The present invention relates to an electric drive device (I-VIII) for driving of a motor vehicle (1) comprising an electric motor (20) arranged to be media supplied, the electric motor (20) having a jacket surface (21) and an essentially ring shaped cross section, wherein said media supply is arranged to be effected via a connection unit (100) arranged in connection to the jacket surface (21) of the electric motor (20). The invention also relates to a motor vehicle (1) with an electric drive device.