

(51) International Patent Classification:
G06F 3/048 (2013.01)(21) International Application Number:
PCT/US2014/046541(22) International Filing Date:
14 July 2014 (14.07.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/845,879 12 July 2013 (12.07.2013) US
14/046,819 4 October 2013 (04.10.2013) US
14/330,522 14 July 2014 (14.07.2014) US

(71) Applicant: TACTUAL LABS CO. [US/US]; 160 Wooster Street, Penthouse B, New York, New York 10012 (US).

(72) Inventors: MCCANNY, Benjamin; 32 Tilson Road, Toronto, Ontario M4S 1P4 (CA). FORLINES, Clifton; 362 Waltham Street, Newton, Massachusetts 02465 (US). WIGDOR, Daniel; 517 Newtown Road, Littleton, Massachusetts 01460 (US).

(74) Agents: KURTZ, Richard et al.; 450 So. Orange Ave., Suite 650, Orlando, Florida 32801 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: REDUCING CONTROL RESPONSE LATENCY WITH DEFINED CROSS-CONTROL BEHAVIOR

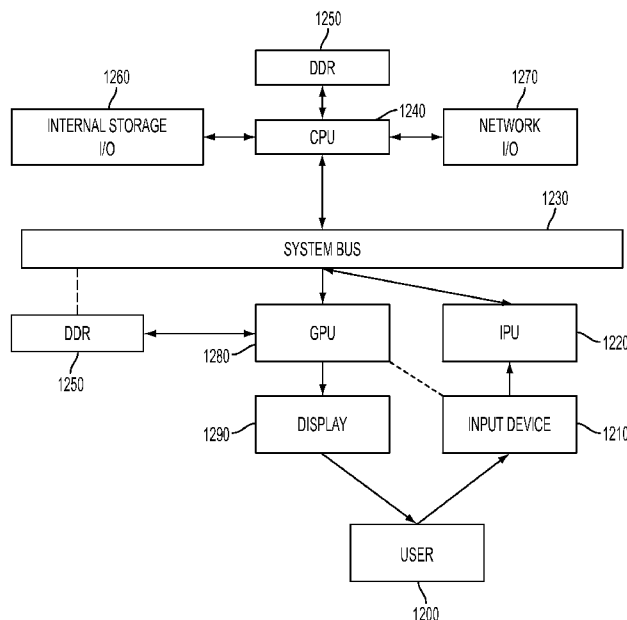


FIG. 12

(57) Abstract: A system for processing user input with reduced control response latency includes an input device, an input processing unit, a high-latency subsystem, a low-latency subsystem, input processing unit software for generating signals, and an output device. The low-latency subsystem receives the signals and generates low-latency output and the high-latency subsystem processes the signals and generates high-latency output. In an embodiment, the signals comprise an identification of a defined cross-control behavior.



— *with amended claims (Art. 19(1))*