



(43) International Publication Date
6 November 2014 (06.11.2014)

- (51) International Patent Classification:
B65D 23/06 (2006.01) *B65D 1/02* (2006.01)
B65D 23/10 (2006.01)
- (21) International Application Number:
PCT/US2014/033483
- (22) International Filing Date:
9 April 2014 (09.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/875,006 1 May 2013 (01.05.2013) US
- (71) Applicant: OWENS-BROCKWAY GLASS CONTAINER INC. [US/US]; One Michael Owens Way, Perrysburg, OH 43551 (US).
- (72) Inventors: BROZELL, Brian, J.; 7201 Elli Harbour Lane, Maumee, OH 43537 (US). GRANT, Edward, A.; 6032 Judge Drive, Toledo, OH 43615 (US).
- (74) Agent: SMITH, Susan, L.; Owens-Illinois, Inc., One Michael Owens Way, Perrysburg, OH 43551 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CONTAINER WITH POUR SPOUT

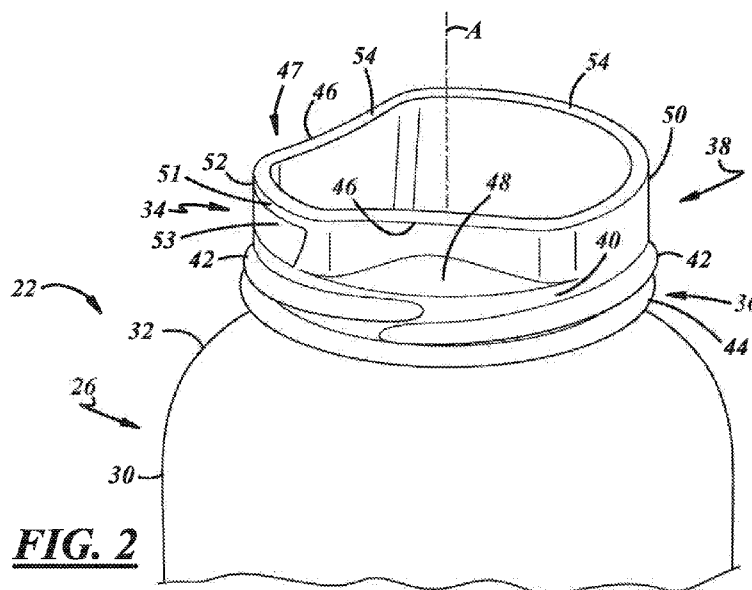

(57) Abstract: A container (22, 122, 222, 322, 422, 522) includes a neck finish (34, 134, 234, 334, 434, 534) extending from a body (26, 126, 226, 326) and having at least two thickened wall portions (66, 266, 466, 566) circumferentially spaced apart and extending radially inwardly, and including interior surfaces (68, 468) disposed radially inwardly of a neck finish interior surface to at least partially establish an internal trough, and axially facing shoulders (48, 448, 548) axially recessed with respect to a sealing lip (54, 454) of the neck finish.