

(10) International Publication Number
WO 2013/175189 A2(43) International Publication Date
28 November 2013 (28.11.2013)

- (51) International Patent Classification: Not classified
- (21) International Application Number: PCT/GB2013/051302
- (22) International Filing Date: 20 May 2013 (20.05.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 1209012.2 22 May 2012 (22.05.2012) GB
- (71) Applicant: CHURCHILL DRILLING TOOLS LIMITED [GB/GB]; 22 Lochinch Drive, Cove, Aberdeen AB12 3RY (GB).
- (72) Inventor: CHURCHILL, Andrew Philip; 22 Lochinch Drive, Cove, Aberdeen AB12 3RY (GB).
- (74) Agent: SHANKS, Andrew; Marks & Clerk LLP, Aurora, 120 Bothwell Street, Glasgow G2 7JS (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DOWNHOLE APPARATUS

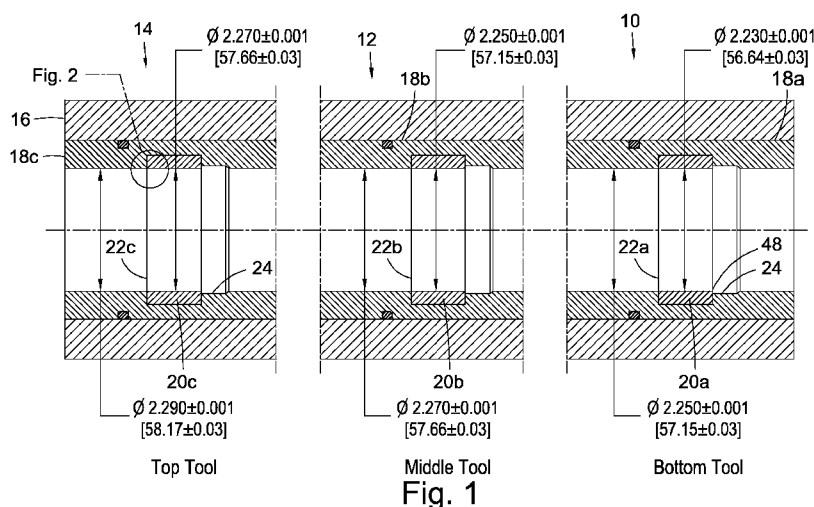

(57) Abstract: Downhole apparatus comprises first and second tools for location in a tubing string. The first tool has a first seat of a first diameter and the second tool has a second seat of a second diameter larger than the first diameter. First and second activating devices are provided for use in activating the respective first and second tools. The first activating device includes a first activating profile having an extended diameter larger than the first diameter and smaller than the second diameter and a retracted diameter smaller than the first diameter. The second activating device includes a second activating profile having an extended diameter larger than the second diameter and a retracted diameter smaller than the second diameter.