



- (51) **International Patent Classification:**
G01C 17/38 (2006.01) *G01C 21/00* (2006.01)
- (21) **International Application Number:**
PCT/IT2012/000310
- (22) **International Filing Date:**
8 October 2012 (08.10.2012)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (71) **Applicant:** MICROTEST S.R.L. [IT/IT]; Via della Galeotta (IT).
- (72) **Inventors:** AMELIO, Guiseppe; Via di Cianciano, 87, I-55100 Lucca fraz. San Pietro a Vico (LU) (IT). CANTINI, Francesco; Via delle Fosse, 66F, I-56031 Bientina (PI) (IT).
- (74) **Agent:** TURINI, Laura; Via Lamarmora, 55, I-50121 Firenze (FI) (IT).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** TEST EQUIPMENT FOR CHECKING SENSORS SENSITIVE TO MAGNETIC FIELDS

FIG. 1

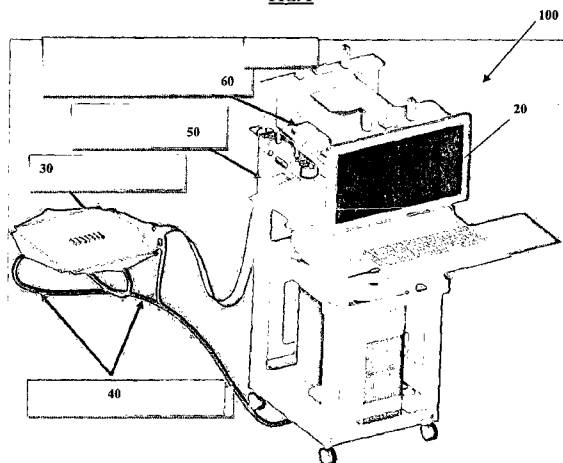

- (57) **Abstract:** The present invention concerns equipment (100) for the check of one or more sensors (200) through the generation of a magnetic field (B) and comprising: - A base plane (30) comprising one or more fixing positions (9) on which said one or more sensors (200) to test can be arranged; - Means (40) to inject electric current in the base plane (3); - Means (10, 15) for the generation of a magnetic field through the circulation of the electric current injected; - Characterized in that said means (10, 15) for the generation of the magnetic field comprise: - Two or more first tracks (10, 15), parallel among them, on which the electric current injected can circulate and that develop on the base plane (30) along a first direction (X, Y); - Two or more second tracks (10, 15), parallel among them, on which the electric current injected can circulate and that develop on the base plane (30) along a second direction (X, Y), orthogonal to the first direction (X, Y); - The fixing positions (9) being placed each one in such a point that a reference plane (500), orthogonal to the base plane (3), passing through said fixing position and parallel to the first tracks or to the second tracks, results a symmetric or substantially symmetric plane for the base plane (30).

