

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 December 2005 (15.12.2005)

PCT

(10) International Publication Number
WO 2005/118423 A2

(51) International Patent Classification⁷: **B65D 81/02**,
1/22, 21/02

(21) International Application Number:
PCT/GB2005/002089

(22) International Filing Date: 26 May 2005 (26.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0412173.7 1 June 2004 (01.06.2004) GB

(71) Applicant (for all designated States except US): **PRO-
TECTIVE PACKAGING SYSTEMS LIMITED**
[BB/GB]; Meadows End, Penreath Close, Longmeadow,
Fowey, Cornwall PL23 1ER (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PITT, Jeffrey,**

Graham [GB/GB]; Meadows End, Penreath Close, Long-
meadow, Fowey, Cornwall PL23 1ER (GB).


(74) Agent: **COLES, Graham, Frederick**; Graham Coles &
Co, 24 Seeleys Road, Beaconsfield, Buckinghamshire HP9
1SZ (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: PACKAGING

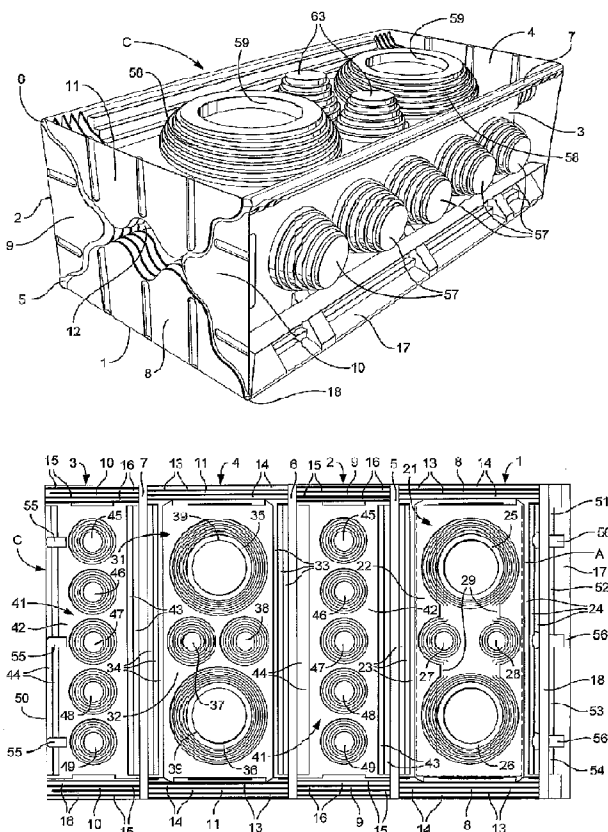

(57) Abstract: A packaging case (C; C') erected by folding from a one-piece vacuum formed moulded sheet, has rectangular walls (1-4; 71-74) that fold, and are clipped closed, about an article (A; S) to be protected from shock. The ends of the case are almost-completely closed by conformal edge-to-edge abutment of end-flanges (8-11; 78-81) of serpentine profile that are upstanding from the walls (1-4; 71-74). The flange-edges are each moulded with ridges (13, 15) and grooves (14, 16) that nest ridge-within-groove with those of the abutting edges, for absorbing shock. The walls (1-4; 71-74) are hinged together edge-to-edge, and at their edges rise in steps (23, 24, 33, 34, 43, 44) to a central plinth (22, 32, 42). The steps (23, 24, 33, 34, 43, 44) of adjacent walls abut one another within the erected case for shock absorption, and each wall (1-4; 71-74) is strengthened by circular recesses (25-28, 35-38, 45-49) of reducing diameter with depth, let into its plinth (22, 32, 42). The circular recesses produce frusto-conical shock-absorbing projections (57, 58, 60, 62, 63) on the outside of the case. The case (C') may accommodate a stack (S) of component-carrying trays (T) protected by end-caps (83).



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*