

9604568-7
IP05 copy

THIS SHEET HAS BEEN
REPLACED

9604568-7 IP05

4

SEIKO EPSON CORPORATION REPLACED SHEETS SG 89/87118A EP

☒	Description	: paged 1 to paged 5
☒	Claim(s)	: paged 6 to paged 7
☒	Drawing(s)	: paged 4 to paged 4
☒	Abstract	: paged 7 to paged 7
DATE OF RECEIPT		

DOT MATRIX PRINTER

HAVING AN IMPACT DOT PRINTING HEAD

This Sheet Has Been Replaced



5

The present invention relates to a dot matrix printer.

Both, enhancement in printing quality and speed-up in printing process are highly required for a dot matrix printer, conceived as a computer terminal equipment, for forming patterns of characters or the like on a recording medium by use of printing wires. The printing head, disclosed in US-A-4,669,898 and JP-A-29681/1983, has been developed to meet this requirement. In this known printing head, the printing ends of the printing wires are disposed in two parallel rows of guide holes provided at the front end of a nose portion of the printing head. A plurality of electromagnetically actuated armatures or printing levers have their movable ends connected to the driven ends of the printing wires. As illustrated in Fig. 3, all of the printing levers a are radially disposed with respect to said guide holes and have their movable ends positioned on an elliptical line, so as to minimize the curvatures of all of the printing wires. Thus, with this configuration, a projected distance l from the joining point c between the driven end of a printing wire b and the corresponding inner end of a printing lever a on the one hand to the printing end of the printing wire b on the other hand is shortened. The minimized curvature or deflection of the printing wires results in a reduced friction between the printing wires and the guide holes. Besides, the entire length of the printing wires b is also shortened, thus decreasing their inertia. Therefore, the known configuration serves to increase the velocity of the printing process.

35

However, when the inner ends of the printing levers a are concentrated on an elliptical line at the head center, ad-

SEIKO EPSON CORPORATION

2

89/87118A EP

jacent printing wires b come excessively close to each other in a region encircled by a circle in Fig. 3, namely a region where the curvature of the ellipse is large. As a result, it is impossible to provide a higher number of printing wires as 5 would be required to enhance the printing quality. In addition, the problem may occur that contiguous printing wires come into contact with each other. To avoid this, a high accuracy of manufacturing and assembling the individual parts of the printing head is necessary and leads to increased ma-
10 nufacturing costs.

It is a primary object of the present invention to remedy the foregoing problems of the prior art and to provide a printing head for a dot matrix printer which allows the printing qua-
15 lity to be enhanced and the printing speed to be increased to the greatest possible degree without necessitating a remarkable enhancing of the accuracy of its parts and of the assembly.

20 This object is solved with a printer as claimed.

Ways of carrying out the invention are described in detail below with reference to the drawings which illustrate only specific embodiments, and in which:

25

Fig. 1 is a sectional view showing one example of a printing head to which the present invention is applied,

30

Fig. 2 is a diagram explaining the positional relation between the printing levers and the printing wires according to an embodiment of the present invention,

35

Fig. 3 is a diagram explaining the positional relation between the printing levers and the printing wires according to the prior art, and

This Sheet Has Been Replaced





SEIKO EPSON CORPORATION

3

89/87118A EP

Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention.

5 Turning first to Fig. 1, there is shown one example of the printing head to which the present invention is applied. In Fig. 1, a plurality of cores, generally designated at 1, are protruded over the surface of an annular magnetic plate 2. Disposed on the respective end surfaces of cores 1 vis-à-vis
10 with each other are armatures 11 fixed to printing levers 10. While no printing is performed, magnetic fluxes from permanent magnets 3 secured to the surface of magnetic plate 2 act to hold armatures 11 by attraction against the resilient forces of plate springs 5. During printing, the attraction of
15 armatures 11 is released when electromagnetic coils 4 wound on cores 11 are selectively energized by electric current to negate the permanent magnetic fluxes. Due to the resilient force of the plate springs 5, printing wires 12 connected to the radially inner ends of the printing levers 10 are then
20 pushed through guide holes at the end of a nose portion 6, thus effecting the printing process.

Fig. 2 is a plan view seen from the left side of Fig. 3 and illustrating on an exaggerated scale the positional relation
25 between the printing levers 10 and the printing wires 12 according to one embodiment of the present invention.

Referring to Fig. 2, the reference numeral 7 denotes a guide plate provided with two parallel rows of guide holes 8. The
30 guide plate 7 is fixed to the end of nose portion 6 as shown in Fig. 3. The guide holes 8 serve to guide the printing ends of the printing wires 12 whose driven ends are fixed to the printing levers 10 as mentioned before. The printing levers 10 are positioned around these guide holes and, except for
35 printing levers 10A, extend radially with respect to the corresponding guide hole 8 so that their axes pass through the projected centers of corresponding guide holes 8. The inner



SEIKO EPSON CORPORATION

4

89/87118A EP

ends of the printing levers 10 are disposed outwards to have a projected distance 1 from the guide holes 8. The printing levers are arranged at spacings δ of, e.g. 0.2 mm, so that the printing wires 12 do not come into contact with each other.

On the other hand, printing levers 10A corresponding to guide holes 8A provided at both ends of the parallel rows of guide holes are arranged in such a manner that their axial lines 10a are displaced inwards from the projected centers of the corresponding guide holes 8A. Furthermore, printing levers 10A are placed to keep at least spacings δ between contiguous printing levers 10B. The two levers 10A on each side of the parallel rows are spaced apart by a distance defined by the two rows of guide holes 8. As in the case of the other printing levers 10, their inner ends are positioned at given distances 1 from the corresponding guide holes 8A.


As a result of this arrangement, angular deviations are caused between the axial lines 10a of the printing levers 10A and the projected axial lines 12a of the associated printing wires 12. In other words, an angle is formed between the axial line 10a of each printing lever 10A and the plane of the corresponding printing wire 12. It is, however, possible to reduce the curvature of the printing wires 12 connected to the printing levers 10A to the same value as that of the printing wires 12 connected to printing levers 10. The curvature or deflection corresponds to the projected distance 1 between the driven end corresponding to the joining point c with a printing lever 10A and the printing end d in Fig. 1. Hence, the printing can be surely performed under the same condition for all printing wires.

In accordance with the described embodiment, only the printing levers 10A are made to deviate from the projected centers of corresponding guide holes 8A to provide the necessary clearance δ between contiguous printing levers 10B and levers

10A themselves. However, when a considerable processing or assembling accuracy is required in order to secure necessary clearances δ between the printing levers 10 because of a high density with which the printing levers are disposed, necessary gaps may be provided between adjacent printing levers 10 by having them deviating from the alignment shown in Fig. 2 in a manner, corresponding to printing levers 10A.

Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention.

Desired figures and characters are printed on printing paper P arranged between platen 27 and ink ribbon 25 by impact dot head 20 mounted on carriage 26 which is supported movably in the printing column direction.



SEIKO EPSON CORPORATION

6

89/87118A EP

Claim

1) 5 A dot matrix printer using a printing head comprising a plurality of printing wires (12), each having a printing end (d) and a driven end, said wires having their printing ends disposed in guide holes (8, 8A) arrayed in two parallel rows in a guide plate (7),

10 a plurality of printing levers (10), equal in number to the number of wires (12), each of said printing levers having an inner end portion connected to the driven end of one of said wires, and

15 driving means (3, 4, 5, 11) for driving said printing levers (10) to selectively move said wires between a printing position and a rest position,

20 characterized in that the axial lines (10a) of those of the printing levers (10A) connected to printing wires (12) guided by guide holes (8A) positioned in the vicinity of the end portion of the rows of guide holes, deviate from projected centers of said guide holes (8A), these printing levers being disposed to form gaps (δ) between adjacent ones of the other printing levers (10) and between themselves, enough to avoid a mutual interference of said printing wires.

1 claims
2667
92118269.7



SEIKO EPSON CORPORATION

7

89/87118A EP

Abstract of the Disclosure (Fig. 2)

DOT MATRIX PRINTER

5

HAVING AN IMPACT DOT PRINTING HEAD

A dot matrix printer having an impact dot printing head is provided with a plurality of printing levers radially disposed with respect to guide holes arrayed at the end of a nose portion of the printing head. Printing wires (12) equal in number to the printing levers (10, 10A) are connected to the radially inner ends of the printing levers and guided by said guide holes (8, 8A). The lever axial lines (10a) of levers (10A) at the ends of the arrays of guide holes deviate from projected centers of the guide holes (8, 8A). Gaps (δ) are formed between adjacent levers to avoid a mutual interference between the printing wires.

✓

This Sheet Has Been Replaced



1/4

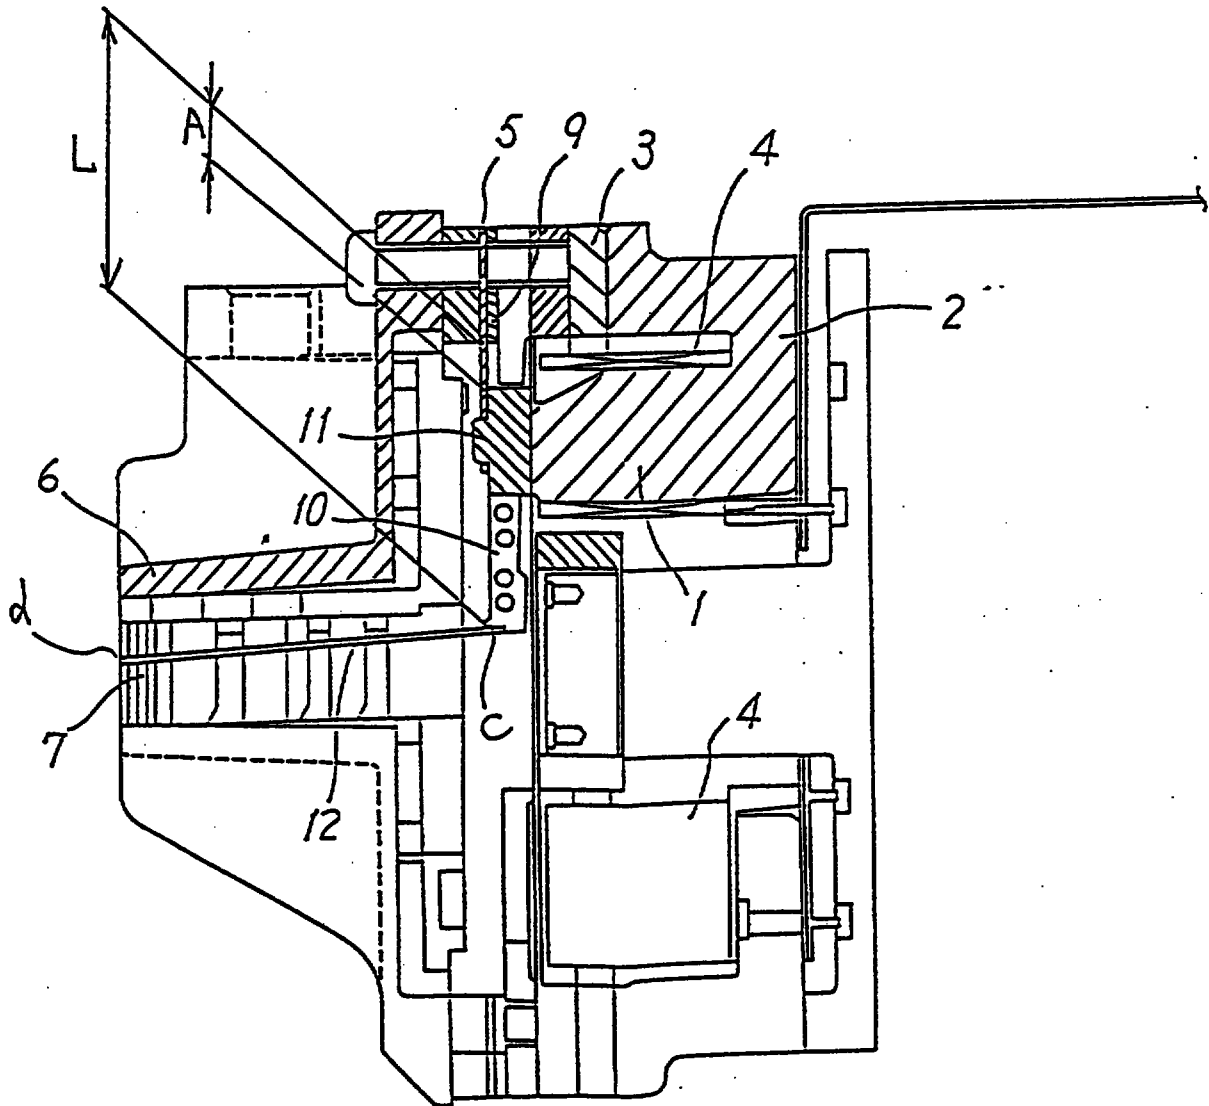


FIG. 1



2/4

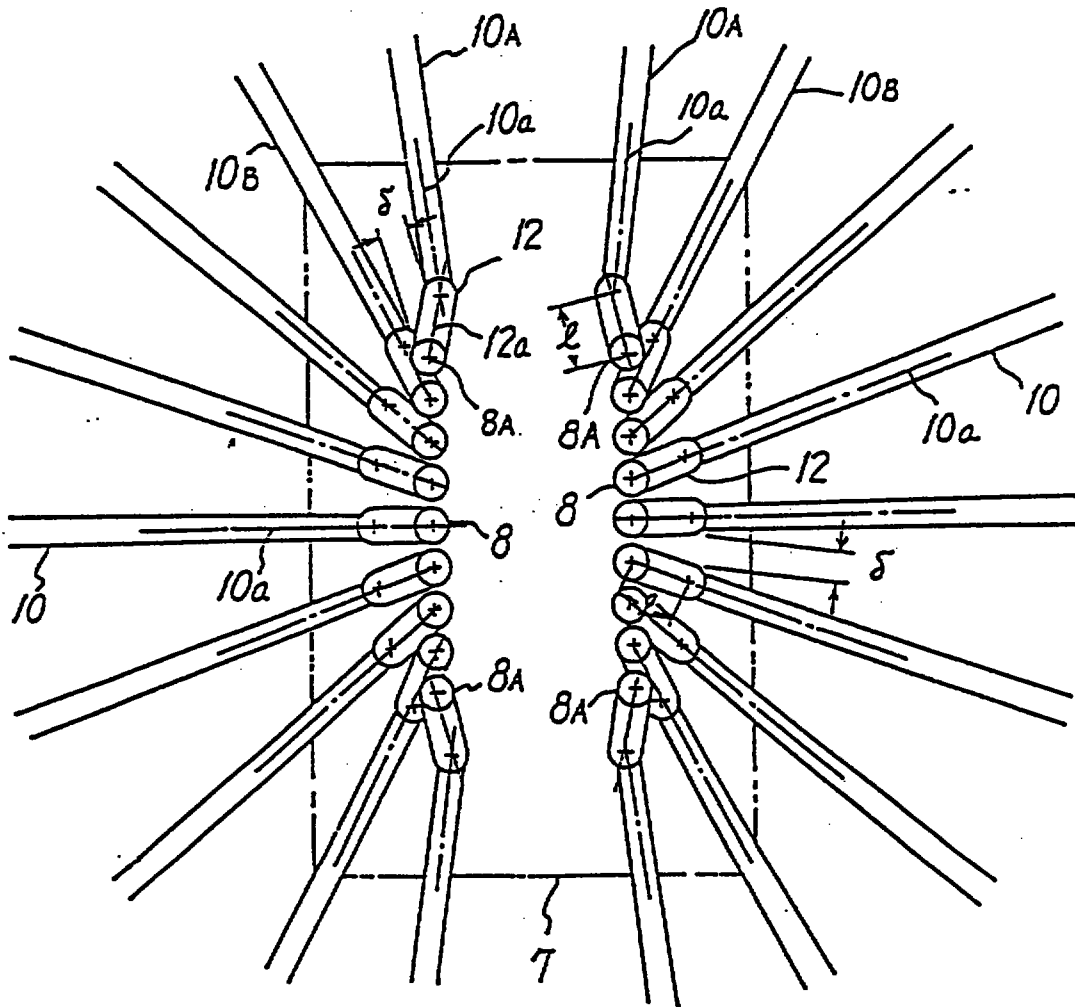


FIG. 2



3/4

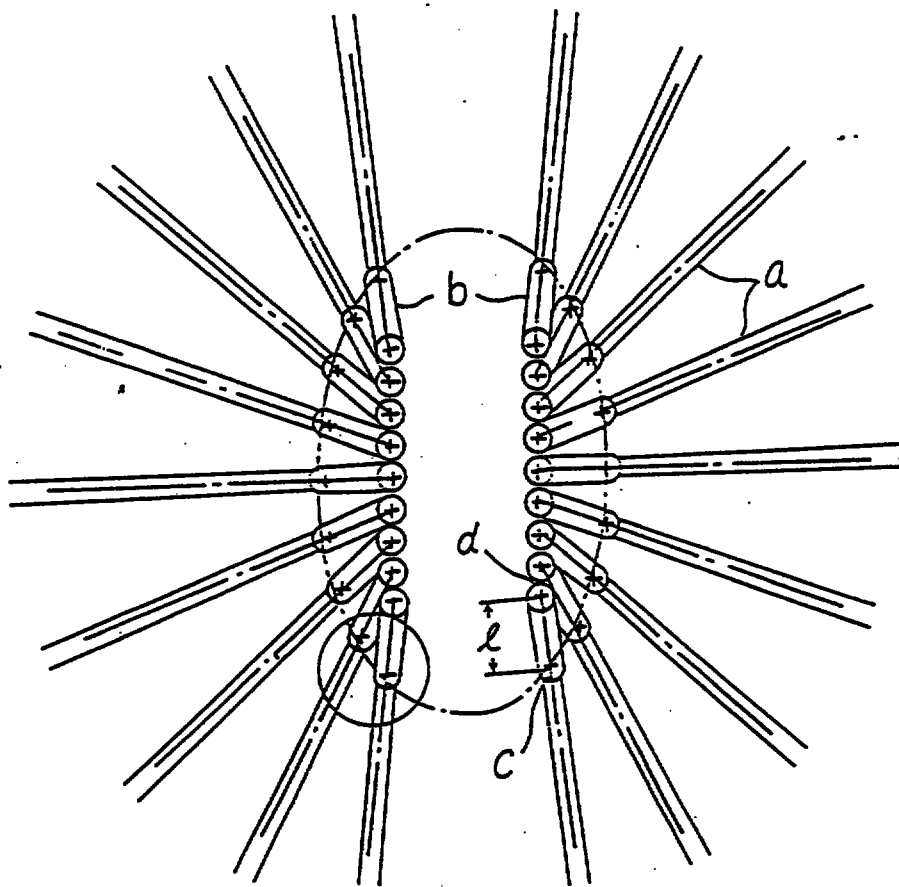


FIG. 3



4/4

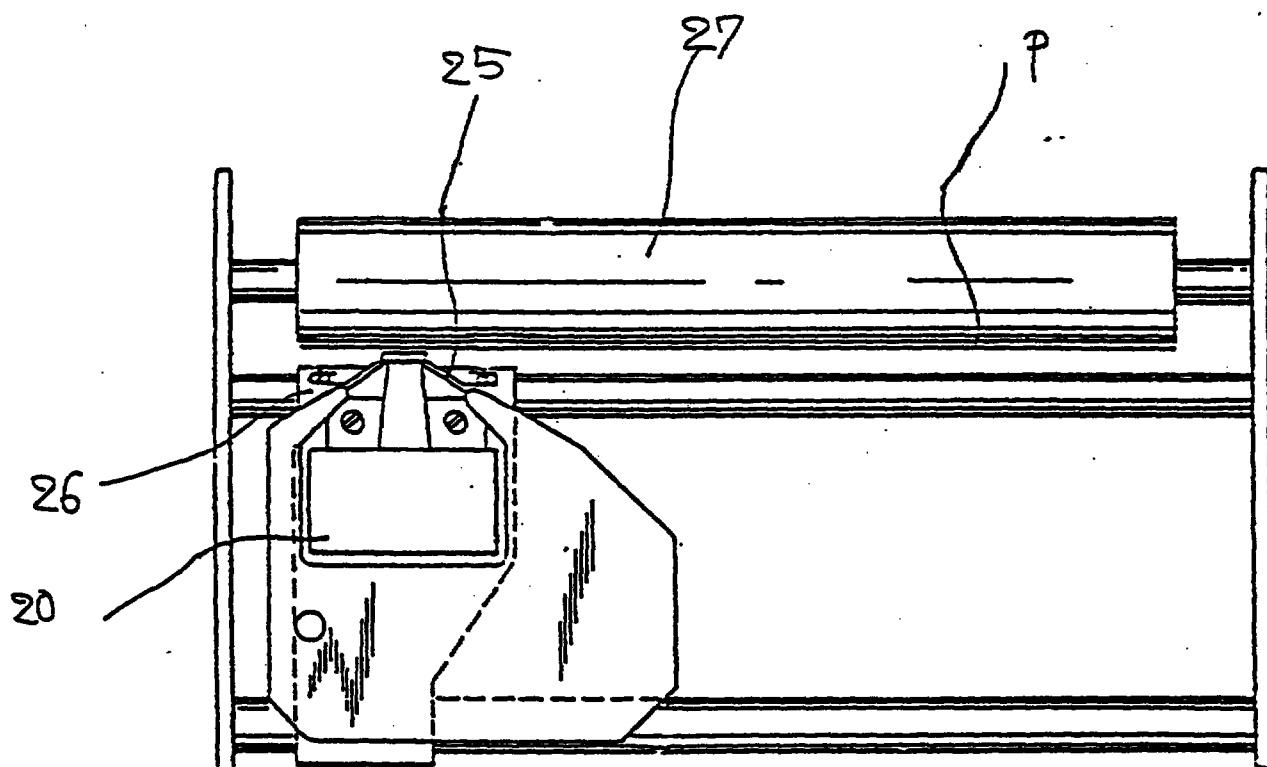


FIG. 4



REPLACED SHEETS		SG
☒	Description : paged ...1... to paged ...5.....	
☒	Claim(s) : paged ...6... to paged ...7.....	
☒	Drawing(s) : paged ...8... to paged ...9.....	
☒	Abstract : paged ...10... to paged ...11.....	
DATE OF RECEIPT		

9604568-7
IP05 copy
1

REPLACEMENT SHEETS		SG
☒	Description : paged ...1... to paged ...5.....	
☒	Claim(s) : paged ...6... to paged ...7.....	
☒	Drawing(s) : paged ...8... to paged ...9.....	
☒	Abstract : paged ...10... to paged ...11.....	
DATE OF RECEIPT 19/10/96		

This Sheet Has Been Replaced

DOT MATRIX PRINTER

DATE OF RECEIPT 19/10/96



HAVING AN IMPACT DOT PRINTING HEAD

The present invention relates to a dot matrix printer.

Both, enhancement in printing quality and speed-up in printing process are highly required for a dot matrix printer, conceived as a computer terminal equipment, for forming patterns of characters or the like on a recording medium by use of printing wires. The printing head, disclosed in US-A-4,669,898 and JP-A-29681/1983, has been developed to meet this requirement. In this known printing head, the printing ends of the printing wires are disposed in two parallel rows of guide holes provided at the front end of a nose portion of the printing head. A plurality of electromagnetically actuated armatures or printing levers have their movable ends connected to the driven ends of the printing wires. As illustrated in Fig. 3, all of the printing levers a are radially disposed with respect to said guide holes and have their movable ends positioned on an elliptical line, so as to minimize the curvatures of all of the printing wires. Thus, with this configuration, a projected distance l from the joining point c between the driven end of a printing wire b and the corresponding inner end of a printing lever a on the one hand to the printing end of the printing wire b on the other hand is shortened. The minimized curvature or deflection of the printing wires results in a reduced friction between the printing wires and the guide holes. Besides, the entire length of the printing wires b is also shortened, thus decreasing their inertia. Therefore, the known configuration serves to increase the velocity of the printing process.

However, when the inner ends of the printing levers a are concentrated on an elliptical line at the head center

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 OCT 1996



jacent printing wires b come excessively close to each other in a region encircled by a circle in Fig. 3, namely a region where the curvature of the ellipse is large. As a result, it is impossible to provide a higher number of printing wires as would be required to enhance the printing quality. In addition, the problem may occur that contiguous printing wires come into contact with each other. To avoid this, a high accuracy of manufacturing and assembling the individual parts of the printing head is necessary and leads to increased manufacturing costs.

It is a primary object of the present invention to remedy the foregoing problems of the prior art and to provide a printing head for a dot matrix printer which allows the printing quality to be enhanced and the printing speed to be increased to the greatest possible degree without necessitating a remarkable enhancing of the accuracy of its parts and of the assembly.

This object is solved with a printer as claimed.

Ways of carrying out the invention are described in detail below with reference to the drawings which illustrate only specific embodiments, and in which:

- Fig. 1 is a sectional view showing one example of a printing head to which the present invention is applied,
- Fig. 2 is a diagram explaining the positional relation between the printing levers and the printing wires according to an embodiment of the present invention,
- Fig. 3 is a diagram explaining the positional relation between the printing levers and the printing wires according to the prior art, and

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 OCT 1996



19 OCT 1996

Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention.

Turning first to Fig. 1, there is shown one example of the printing head to which the present invention is applied. In Fig. 1, a plurality of cores, generally designated at 1, are protruded over the surface of an annular magnetic plate 2. Disposed on the respective end surfaces of cores 1 vis-à-vis with each other are armatures 11 fixed to printing levers 10. While no printing is performed, magnetic fluxes from permanent magnets 3 secured to the surface of magnetic plate 2 act to hold armatures 11 by attraction against the resilient forces of plate springs 5. During printing, the attraction of armatures 11 is released when electromagnetic coils 4 wound on cores 11 are selectively energized by electric current to negate the permanent magnetic fluxes. Due to the resilient force of the plate springs 5, printing wires 12 connected to the radially inner ends of the printing levers 10 are then pushed through guide holes at the end of a nose portion 6, thus effecting the printing process.

Fig. 2 is a plan view seen from the left side of Fig. 3 and illustrating on an exaggerated scale the positional relation between the printing levers 10 and the printing wires 12 according to one embodiment of the present invention.

Referring to Fig. 2, the reference numeral 7 denotes a guide plate provided with two parallel rows of guide holes 8. The guide plate 7 is fixed to the end of nose portion 6 as shown in Fig. 3. The guide holes 8 serve to guide the printing ends of the printing wires 12 whose driven ends are fixed to the printing levers 10 as mentioned before. The printing levers 10 are positioned around these guide holes and, except for printing levers 10A, extend radially with respect to the corresponding guide hole 8 so that their axes pass through the projected centers of corresponding guide holes 8. The inner



19 OCT 1996

ends of the printing levers 10 are disposed outwards to have a projected distance 1 from the guide holes 8. The printing levers are arranged at spacings δ of, e.g. 0.2 mm, so that the printing wires 12 do not come into contact with each other.

On the other hand, printing levers 10A corresponding to guide holes 8A provided at both ends of the parallel rows of guide holes are arranged in such a manner that their axial lines 10a are displaced inwards from the projected centers of the corresponding guide holes 8A. Furthermore, printing levers 10A are placed to keep at least spacings δ between contiguous printing levers 10B. The two levers 10A on each side of the parallel rows are spaced apart by a distance defined by the two rows of guide holes 8. As in the case of the other printing levers 10, their inner ends are positioned at given distances 1 from the corresponding guide holes 8A.

As a result of this arrangement, angular deviations are caused between the axial lines 10a of the printing levers 10A and the projected axial lines 12a of the associated printing wires 12. In other words, an angle is formed between the axial line 10a of each printing lever 10A and the plane of the corresponding printing wire 12. It is, however, possible to reduce the curvature of the printing wires 12 connected to the printing levers 10A to the same value as that of the printing wires 12 connected to printing levers 10. The curvature or deflection corresponds to the projected distance 1 between the driven end corresponding to the joining point c with a printing lever 10A and the printing end d in Fig. 1. Hence, the printing can be surely performed under the same condition for all printing wires.

In accordance with the described embodiment, only the printing levers 10A are made to deviate from the projected centers of corresponding guide holes 8A to provide the necessary clearance δ between contiguous printing levers 10B and levers

19 OCT 1996

10A themselves. However, when a considerable processing or assembling accuracy is required in order to secure necessary clearances δ between the printing levers 10 because of a high density with which the printing levers are disposed, necessary gaps may be provided between adjacent printing levers 10 by having them deviating from the alignment shown in Fig. 2 in a manner, corresponding to printing levers 10A.

Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention. Desired figures and characters are printed on printing paper P arranged between platen 27 and ink ribbon 25 by impact dot head 20 mounted on carriage 26 which is supported movably in the printing column direction.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



19 OCT 1996

6

Claim

A dot matrix printer using a printing head comprising a plurality of printing wires (12), each having a printing end (d) and a driven end, said wires having their printing ends disposed in guide holes (8, 8A) arrayed in two parallel rows in a guide plate (7),

a plurality of printing levers (10), equal in number to the number of wires (12), each of said printing levers having an inner end portion connected to the driven end of one of said wires, and

driving means (3, 4, 5, 11) for driving said printing levers (10) to selectively move said wires between a printing position and a rest position,

characterized in that the axial lines (10a) of those of the printing levers (10A) connected to printing wires (12) guided by guide holes (8A) positioned in the vicinity of the end portion of the rows of guide holes, deviate from projected centers of said guide holes (8A), these printing levers being disposed to form gaps (δ) between adjacent ones of the other printing levers (10) and between themselves, enough to avoid a mutual interference of said printing wires.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



19 OCT 1996-

Abstract of the Disclosure Fig. 2

**DOT MATRIX PRINTER
HAVING AN IMPACT DOT PRINTING HEAD**

A dot matrix printer having an impact dot printing head is provided with a plurality of printing levers radially disposed with respect to guide holes arrayed at the end of a nose portion of the printing head. Printing wires (12) equal in number to the printing levers (10, 10A) are connected to the radially inner ends of the printing levers and guided by said guide holes (8, 8A). The lever axial lines (10a) of levers (10A) at the ends of the arrays of guide holes deviate from projected centers of the guide holes (8, 8A). Gaps (δ) are formed between adjacent levers to avoid a mutual interference between the printing wires.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



19 OCT 1996

1

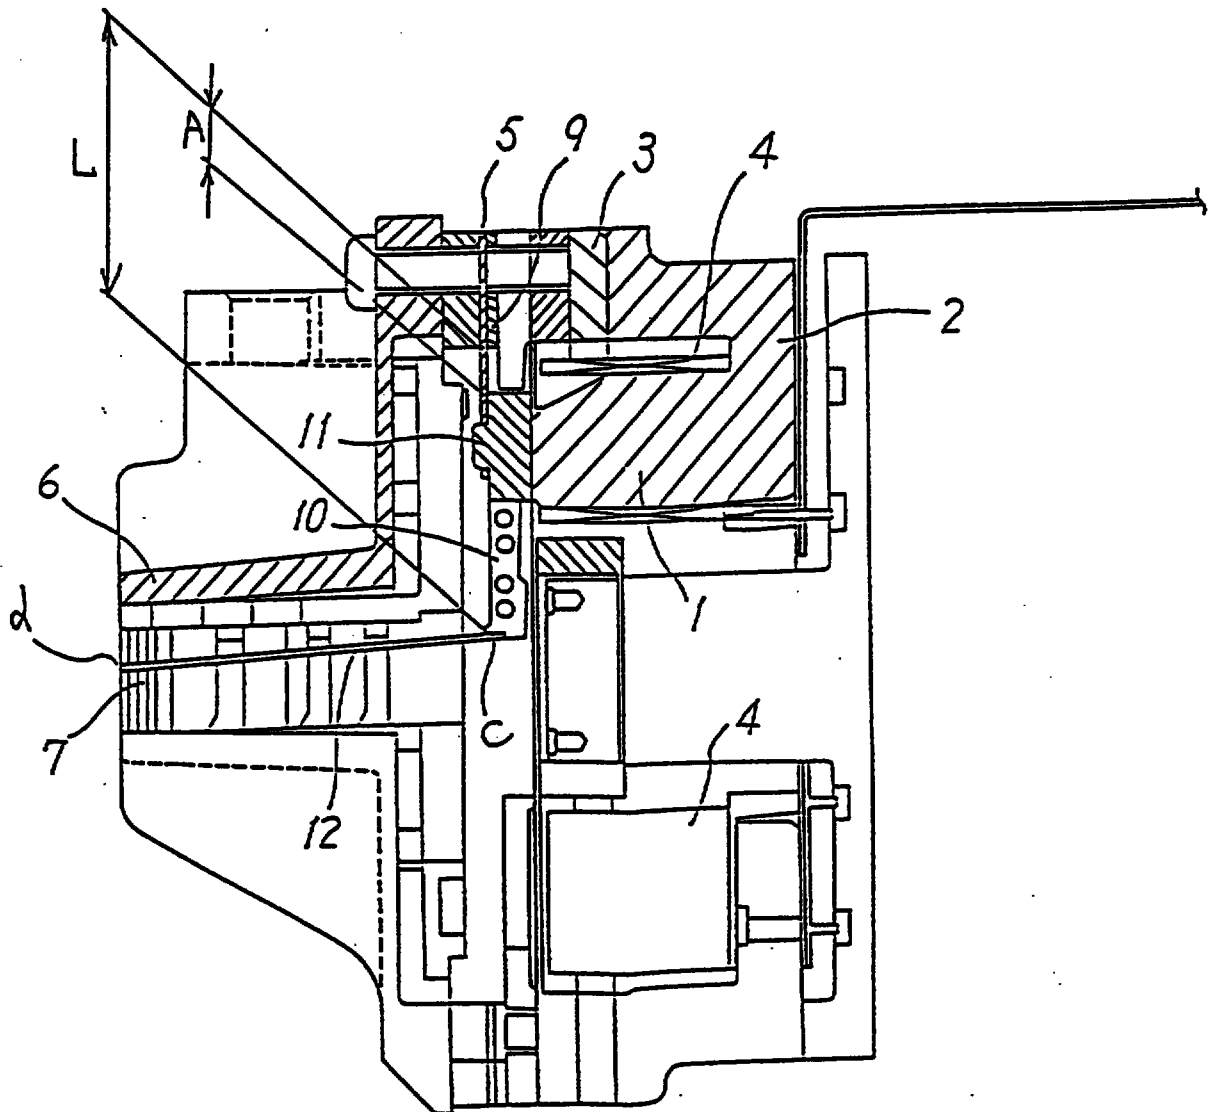


FIG. 1

THIS SHEET HAS BEEN
REPLACED

19 OCT 1996

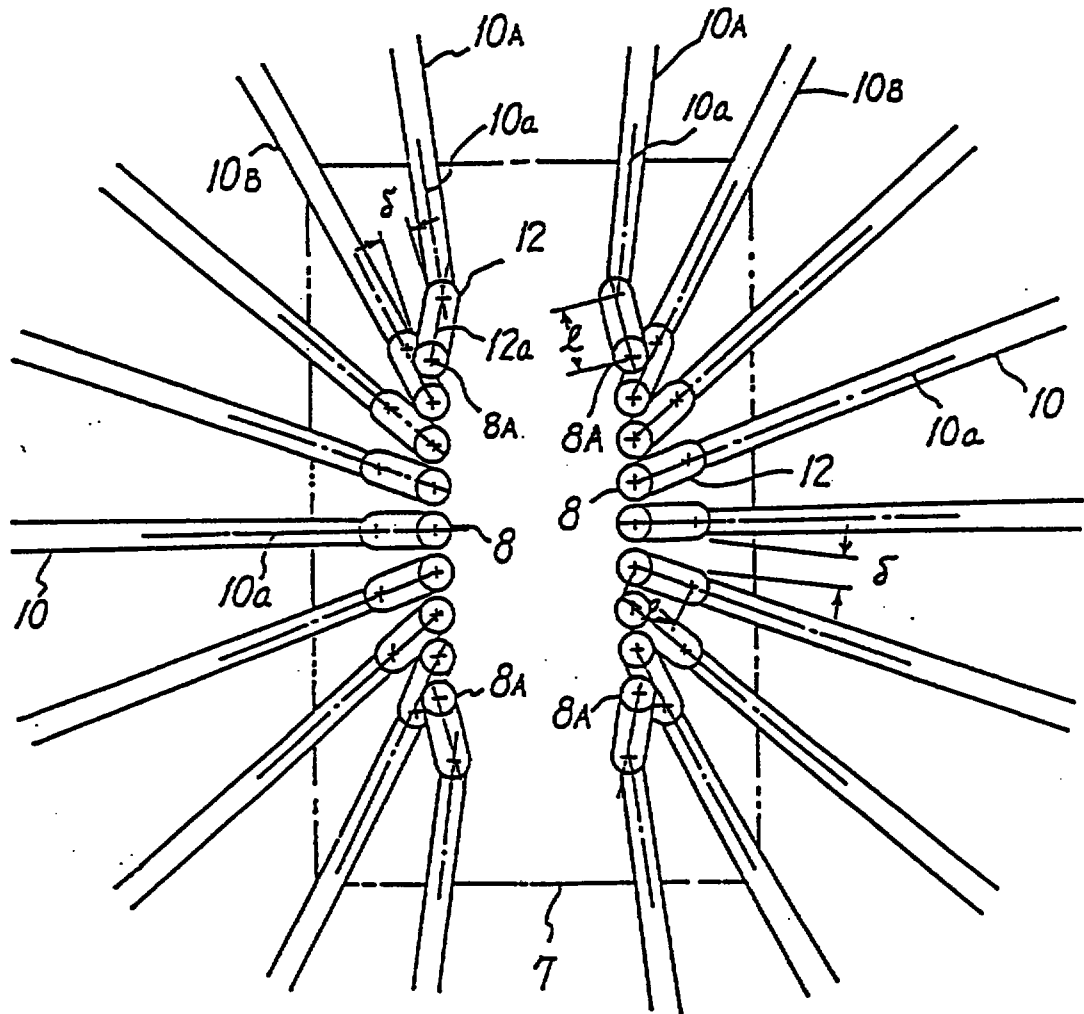


FIG. 2

19 OCT 1996

3

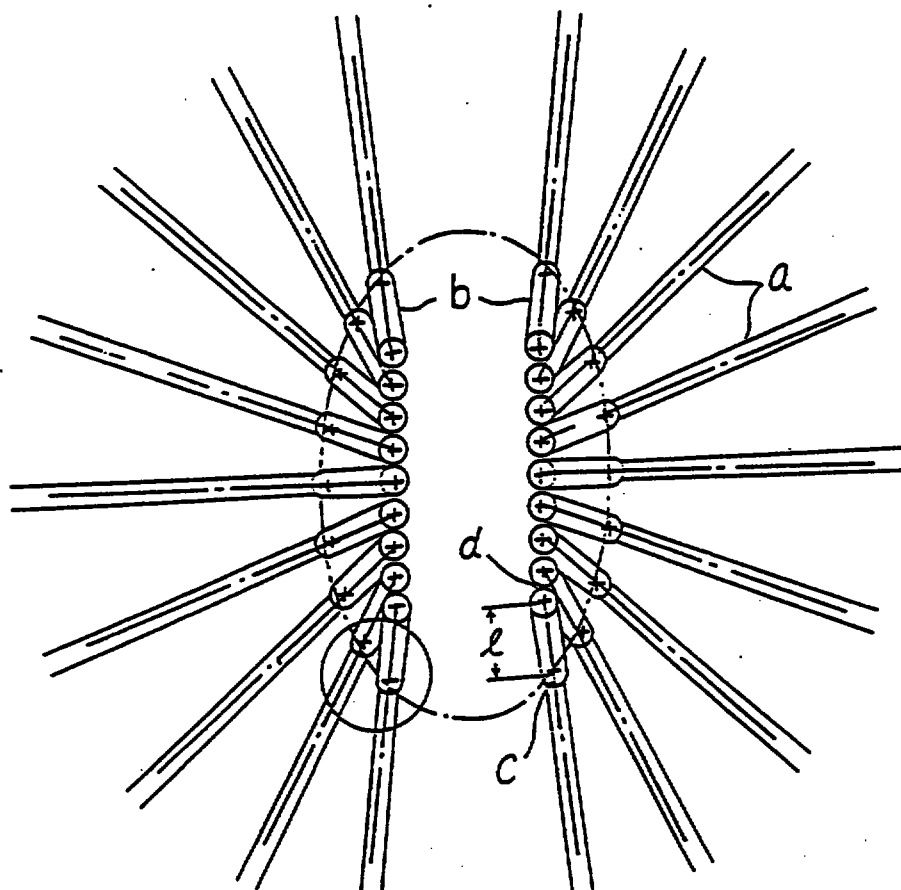


FIG. 3

19 OCT 1996

4

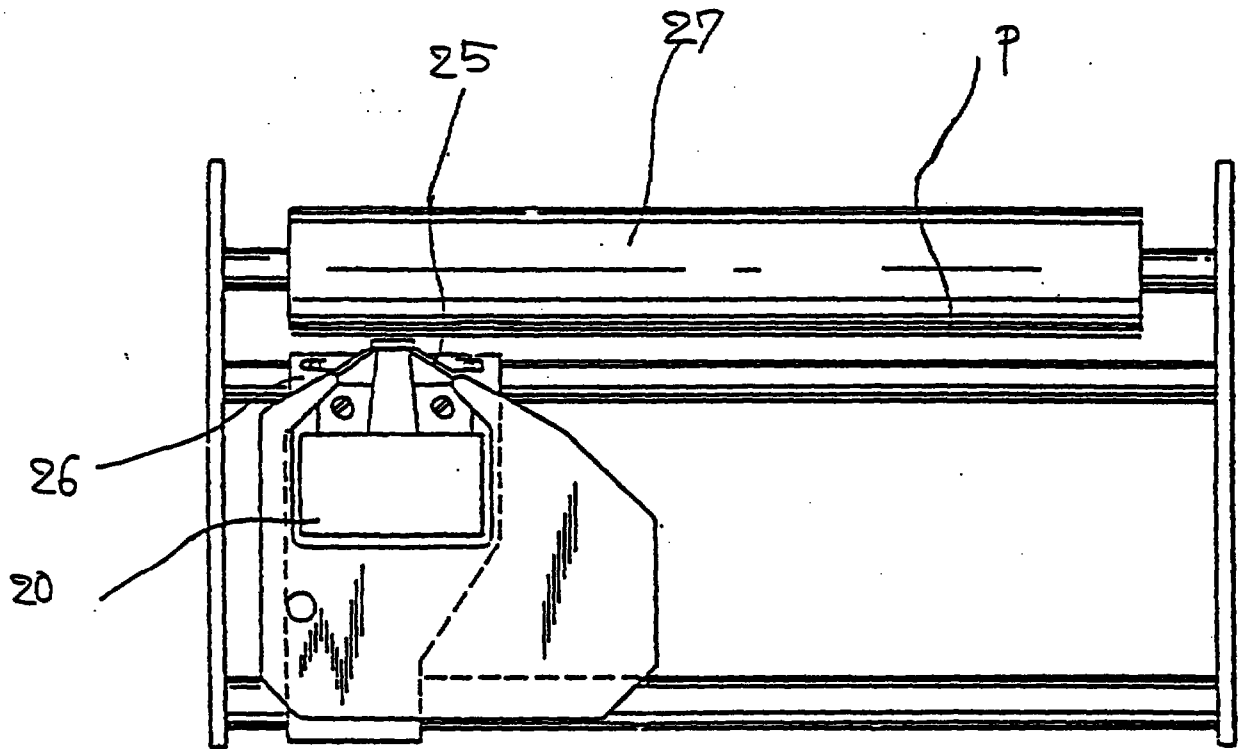


FIG. 4

T-8021030

Inventory of
the 10th

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEETS SG

☒ Description : paged 1... to paged 5...

☒ Claim(s) : paged 1... to paged 7...

☒ Drawing(s) : paged 1/4... to paged 4/4

☒ Abstract : paged 7... to paged 10...

DATE OF RECEIPT 06/19/98

REPLACEMENT SHEET

10 JUL 1998

9605468-7
 1905 copy

1 DOT MATRIX PRINTER

HAVING AN IMPACT DOT PRINTING HEAD

The present invention relates to a dot matrix printer.

Both, enhancement in printing quality and speed-up in printing process are highly required for a dot matrix printer, conceived as a computer terminal equipment, for forming patterns of characters or the like on a recording medium by use of printing wires. The printing head, disclosed in US-A-4,669,898 and JP-A-29681/1983, has been developed to meet this requirement. In this known printing head, the printing ends of the printing wires are disposed in two parallel rows of guide holes provided at the front end of a nose portion of the printing head. A plurality of electromagnetically actuated armatures or printing levers have their movable ends connected to the driven ends of the printing wires. As illustrated in Fig. 3, all of the printing levers a are radially disposed with respect to said guide holes and have their movable ends positioned on an elliptical line, so as to minimize the curvatures of all of the printing wires. Thus, with this configuration, a projected distance l from the joining point c between the driven end of a printing wire b and the corresponding inner end of a printing lever a on the one hand to the printing end of the printing wire b on the other hand is shortened. The minimized curvature or deflection of the printing wires results in a reduced friction between the printing wires and the guide holes. Besides, the entire length of the printing wires b is also shortened, thus decreasing their inertia. Therefore, the known configuration serves to increase the velocity of the printing process.

However, when the inner ends of the printing levers a are concentrated on an elliptical line at the head center, ad-

10.30 1998

jacent printing wires b come excessively close to each other in a region encircled by a circle in Fig. 3, namely a region where the curvature of the ellipse is large. As a result, it is impossible to provide a higher number of printing wires as would be required to enhance the printing quality. In addition, the problem may occur that contiguous printing wires come into contact with each other. To avoid this, a high accuracy of manufacturing and assembling the individual parts of the printing head is necessary and leads to increased manufacturing costs.

JP-A-60-212361 discloses a dot matrix printer using a printing head comprising a plurality of printing wires each having a printing end and a driven end, said wires having their printing ends disposed in guide holes arrayed in four parallel rows in a guide plate, a plurality of printing levers equal in number to the number of wires each of said printing levers having an inner end portion connected to the driven end of one of said wires, and driving means for driving said printing levers to selectively move said wires between a printing position and a rest position. The axial lines of those of the printing levers connected to printing wires guided by guide holes positioned in the vicinity of the end portions of the rows of guide holes, deviate from projected centers of said guide holes, these printing levers being disposed to form gaps between adjacent ones of the other printing levers and between themselves to avoid a mutual interference of said printing wires. The inner end portions of the printing levers are arranged on a circle surrounding the parallel rows of guide holes.

It is a primary object of the present invention to remedy the foregoing problems of the prior art and to provide a printing head for a dot matrix printer which allows the printing quality to be enhanced and the printing speed to be increased to the greatest possible degree without necessitating a remarkable enhancing of the accuracy of its parts and of the assembly.

This object is solved with a printer as claimed.

Ways of carrying out the invention are described in detail below with reference to the drawings which illustrate only specific embodiments, and in which:

Fig. 1 is a sectional view showing one example of a printing head to which the present invention is applied,

10 JUL 1998

3

- Fig. 2 is a diagram explaining the positional relation between the printing levers and the printing wires according to an embodiment of the present invention,
- Fig. 3 is a diagram explaining the positional relation between the printing levers and the printing wires according to the prior art, and
- Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention.

Turning first to Fig. 1, there is shown one example of the printing head to which the present invention is applied. In Fig. 1, a plurality of cores, generally designated at 1, are protruded over the surface of an annular magnetic plate 2. Disposed on the respective end surfaces of cores 1 vis-à-vis with each other are armatures 11 fixed to printing levers 10. While no printing is performed, magnetic fluxes from permanent magnets 3 secured to the surface of magnetic plate 2 act to hold armatures 11 by attraction against the resilient forces of plate springs 5. During printing, the attraction of armatures 11 is released when electromagnetic coils 4 wound on cores 1 are selectively energized by electric current to negate the permanent magnetic fluxes. Due to the resilient force of the plate springs 5, printing wires 12 connected to the radially inner ends of the printing levers 10 are then pushed through guide holes at the end of a nose portion 6, thus effecting the printing process.

Fig. 2 is a plan view seen from the left side of Fig. 3 and illustrating on an exaggerated scale the positional relation between the printing levers 10 and the printing wires 12 according to one embodiment of the present invention.

Referring to Fig. 2, the reference numeral 7 denotes a guide plate provided with two parallel rows of guide holes 8. The

10 JUL 1998

4

guide plate 7 is fixed to the end of nose portion 6 as shown in Fig. 1. The guide holes 8 serve to guide the printing ends d of the printing wires 12 whose driven ends are fixed to the printing levers 10 as mentioned before. The printing levers 10 are positioned around these guide holes and, except for printing levers 10A, extend radially with respect to the corresponding guide hole 8 so that their axes pass through the projected centers of corresponding guide holes 8. The inner ends of the printing levers 10 are disposed outwards to have a projected distance l from the guide holes 8. The printing levers are arranged at spacings δ of, e.g. 0.2 mm, so that the printing wires 12 do not come into contact with each other.

On the other hand, printing levers 10A corresponding to guide holes 8A provided at both ends of the parallel rows of guide holes are arranged in such a manner that their axial lines 10a are displaced inwards from the projected centers of the corresponding guide holes 8A. Furthermore, printing levers 10A are placed to keep at least spacings δ between contiguous printing levers 10B. The two levers 10A on each side of the parallel rows are spaced apart by a distance defined by the two rows of guide holes 8. As in the case of the other printing levers 10, their inner ends are positioned at given distances l from the corresponding guide holes 8A.


As a result of this arrangement, angular deviations are caused between the axial lines 10a of the printing levers 10A and the projected axial lines 12a of the associated printing wires 12. In other words, an angle is formed between the axial line 10a of each printing lever 10A and the plane of the corresponding printing wire 12. It is, however, possible to reduce the curvature of the printing wires 12 connected to the printing levers 10A to the same value as that of the printing wires 12 connected to printing levers 10. The curvature or deflection corresponds to the projected distance l between the driven end corresponding to the joining point c

10 JUL 1998

with a printing lever 10A and the printing end d in Fig. 1. Hence, the printing can be surely performed under the same condition for all printing wires.

In accordance with the described embodiment, only the printing levers 10A are made to deviate from the projected centers of corresponding guide holes 8A to provide the necessary clearance δ between contiguous printing levers 10B and levers 10A themselves. However, when a considerable processing or assembling accuracy is required in order to secure necessary clearances δ between the printing levers 10 because of a high density with which the printing levers are disposed, necessary gaps may be provided between adjacent printing levers 10 by having them deviating from the alignment shown in Fig. 2 in a manner, corresponding to printing levers 10A.

Fig. 4 is a schematic plan view of a wire dot printer showing an embodiment in accordance with the present invention. Desired figures and characters are printed on printing paper P arranged between platen 27 and ink ribbon 25 by impact dot head 20 mounted on carriage 26 which is supported movably in the printing column direction.

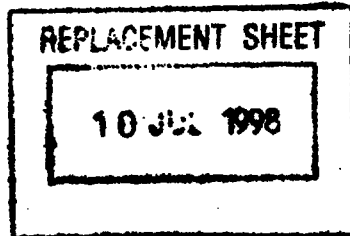

REPLACEMENT SHEET

6



Claim


A dot matrix printer using a printing head comprising a plurality of printing wires (12), each having a printing end (d) and a driven end, said wires having their printing ends disposed in guide holes (8, 8A) arrayed in two parallel rows in a guide plate (7),

a plurality of printing levers (10), equal in number to the number of wires (12), each of said printing levers having an inner end portion (c) connected to the driven end of one of said wires, and

driving means (3, 4, 5, 11) for driving said printing levers (10, 10A) to selectively move said wires between a printing position and a rest position,

wherein the axial lines (10a) of those of the printing levers (10A) connected to printing wires (12) guided by guide holes (8A) positioned in the vicinity of the end portion of the rows of guide holes, deviate from projected centers of said guide holes (8A), these printing levers being disposed to form gaps (δ) between adjacent ones of the other printing levers (10) and between themselves, enough to avoid a mutual interference of said printing wires., and

wherein said inner and portions (c) of all printing levers (10, 10A) are positioned at the same projected distance (l) from the respective guide holes (8, 8A).

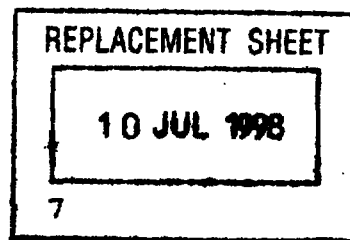

REPLACEMENT SHEET

Abstract of the Disclosure Fig. 2

**DOT MATRIX PRINTER
HAVING AN IMPACT DOT PRINTING HEAD**

A dot matrix printer having an impact dot printing head is provided with a plurality of printing levers radially disposed with respect to guide holes arrayed at the end of a nose portion of the printing head. Printing wires (12) equal in number to the printing levers (10, 10A) are connected to the radially inner ends of the printing levers and guided by said guide holes (8, 8A). The lever axial lines (10a) of levers (10A) at the ends of the arrays of guide holes deviate from projected centers of the guide holes (8, 8A). Gaps (6) are formed between adjacent levers to avoid a mutual interference between the printing wires.

1

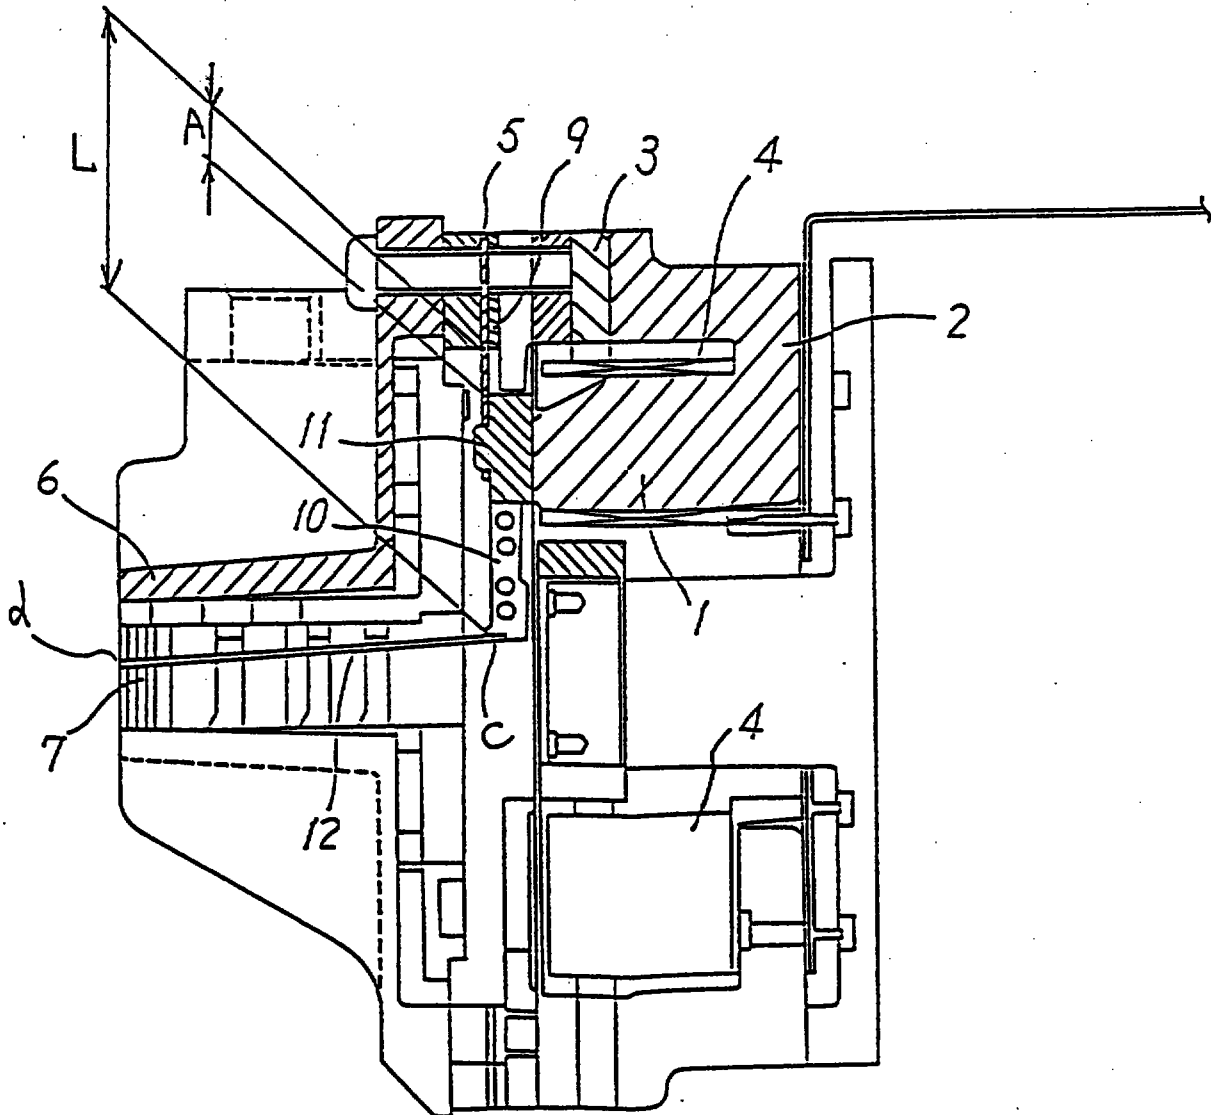


FIG. 1

10 JUL 1998

3

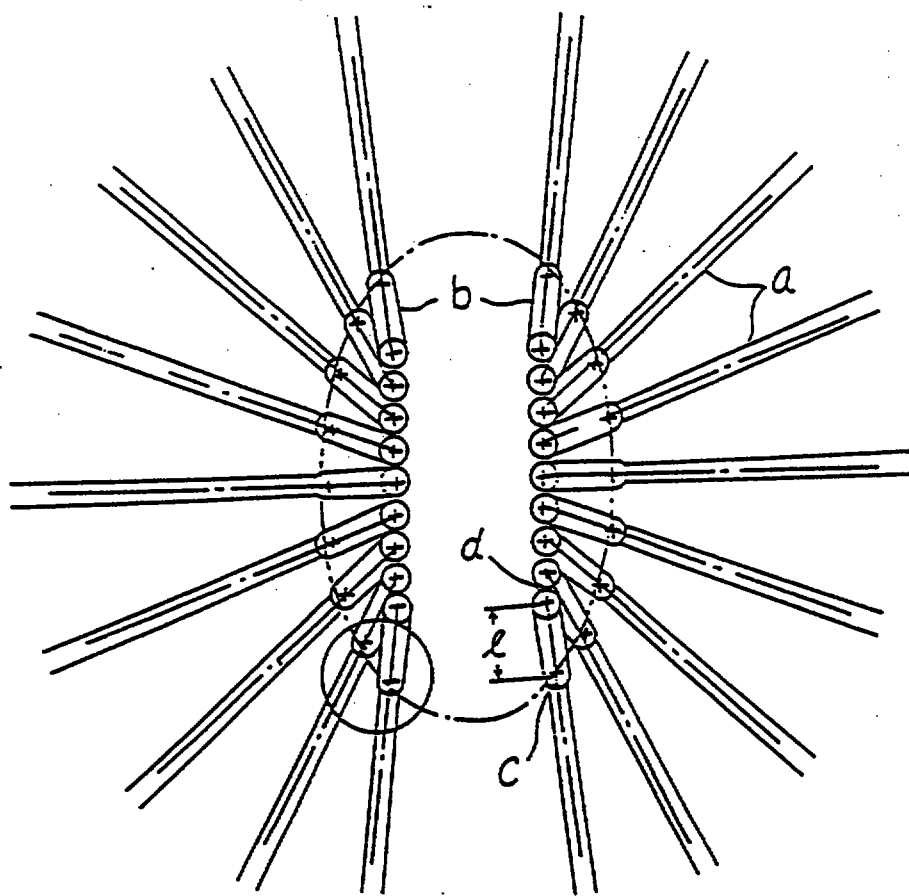


FIG. 3

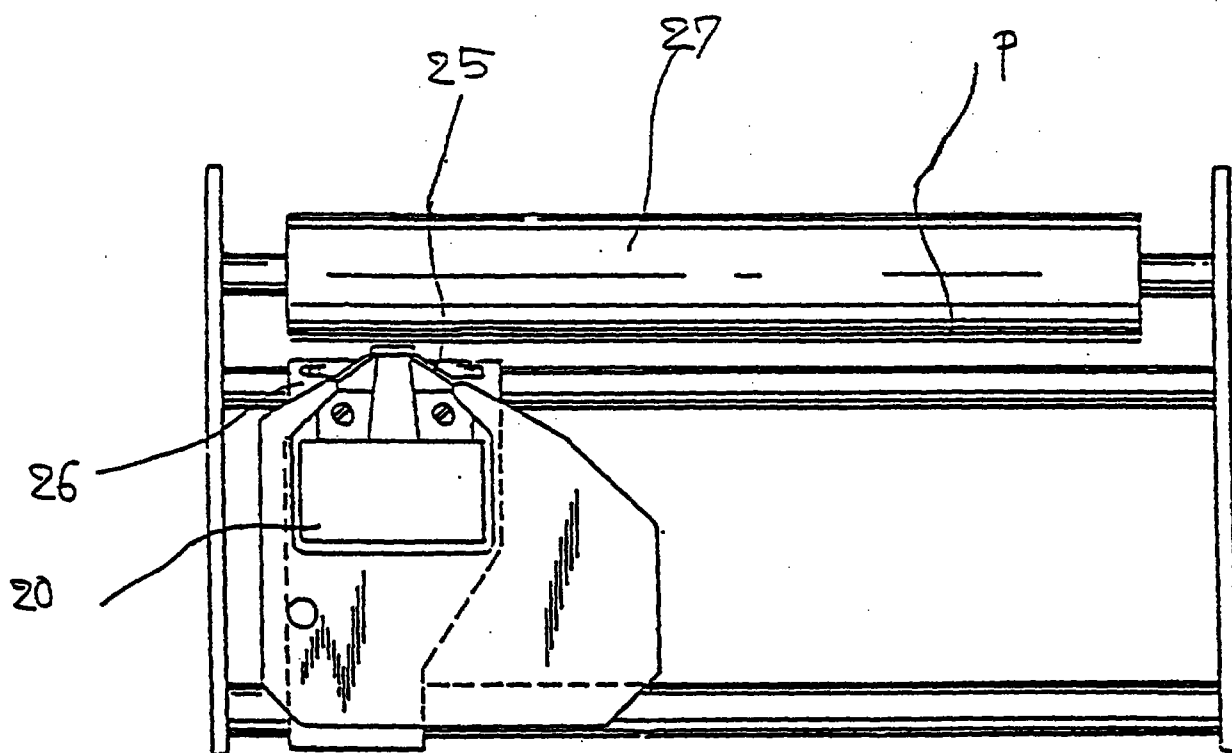


FIG. 4