



- (51) **International Patent Classification:**
B05D 3/04 (2006.01) *B05D 7/04* (2006.01)
- (21) **International Application Number:**
PCT/US2012/044462
- (22) **International Filing Date:**
27 June 2012 (27.06.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/504,021 1 July 2011 (01.07.2011) US
61/530,814 2 September 2011 (02.09.2011) US
- (71) **Applicant (for all designated States except US):** CAM-
BRIOS TECHNOLOGIES CORPORATION [US/US];
930 East Arques Avenue, Sunnyvale, California 94085
(US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** PSCHENITZKA,
Florian [DE/US]; Apt. 1, 1855 Alabama Street, San Fran-
cisco, California 94110 (US). WESTWATER, Jonathan
[GB/JP]; 3-16-6 Ozenji Nishi, Asao-ku, Kawasaki-shi,
Kanagawa 215-0017 (JP).
- (74) **Agents:** HAN, Hai et al.; Seed Intellectual Property Law
Group PLLC, Suite 5400, 701 Fifth Avenue, Seattle,
Washington 98104-7064 (US).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

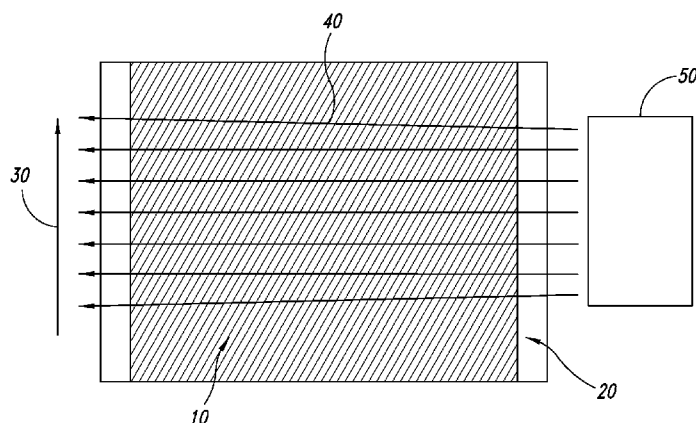
(54) **Title:** ANISOTROPY REDUCTION IN COATING OF CONDUCTIVE FILMS

FIG. 1

(57) **Abstract:** Provided herein is a method of forming a conductive film, the method comprising: providing a coating solution having a plurality of conductive nanostructures and a fluid carrier; moving a web in a machine direction; forming a wet film by depositing the coating solution on the moving web, wherein the wet film has a first dimension extending parallel to the machine direction and a second dimension transverse to the machine direction; applying an air flow across the wet film along the second dimension, whereby at least some of the conductive nanostructures in the wet film are reoriented; and allowing the wet film to dry to provide the conductive film.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*