

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 July 2002 (25.07.2002)

PCT

(10) International Publication Number
WO 02/057567 A3

(51) International Patent Classification⁷: **E04H 17/14**

(21) International Application Number: PCT/US02/01213

(22) International Filing Date: 16 January 2002 (16.01 2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/767,005 22 January 2001 (22.01.2001) US
09/871,204 31 May 2001 (31.05.2001) US

(71) Applicant: **CONSTRUCTION SPECIALTIES, INC.**
[US/US]. 3 Werner Way, Lebanon, NJ 08833 (US).

(72) Inventors: **BARTLETT, Gary, F.**, 611 South Main Street,
Muncy, PA 17756 (US). **FENSTERMACHER, James,
G.**, 130 Crawley Street, Hughesville, PA 17737 (US).

(74) Agent: **BUTTER, Gary, M.**, Baker Botts LLP, 30 Rocke-
feller Plaza, New York, NY 10112-0228 (US)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)


Published:

— with international search report

(88) Date of publication of the international search report:
10 October 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

(54) Title: RAIL AND SUPPORTS THEREFOR

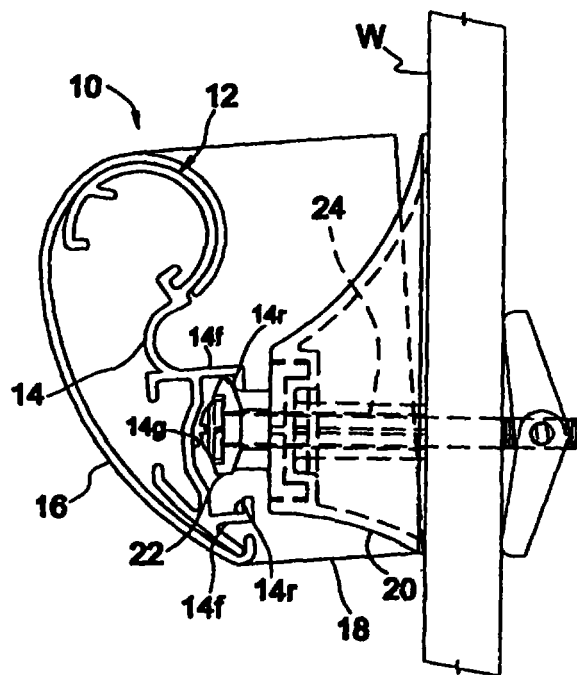

(57) Abstract: A rail (12) has an axially extending undercut groove (14G) of a uniform generally "C" shaped cross-section which is supported by supports (10) attached to the rail (12) in spaced-apart relation. Each support (10) includes a bracket (20) and a lock member (22) attached to the bracket (20) for rotation and against displacement of the lock member (22) relative to the bracket (20). The lock member (22) includes a locking cam portion (60), which is received in an undercut groove.

WO 02/057567 A3

162162