



- (51) **International Patent Classification:**
E04F 13/08 (2006.01) *E04F 13/04* (2006.01)
E04B 5/36 (2006.01)
- (21) **International Application Number:**
PCT/EP2014/058197
- (22) **International Filing Date:**
23 April 2014 (23.04.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
1353731 24 April 2013 (24.04.2013) FR
- (71) **Applicant:** ROCKWOOL INTERNATIONAL A/S
[DK/DK]; Hovedgaden 584, DK-2640 Hedehusene (DK).
- (72) **Inventor:** LE MADEC, Bruce; 47 avenue Aristide Briand, F-92350 Le Plessis Robinson (FR).
- (74) **Agent:** DE KERNIER, Gabriel; Cabinet NETTER, 36 avenue Hoche, F-75008 Paris (FR).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** INSULATING PANELS MADE OF STONE WOOL, AND CONCRETE WALL PROVIDED WITH SUCH PANELS

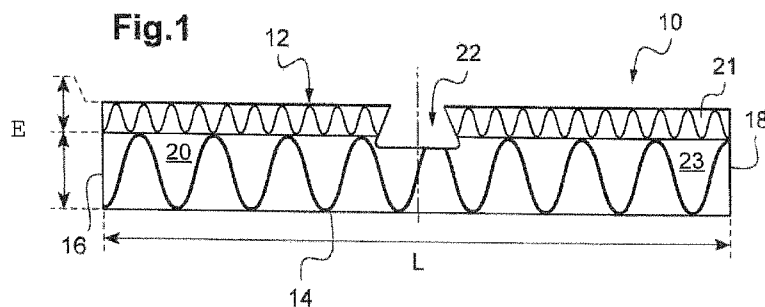

(57) **Abstract:** Insulating panel (10) having a top face (12) and a bottom face (14) opposite the top face, comprising a body (20) made of stone wool with a part of substantially uniform first density and a part of substantially uniform second density, different from the first density, at least one profiled groove (22) being formed in said insulating panel starting from the top face (12) being made of stone wool, the groove (22) being formed in the stone wool, the number of grooves being less than or equal to three for 60 cm of a dimension of said panel perpendicular to the direction of the grooves.