(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
16 October 2014 (16.10.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/166993 A1

(51) International Patent Classification:
A61N 5/06 (2006.01)

(21) International Application Number:
PCT/EP2014/057148

(22) International Filing Date:
9 April 2014 (09.04.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1306369.8 9 April 2013 (09.04.2013) GB

(71) Applicant: **PHOTOCURE ASA** [NO/NO]; Hoffsveien 4, NO-0275 Oslo (NO).

(72) Inventor: **GROSETH, Morten**; Amagerveien 2D, N-0771 Oslo (NO).

(74) Agents: **TAYLOR, Adam** et al.; Dehns, St Bride's House, 10 Salisbury Square, London EC4Y 8JD (GB).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

WO 2014/166993 A1

(54) Title: IRRADIATION DEVICE

Fig. 6

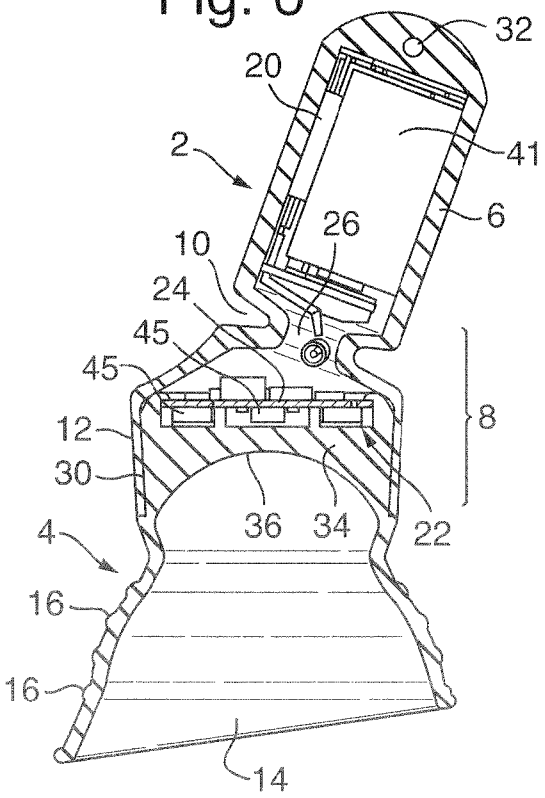

(57) Abstract: An irradiation device for insertion into an orifice of the body to provide photodynamic therapy comprises: a housing moulded from a resilient material and adapted to be fully inserted and secured in the orifice, the housing enclosing an LED lamp system 22 and a power source 41 for powering the LED lamp system 22; wherein the device is independently operational while located in the orifice; characterised in that: the housing comprises a first housing part 2 for holding the power source 41 and a second housing part 4 for holding the LED lamp system 22, the first and second housing parts 2, 4 being separable and being preferably formed separately from the LED lamp system 22; and in that the first housing part 2 consists of a chamber 6 for holding the power source 41 and an opening 26 into the chamber 6 is provided through a resilient opening part 8, wherein the chamber 6 is closed when the first housing part 2 is joined to the second housing part 4.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*