



(43) International Publication Date
4 October 2012 (04.10.2012)

- (51) International Patent Classification:
A62B 35/04 (2006.01) *A62B 35/00* (2006.01)
- (21) International Application Number:
PCT/EP2012/054284
- (22) International Filing Date:
12 March 2012 (12.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1104997.0 25 March 2011 (25.03.2011) GB
- (71) Applicant (for all designated States except US): **UNIL-
INE SAFETY SYSTEMS LIMITED** [GB/GB]; 5a Merse
Road, North Moons Moat, Redditch Worcestershire B98
9HL (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HIRST, Robert**
[GB/GB]; Uniline Safety Systems Limited, 5a Merse Road,
North Moons Moat Industrial Estate, Redditch Worcester-
shire B98 9HL (GB).
- (74) Agent: **JACKSON, Derek Charles**; Derek Jackson Asso-
ciates, The Old Yard, Lower Town, Claines, Worcester
Worcestershire WR3 7RY (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SAFETY ANCHOR

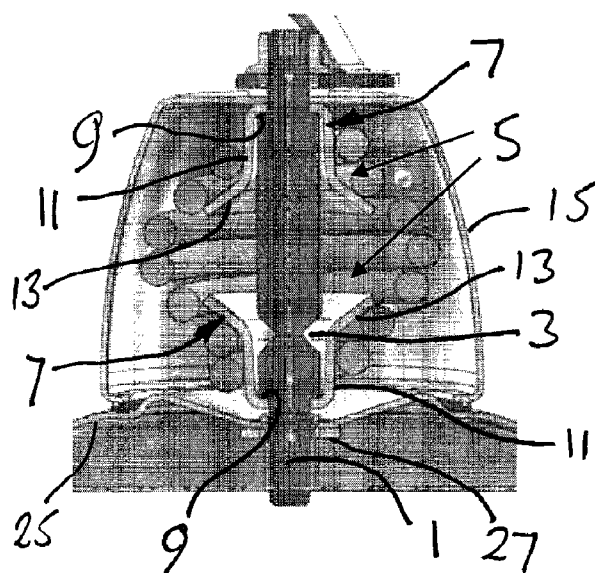


Fig. 1

(57) Abstract: A safety anchor includes a coiled spring (5) and a stud (1) extending substantially centrally within the spring. The stud (1) is formed with a portion (3) of reduced strength. Means (7, 9) is provided for securing ends of the spring (5) to the stud (1) at each side of the portion (3) of reduced strength.