




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B41J 2/00		A1	(11) International Publication Number: WO 00/35675
			(43) International Publication Date: 22 June 2000 (22.06.00)
(21) International Application Number: PCT/AU99/01023		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 18 November 1999 (18.11.99)			
(30) Priority Data: PP 7737 16 December 1998 (16.12.98) AU PP 7738 16 December 1998 (16.12.98) AU PP 9961 23 April 1999 (23.04.99) AU PP 9962 23 April 1999 (23.04.99) AU			
(71) Applicant (for all designated States except US): SILVERBROOK RESEARCH PTY LTD [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU).		Published With international search report.	
(72) Inventors; and (75) Inventors/Applicants (for US only): SILVERBROOK, Kia [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU). LAPSTUN, Paul [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU). WALMSLEY, Simon, Robert [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU). KING, Tobin [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU).			
(74) Agent: F.B. RICE & CO.; 605 Darling Street, Balmain, NSW 2041 (AU).			

(54) Title: A PRINTER FOR INCORPORATION INTO CONSUMER ELECTRONIC (CE) SYSTEMS WITH LIMITED ACCESS

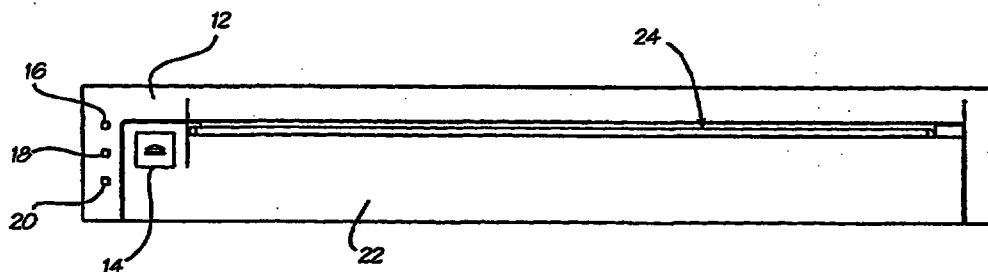

(57) Abstract

A printer system includes a housing (26); a front panel (12) arranged at the end of the housing (26), the front panel (12) having an opening (24) defined therein; a carrier (22) slidably arranged relative to the housing (26) to be movable in the opening (24), between a retracted position and an ejected position, the carrier (22) carrying: a receptacle (22) for a supply of print media; a receptacle (32) for a supply of ink; and a print engine including a page width printhead.