



(51) International Patent Classification:
F25B 49/02 (2006.01) *F25B 40/00* (2006.01)
F25B 9/00 (2006.01)

(21) International Application Number:
PCT/US2011/027363

(22) International Filing Date:
7 March 2011 (07.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/311,601 8 March 2010 (08.03.2010) US

(71) Applicant (for all designated States except US): **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, CT 06034 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LIU, Lucy Yi** [US/US]; 5003 Saddlebrook Drive, Fayetteville, New York 13066 (US). **DURASAMY, Suresh** [US/US]; 4046 Plum Yew Circle, Liverpool, New York 13090 (US). **HOFSDAL, Gilbert B.** [US/US]; 2381 Old Route 5,

Chittenango, New York 13037 (US). **HUFF, Hans-Joachim** [DE/DE]; Ingostrasse 11, 12105 Berlin (DE). **PATRIAK, Michal** [US/US]; 123 Vanida Drive, Camillus, New York 13031 (US).

(74) Agent: **HABELT, William W.**; 250 South Clinton Street, Suite 300, Syracuse, New York 13202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: REFRIGERANT DISTRIBUTION APPARATUS AND METHODS FOR TRANSPORT REFRIGERATION SYSTEM

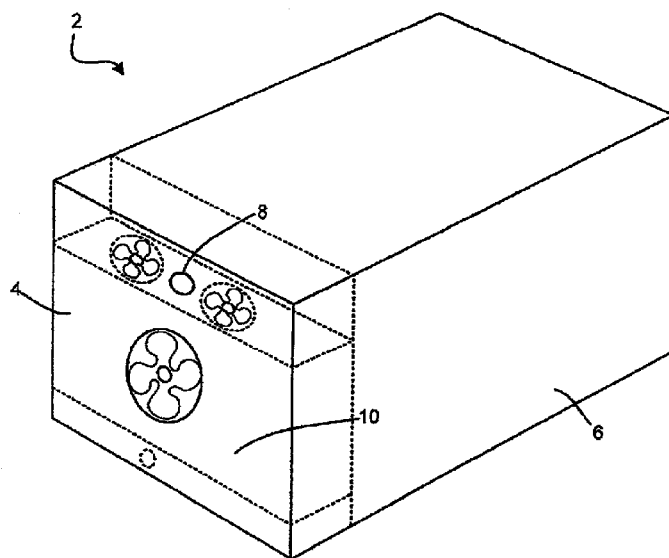


FIG. 1

(57) Abstract: Embodiments of apparatus, transport refrigeration units, and methods for operating the same can control refrigerant compression device restart for a refrigerant vapor compression system. Embodiments can provide control for transitioning a refrigerant vapor compression system to an economized mode.



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*